

preliminary

1.25Gbps Burst Mode GEPON ONU PX10 Small Form Factor BIDI Transceiver

Features

- Compliant with IEEE 802.3ah
- 1310nm FP LD burst mode transmitter
- 1490nm PIN diode continuous mode receiver
- Industrial standard SFF MSA 2 X 5 pin footprint
- SC/ST/FC connector interface
- Transmitter disable function
- Receiver signal detect function
- LVPECL logic interface, DC or AC coupling
- Single supply 3.3V
- Transmission distance up to 10Km



Specifications


| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---|--------------------------------------|--|--------|---|------|
| Transmitter | | | | | |
| Data Rate (NRZ) | B | - | 1250 | - | Mb/s |
| Optical Output Power (avg.) ^{(1) (2) (3)} | P _O | -3 | - | +2 | dBm |
| Extinction Ratio | ER | 6 | - | - | dB |
| Optical Wavelength | λ_C | 1270 | 1310 | 1360 | nm |
| Spectral Width (RMS) | $\Delta\lambda$ | - | - | 2.5 | nm |
| Output Rise Time (20-80%) | t _r | - | - | 0.26 | ns |
| Output Fall Time (20-80%) | t _f | - | - | 0.26 | ns |
| Burst Turn On Time ⁽⁸⁾ | t _{burst-on} | - | - | 64 | ns |
| Burst Turn Off Time ⁽⁸⁾ | t _{burst-off} | - | - | 64 | ns |
| Burst Enable Time ⁽⁸⁾ | t _{burst-en} | 600 | - | - | ns |
| Burst Disable Time ⁽⁸⁾ | t _{burst-dis} | 100 | - | - | ns |
| Data Input ⁽⁶⁾ | V _{IL} V _{IH} | V _{CC} -1.810 V _{CC} -1.165 | - - | V _{CC} -1.475 V _{CC} -0.88 | V |
| Tx Disable Input | V _{DIL} V _{DIH} | 0 2 | - - | 0.8 V _{CC} | V |
| Optical Output Power (avg.) of Tx Disable | P _{Off} | - | - | -45 | dBm |
| Supply Voltage | V _{CC} | 3.10 | 3.3 | 3.50 | V |
| Supply Current | I _{CC} | - | - | 110 | mA |
| Receiver | | | | | |
| Data Rate (NRZ) | B | - | 1250 | - | Mb/s |
| Optical Input (avg.) Sensitivity ^{(1) (5)} | P _{IN} | - | - | -25 | dBm |
| Saturation | P _{SAT} | -3 | 0 | - | dBm |
| Optical Wavelength | λ | 1480 | - | 1500 | nm |
| Output Rise Time (20-80%) | t _r | - | - | 0.4 | ns |
| Output Fall Time (20-80%) | t _f | - | - | 0.4 | ns |
| Data Output ⁽⁶⁾ | V _{OL} V _{OH} | V _{CC} -1.840 V _{CC} -1.045 | - - | V _{CC} -1.62 V _{CC} -0.88 | V |
| Signal Detect Asserted (avg.) | P _A | - | - | -25 | dBm |
| Signal Detect Deasserted (avg.) | P _D | -35 | - | - | dBm |

1.25Gbps Burst Mode GEPON ONU PX10 Small Form Factor BIDI Transceiver

| | | | | | |
|----------------|-----------|------|-----|------|----|
| Hysteresis | P_{HYS} | - | 2 | - | dB |
| Supply Voltage | V_{CC} | 3.10 | 3.3 | 3.50 | V |
| Supply Current | I_{CC} | - | - | 100 | mA |

Note:

- (1) With 0.275 NA, 9/125 μ m fiber.
- (2) Driven with a differential signal.
- (3) Class 1 eye safe per FDA and IEC.
- (4) Eye mask diagram is compliant to IEEE802.3ah Eye Diagram
- (5) 2^7-1 PRBS, BER= 10^{-12} .
- (6) Compatible with LVPECL logic levels.
- (7) The transmitter output should not be viewed directly.
- (8) Timing parameter define :

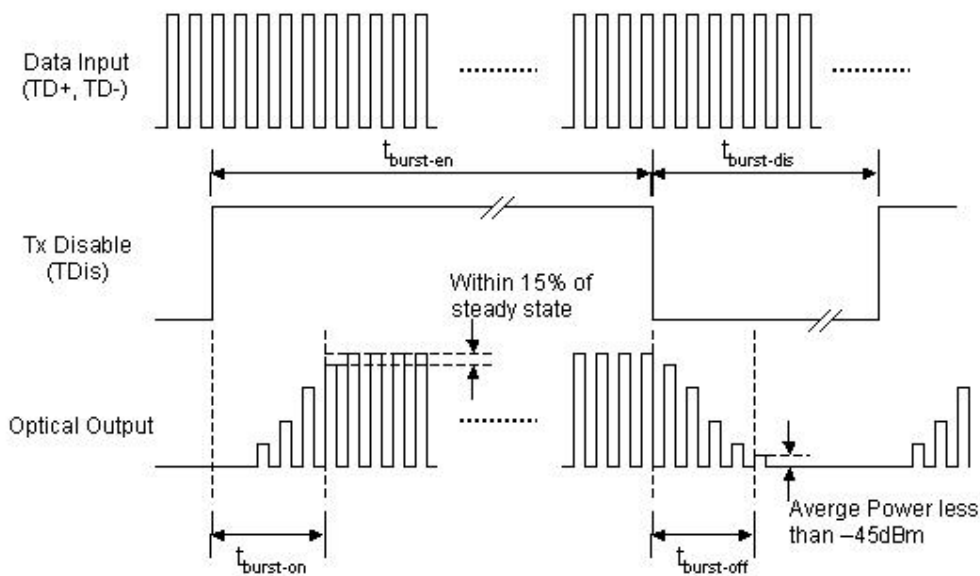

Absolute Maximum Ratings

| Parameter | Min. | Max. | Unit |
|-----------------------|------|--------|------------------|
| Operating Temperature | 0 | 70 | $^{\circ}$ C |
| Storage Temperature | -40 | 85 | $^{\circ}$ C |
| Lead Soldering Limits | - | 240/10 | $^{\circ}$ C/sec |
| Supply Voltage | -0.2 | 4 | V |



1.25Gbps Burst Mode GEPON ONU PX10 Small Form Factor BIDI Transceiver

Ordering Information

SNS-TR13R49 - 3 - 3 - 2 3 N 1

Data Coupling & SD Output Level :

| Symbol | Tx Coupling | Rx Coupling | SD |
|--------|-------------|-------------|------|
| C | AC | DC | PECL |
| D | AC | DC | TTL |
| E | AC | AC | PECL |
| F | AC | AC | TTL |
| G | DC | DC | PECL |
| H | DC | DC | TTL |
| I | DC | AC | PECL |
| J | DC | AC | TTL |

Connector Type :

SC : SC Connector

FC : FC Connector

ST : ST Connector

Package Type :


P : Pigtail

R : Receptacle


1.25Gbps Burst Mode GEAPON ONU PX10 Small Form Factor BIDI Transceiver

Outline Drawing

Pigtail 2x5 pins SFF

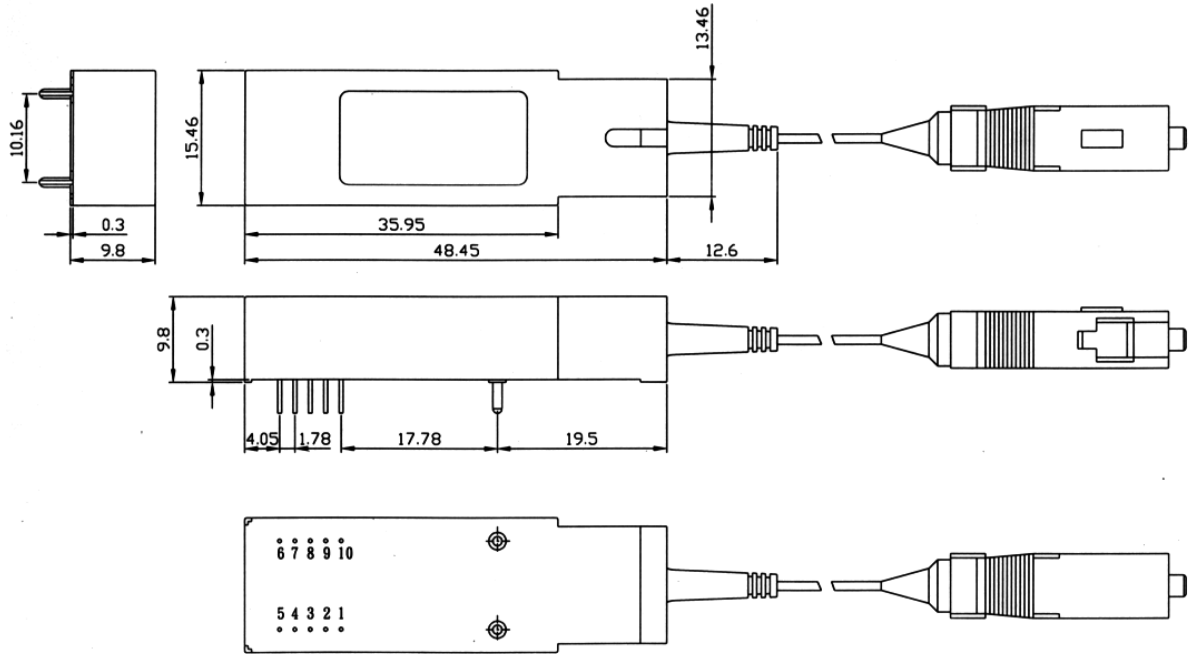

Receptacle 2x5 pins SFF

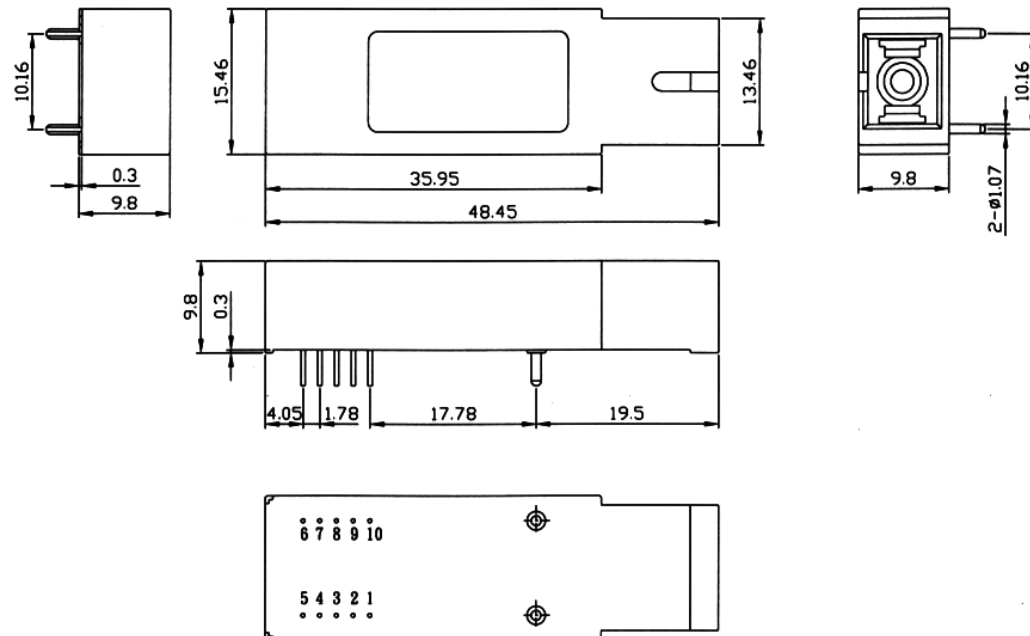


1.25Gbps Burst Mode GEPON ONU PX10 Small Form Factor BIDI Transceiver

Pinout Description

| Pin No. | Symbol | Description |
|---------|------------------|--|
| 1 | V _{EER} | Receiver Ground |
| 2 | V _{CCR} | Receiver Power Supply (5V/3.3V) |
| 3 | SD | Receiver Signal Detect |
| 4 | RD- | Receiver Data Out (Inverted) |
| 5 | RD+ | Receiver Data Out |
| 6 | V _{CCT} | Transmitter Power Supply (5V/3.3V) |
| 7 | V _{EET} | Transmitter Ground |
| 8 | TDis | Input Logic Low Level to Switch Laser "ON" Input Logic High Level to Switch Laser "OFF" |
| 9 | TD+ | Transmitter Data in |
| 10 | TD- | Transmitter Data In (Inverted) |

Application Notes

Recommended AC Coupling Interface Circuit :

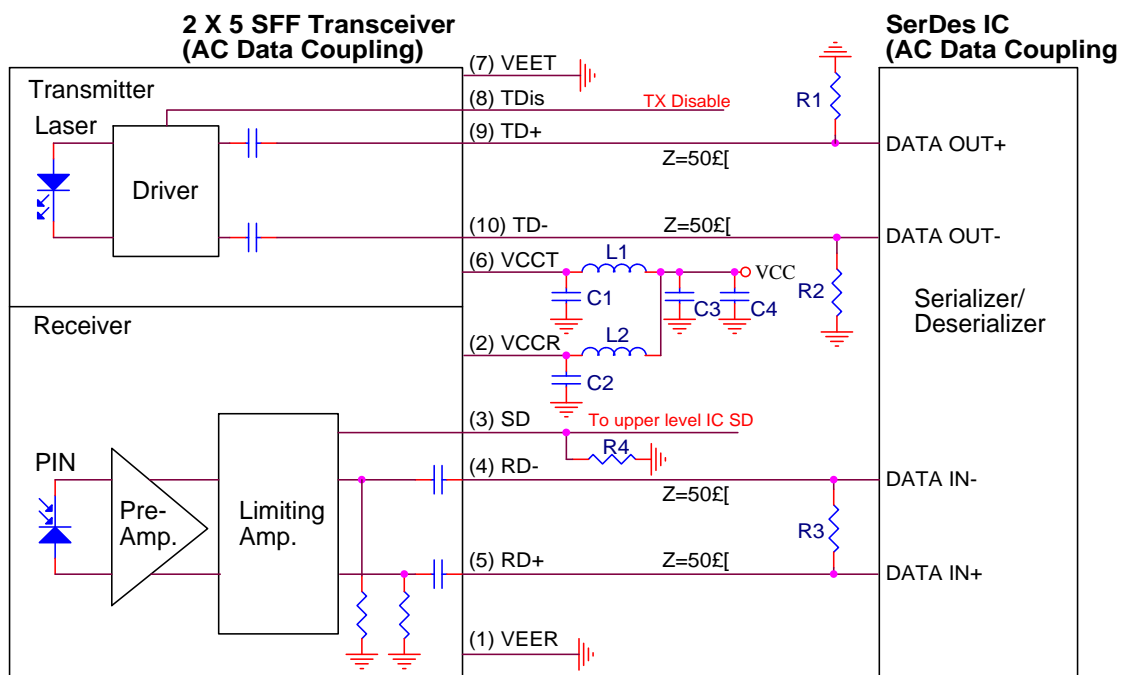


L1=L2=1£gH or ferrite bead
 C1=C2=C3=0.1£gF
 C4=10£gF
 R1, R2, R3 depends on SerDes IC specification.
 (Consult the SerDes IC application information)
 R4=510£[

NOTE;G
 1. Transmission line characteristic impedance Z=50£[.
 2. R1, R2, R3 as close to SerDes IC as possible.

1.25Gbps Burst Mode GEAPON ONU PX10 Small Form Factor BIDI Transceiver

Recommended DC Coupling Interface Circuit :

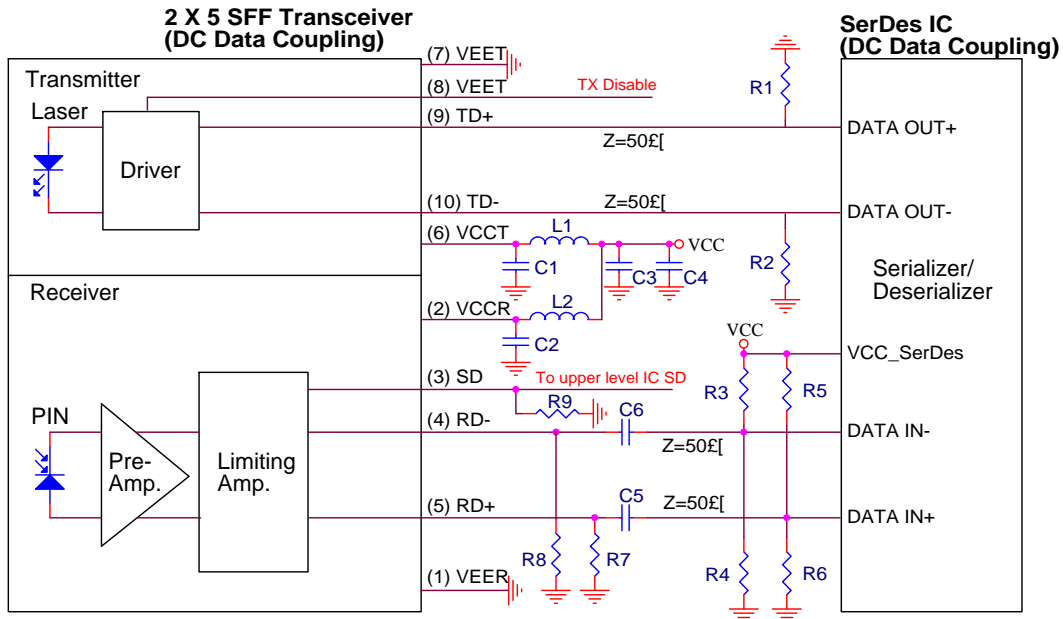

$L1=L2=1\text{f}gH$ or ferrite bead
 $C1=C2=C3=C5=C6=0.1\text{f}gF$
 $C4=10\text{f}gF$
 $R1, R2, R3, R4, R5, R6$ depends on SerDes IC specification.
 (Consult the SerDes IC application information)
 $R7=R8=270\text{f}g\Omega$ ($VCC=3.3V$)
 $=510\text{f}g\Omega$ ($VCC=5V$)
 $R9=510\text{f}g\Omega$

NOTE:G
 1. Transmission line characteristic impedance $Z=50\text{f}g\Omega$.
 2. $R1, R2, R3, R4, R5, R6$ as close to SerDes IC as possible
 3. $R7, R8$ as close to 1X9 Transceiver as possible.