



Project No. 17: Sylvester Road to West Side Reservoir

Estimated Project Cost: \$1,395,625

Project Priority: High

Project Description

A total of 5,500ft of 10-in diameter waterline will be installed along Sylvester Drive, beginning at WyEast Road and ending at the new West Side Reservoir. 4,500ft of 10-in waterline will replace existing 1-in, 2-in, and 4-in waterline, and 1,000ft of new 10-in waterline will connect the upsized pipe to the new West Side Reservoir. The waterline will serve as a portion of the primary supply line to the new West Side Reservoir. A new PRV station will be installed along the new waterline, just upstream of the new reservoir.

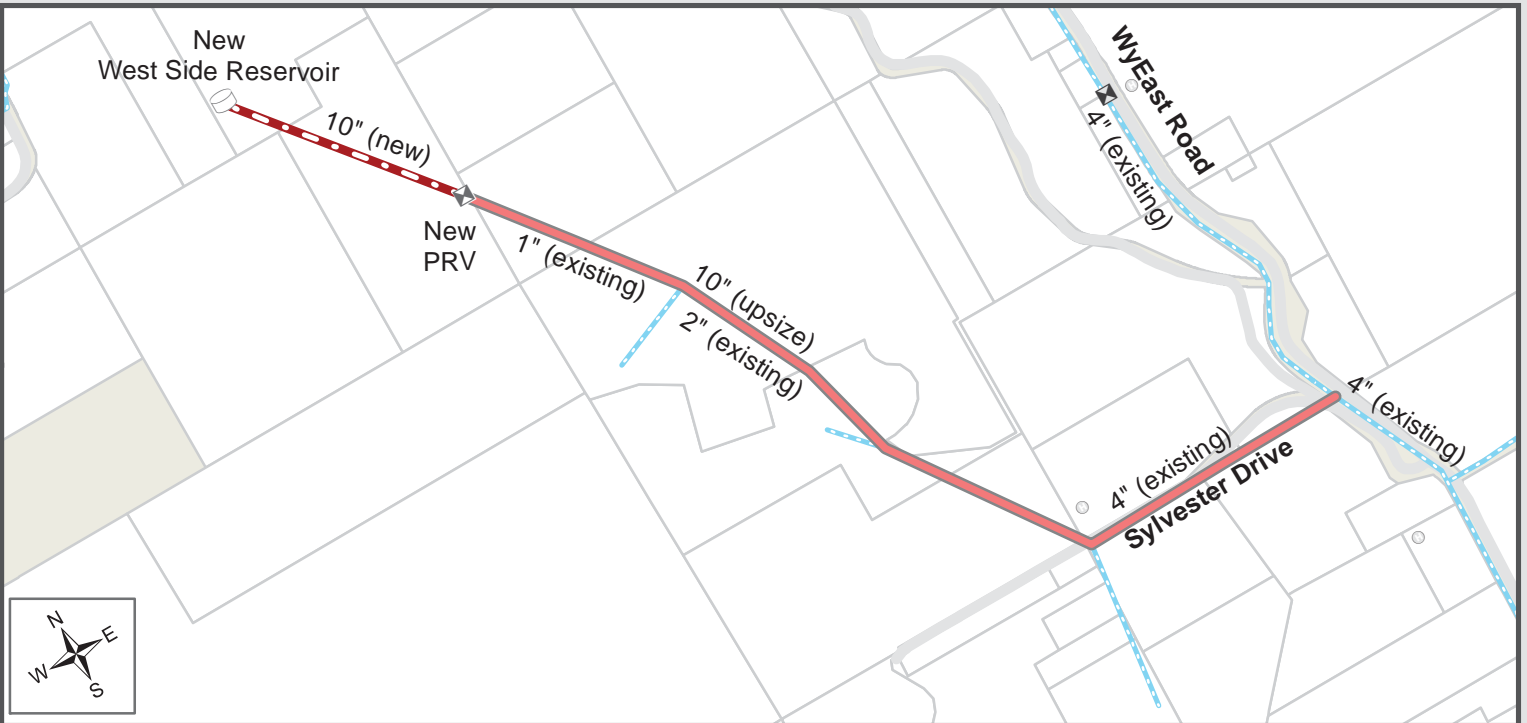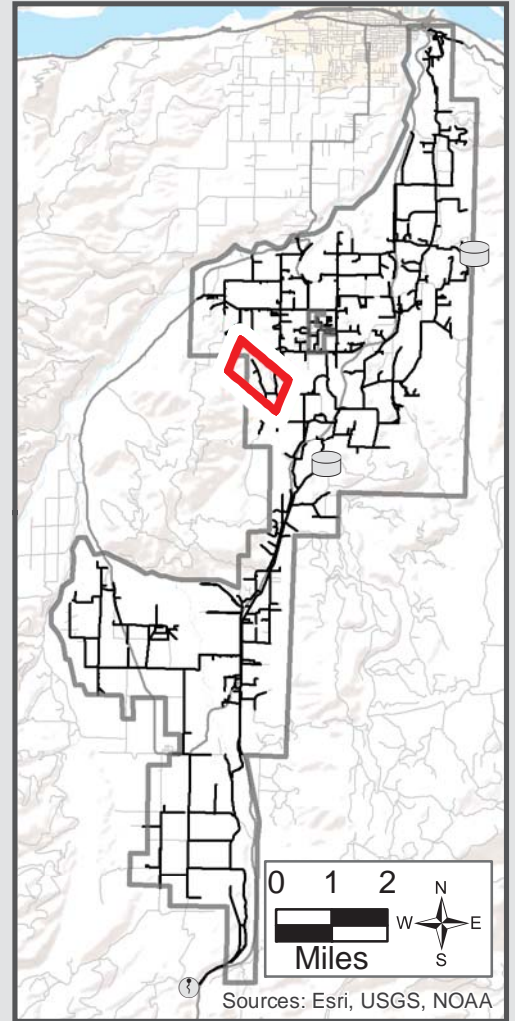

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir			
PRV Existing			

