


## Multimode 155Mbps 1300nm Optical Transceiver

### Features

- 1300nm LED Transmitter / InGaAs PIN receiver
- Industrial standard 1x9 pin footprint
- Duplex SC/ST/FC single mode connector interface
- Receiver signal detect function
- PECL/LVPECL logic interface, DC or AC coupling
- Single supply 5V/3.3V
- RoHS available

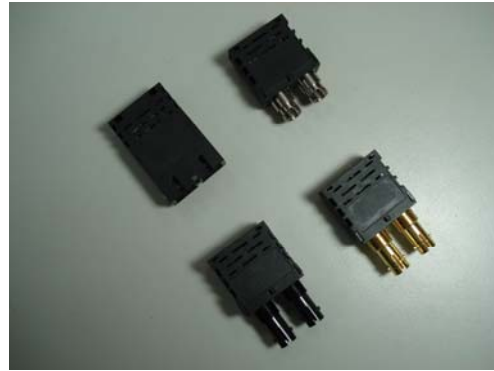

### Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit
<b>Transmitter</b>						
Data Rate (NRZ)		B	10	155	250	Mb/s
Optical Output Power (avg.) <sup>(1) (2) (4)</sup>		P <sub>o</sub>	-19	-16	-	dBm
Optical Wavelength (25°C)		λ <sub>c</sub>	1280	-	1340	nm
Spectral Width (25°C)		Δλ	-	-	170	nm
Extinction Ratio		ER	10	-	-	dB
Output Rise Time (10-90%)		t <sub>r</sub>	-	1.5	2.5	ns
Output Fall Time (10-90%)		t <sub>f</sub>	-	1.8	2.5	ns
Data Input <sup>(5)</sup>	DC Coupled	V <sub>IL</sub> V <sub>IH</sub>	V <sub>CC</sub> -1.810 V <sub>CC</sub> -1.165	- -	V <sub>CC</sub> -1.475 V <sub>CC</sub> -0.880	V V
	AC Coupled (Differential)	V <sub>I</sub>	0.3	-	1.6	V
Supply Voltage		V <sub>CC</sub>	3.10 4.75	3.3 5.0	3.50 5.25	V
Supply Current		I <sub>CC</sub>	-	-	110	mA
<b>Receiver</b>						
Data Rate (NRZ)		B	10	155	250	Mb/s
Optical Input (avg.) Sensitivity <sup>(1) (4)</sup>		P <sub>IN</sub>	-	-35	-32	dBm
Optical Wavelength		λ	1100	1300	1600	nm
Output Rise Time (10-90%)		t <sub>r</sub>	-	1.3	2.5	ns
Output Fall Time (10-90%)		t <sub>f</sub>	-	1.6	2.5	ns
Data Output <sup>(5)</sup>	DC Coupled	V <sub>OL</sub> V <sub>OH</sub>	V <sub>CC</sub> -1.840 V <sub>CC</sub> -1.045	- -	V <sub>CC</sub> -1.62 V <sub>CC</sub> -0.88	V V
	AC Coupled (Differential)	V <sub>I</sub>	0.6	-	1.8	V
Signal Detect Asserted (avg.)		P <sub>A</sub>	-	-	-32	dBm
Signal Detect Deasserted (avg.)		P <sub>D</sub>	-45	-	-	dBm
Hysteresis		P <sub>HYS</sub>	-	3	-	dB
Supply Voltage		V <sub>CC</sub>	3.10 4.75	3.3 5.0	3.50 5.25	V
Supply Current		I <sub>CC</sub>	-	-	100	mA

Notes :

- (1) With 0.275 NA, 62.5/125μm fiber.
- (2) Driven with a differential signal.
- (3) Eye mask diagram is compliant to ITU-T G.957 Eye Diagram.
- (4) 2<sup>23</sup> -1 PRBS, BER= 10<sup>-10</sup>.
- (5) Compatible with LVPECL and PECL logic levels.



# Multimode 155Mbps 1300nm Optical Transceiver

(6) The transmitter output should not be viewed directly.

## Absolute Maximum Ratings

Parameter		Min.	Max.	Unit
Operating Temperature	-1	0	70	°C
	-2	-40	85	°C
Storage Temperature		-40	100	°C
Lead Soldering Limits		-	240/10	°C /sec
Supply Voltage	5V	-0.2	7	V
	3.3V	-0.2	4	V

## Ordering Information

SNS-TR13MM1 - X S    9 R 1    -- G for RoHS

**Operating Temperature Range :**

1 : 0 ~ 70°C

2 : -40 ~ 85°C

**Data Coupling & SD Output Level :**

Symbol	Tx Coupling	Rx Coupling	SD
C	AC	DC	PECL
D	AC	DC	TTL
E	AC	AC	PECL
F	AC	AC	TTL
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

**Supply Voltage :**

5 : 5V

3 : 3.3V

**Connector Type :**

SC : SC Connector


FC : FC Connector

ST : ST Connector

# Multimode 155Mbps 1300nm Optical Transceiver

## Outline Drawing

UNIT : mm

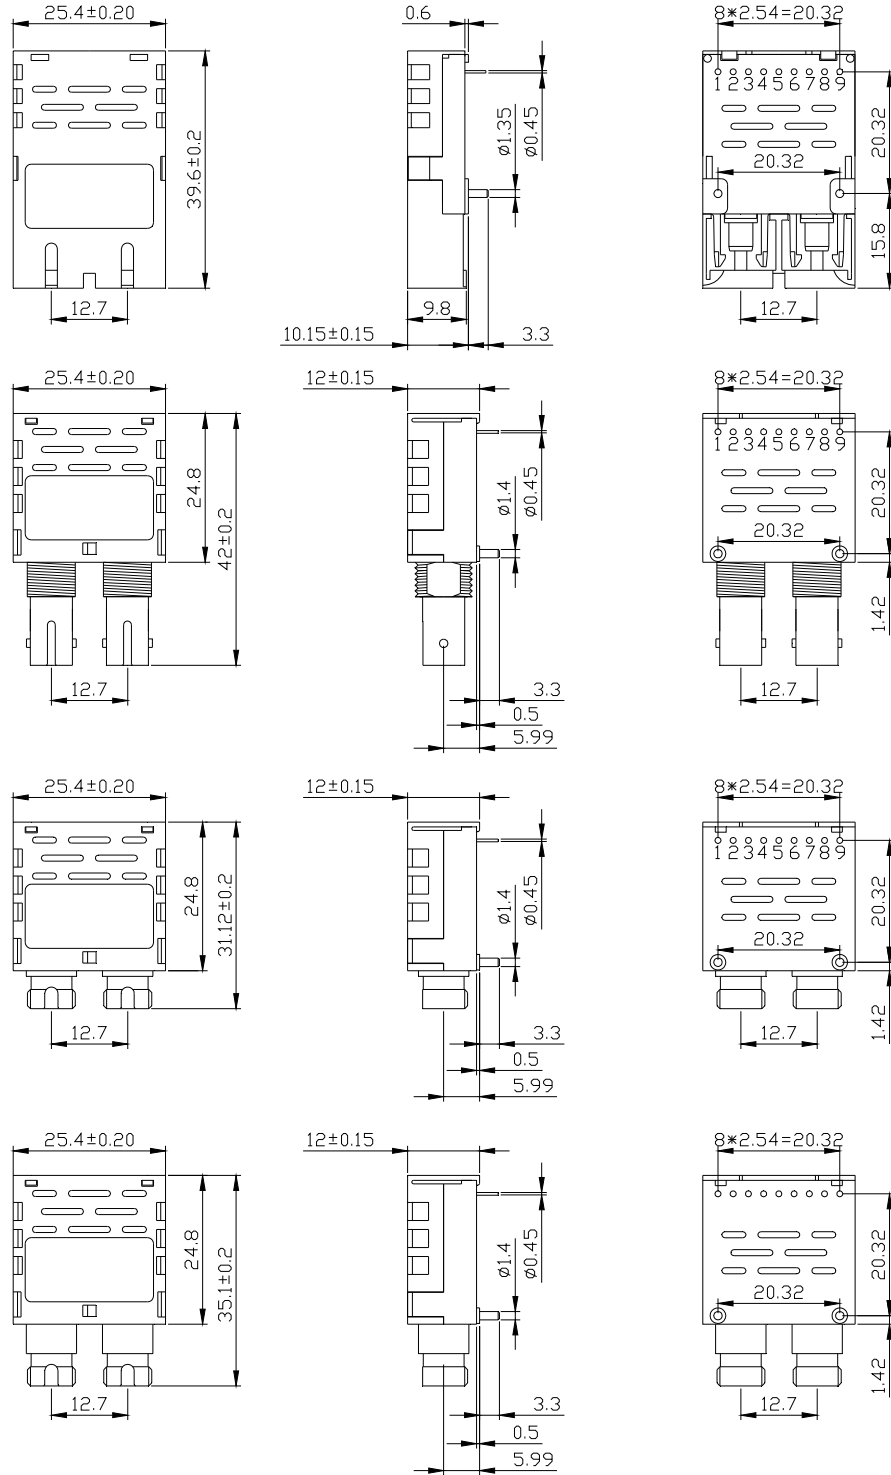


# Multimode 155Mbps 1300nm Optical Transceiver

## Pinout Description

Pin No.	Symbol	Description
1	V <sub>EER</sub>	Receiver Ground
2	RD+	Receiver Data Out
3	RD-	Receiver Data Out (Inverted)
4	SD	Receiver Signal Detect
5	V <sub>CCR</sub>	Receiver Power Supply (5V/3.3V)
6	V <sub>CCT</sub>	Transmitter Power Supply (5V/3.3V)
7	TD-	Transmitter Data In (Inverted)
8	TD+	Transmitter Data in
9	V <sub>EET</sub>	Transmitter Ground

## Application Notes

Recommended AC Coupling Interface Circuit :

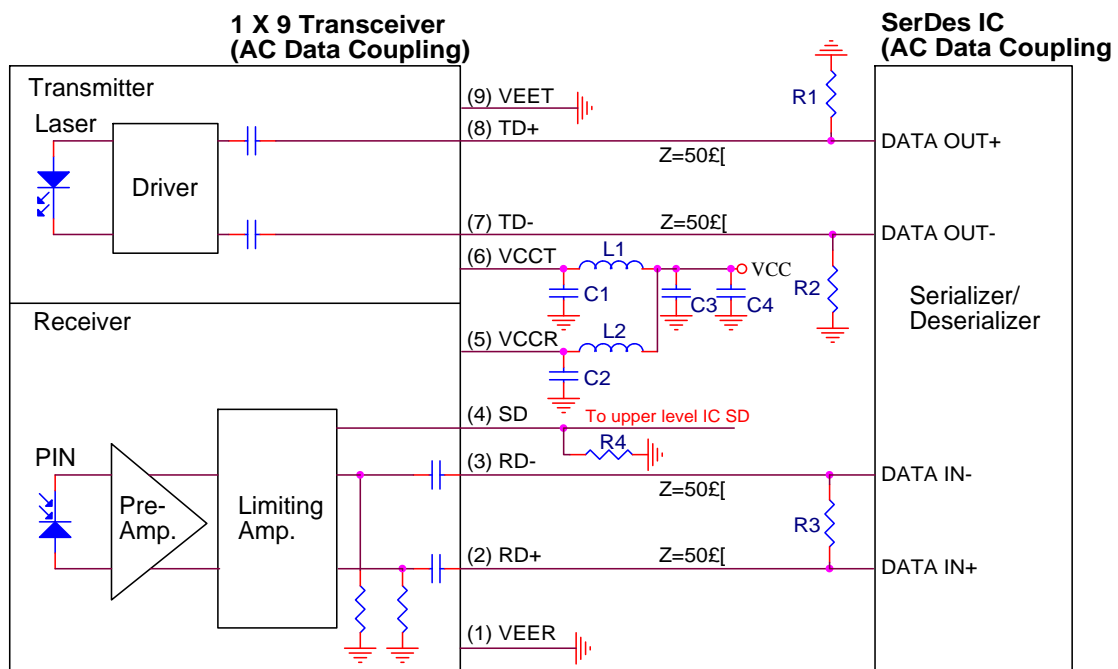


L1=L2=1 $\mu$ H or ferrite bead  
 C1=C2=C3=0.1 $\mu$ F  
 C4=10 $\mu$ F  
 R1, R2, R3 depends on SerDes IC specification.  
 (Consult the SerDes IC application information)  
 R4=510 $\Omega$

NOTE<sub>i</sub>G  
 1. Transmission line characteristic impedance Z=50 $\Omega$ .  
 2. R1, R2, R3 as close to SerDes IC as possible.

# Multimode 155Mbps 1300nm Optical Transceiver

Recommended DC Coupling Interface Circuit :

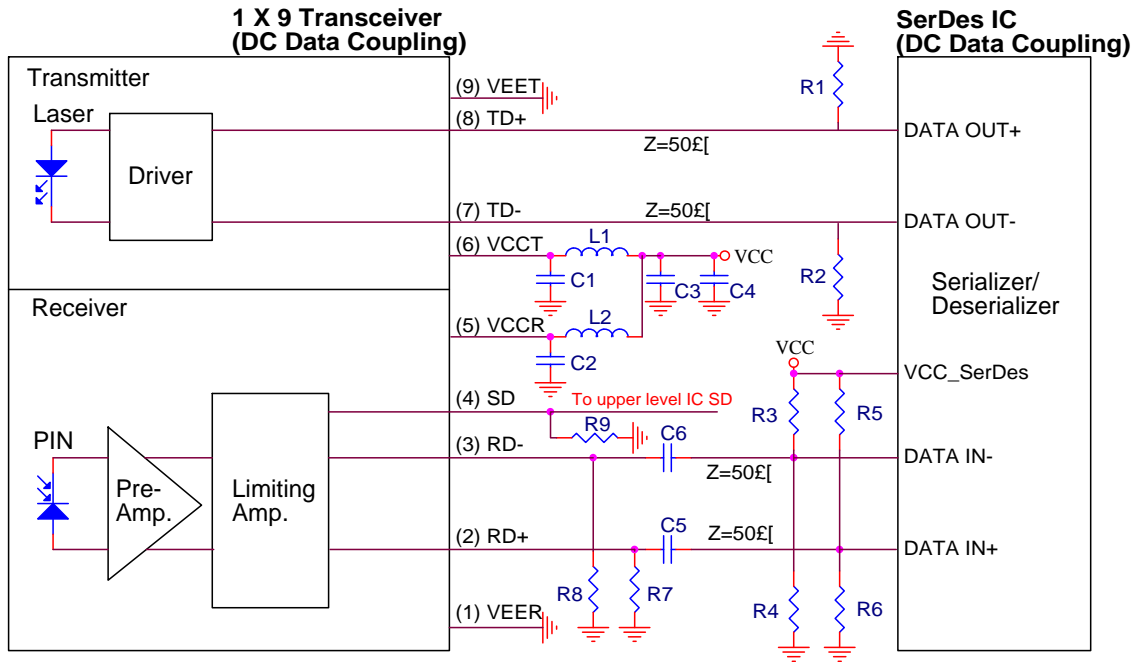

L1=L2=1 $\mu$ gH or ferrite bead  
 C1=C2=C3=C5=C6=0.1 $\mu$ gF

C4=10 $\mu$ gF

R1, R2, R3, R4, R5, R6 depends on SerDes IC specification.  
 (Consult the SerDes IC application information)

R7=R8=270 $\Omega$  (VCC=3.3V)

=510 $\Omega$  (VCC=5V)

R9=510 $\Omega$

NOTE:G

1. Transmission line characteristic impedance Z=50 $\Omega$ .

2. R1, R2, R3, R4, R5, R6 as close to SerDes IC as possible

3. R7, R8 as close to 1X9 Transceiver as possible.