



Project No. 3: Cooper Spur- London Drive Creek to Culbertson

Estimated Project Cost: \$1,566,000

Project Priority: Low

Project Description

A total of 6,000ft of 12-in diameter waterline will be installed along Cooper Spur Road, beginning south of London Drive and ending at Culbertson Drive, replacing existing 4-in and 6-in waterline. The upsized waterline will improve fire flows, redundancy, and distribution capacity in the south part of the District downstream from the new South Reservoir.

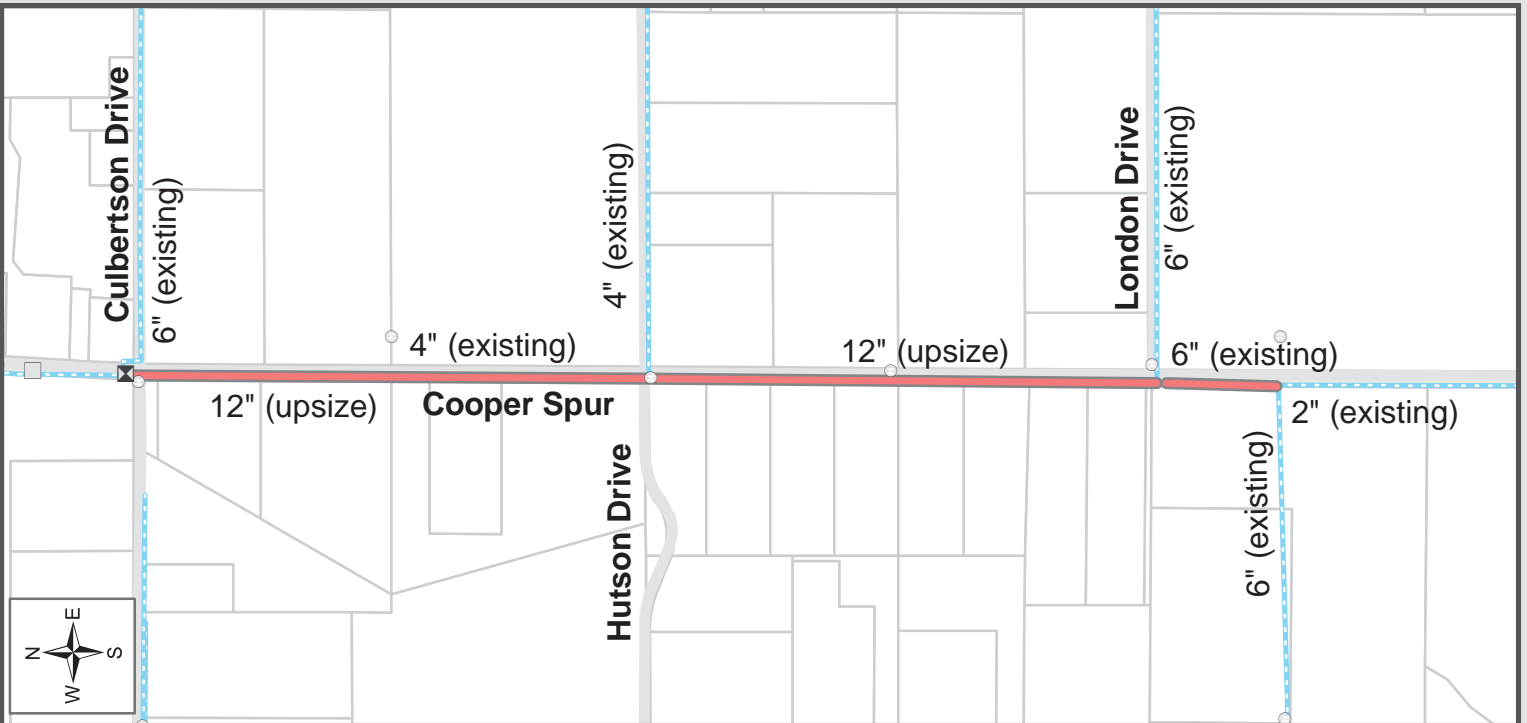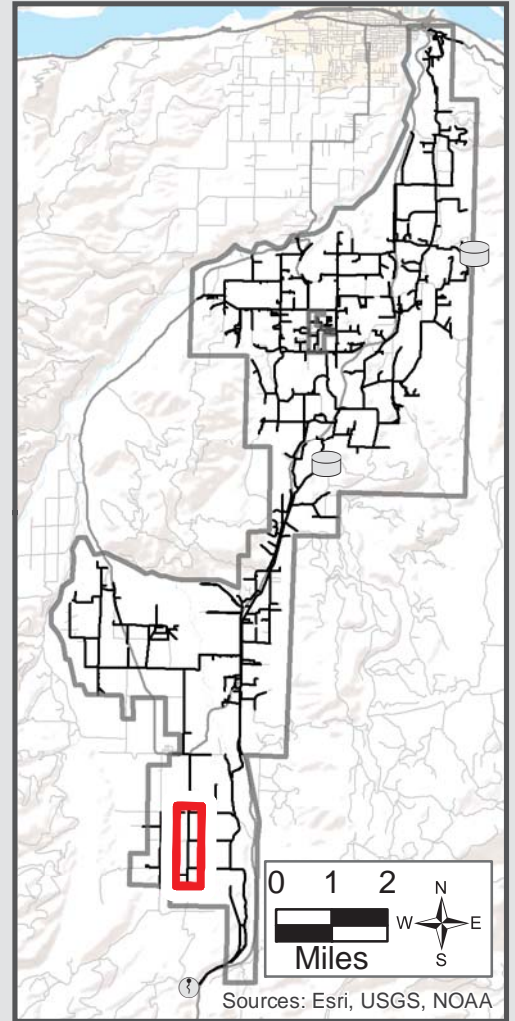

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir			
PRV Existing			

