



Project No. 5: Cooper Spur-Culbertson to Baseline

Estimated Project Cost: \$1,409,400

Project Priority: Low

Project Description

A total of 5,400ft of 12-in diameter waterline will be installed along Cooper Spur Road, beginning at Culbertson Drive and ending at Baseline Drive, replacing existing 4-in waterline. The upsized waterline will improve fire flows, redundancy, and distribution capacity in the south part of the District near Parkdale.

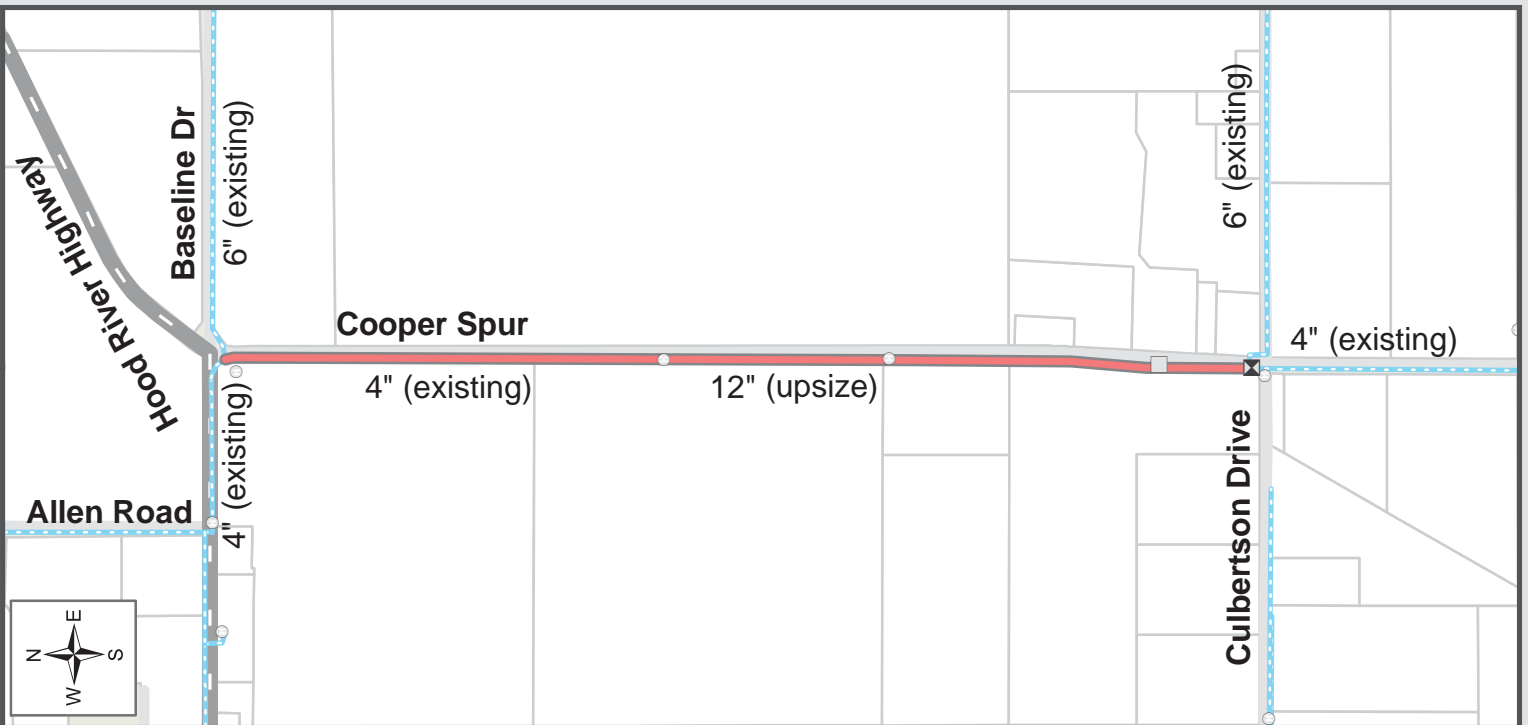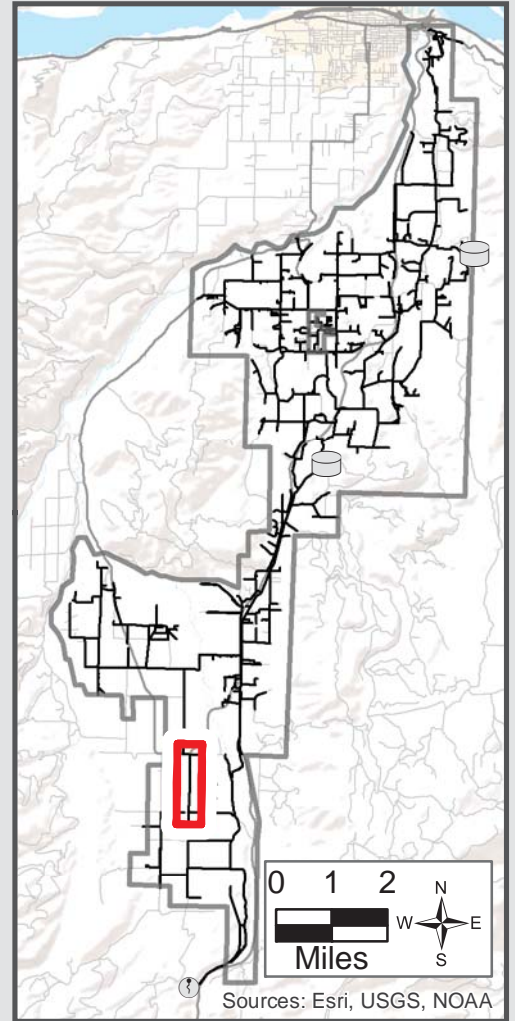

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Waterline	Water	
New Reservoir			
PRV Existing			

0 1,000 Feet

