



Project No. 18: West Side Reservoir

Estimated Project Cost: \$2,341,000

Project Priority: High

Project Description

A new 540,000 gallon West Side Reservoir will be constructed northwest of Sylvester Drive. A total of 5,200ft of 12-in diameter waterline will be installed along Lippman Road, beginning at WyEast Road and ending at the reservoir. 3,000ft of 12-in waterline will replace existing 1-in, 2-in, and 4-in waterline, and 2,200ft of new 12-in waterline will connect the upsized pipe to the reservoir. The reservoir will provide general and fire storage for Odell and the pressure zones north of Odell. Combined with the supply and distribution waterlines, the reservoir will also improve fire flow and redundancy in these same areas.

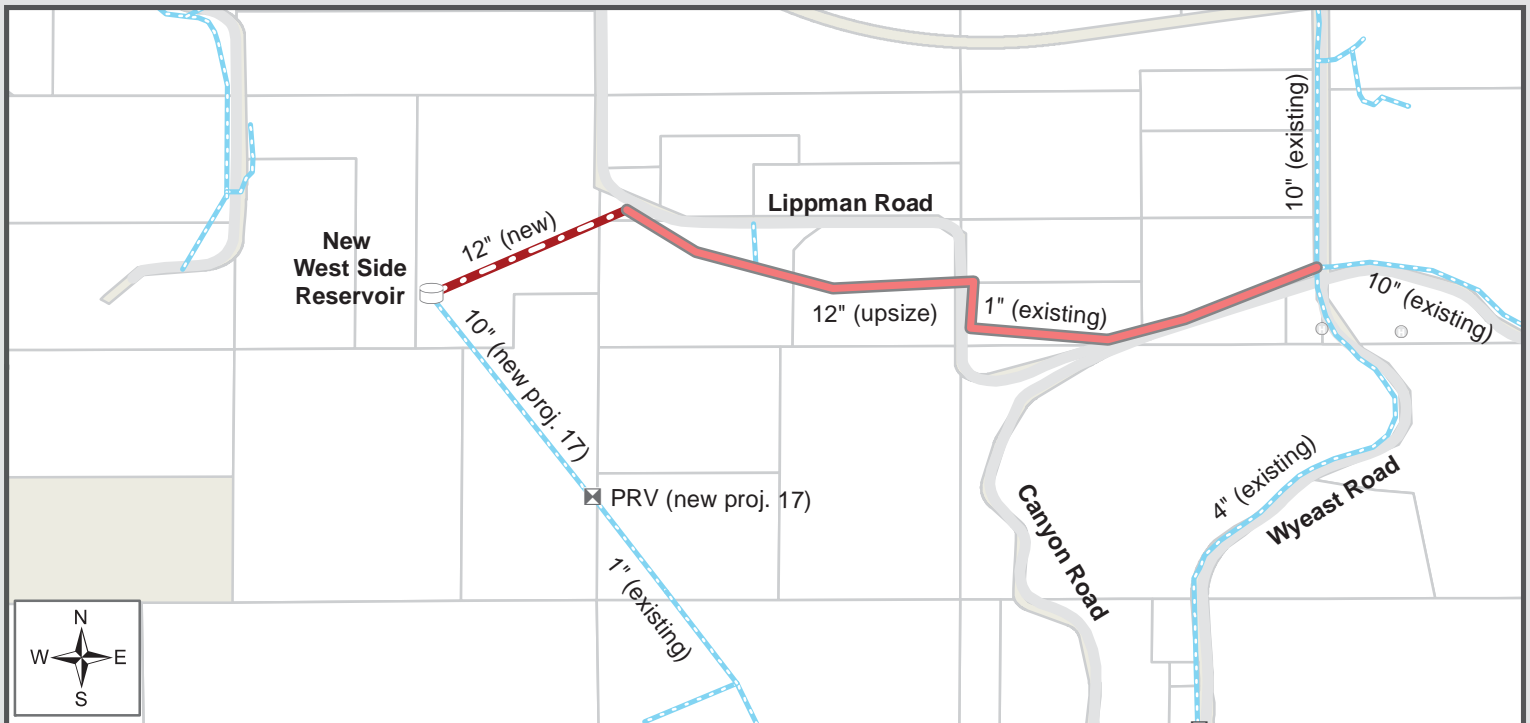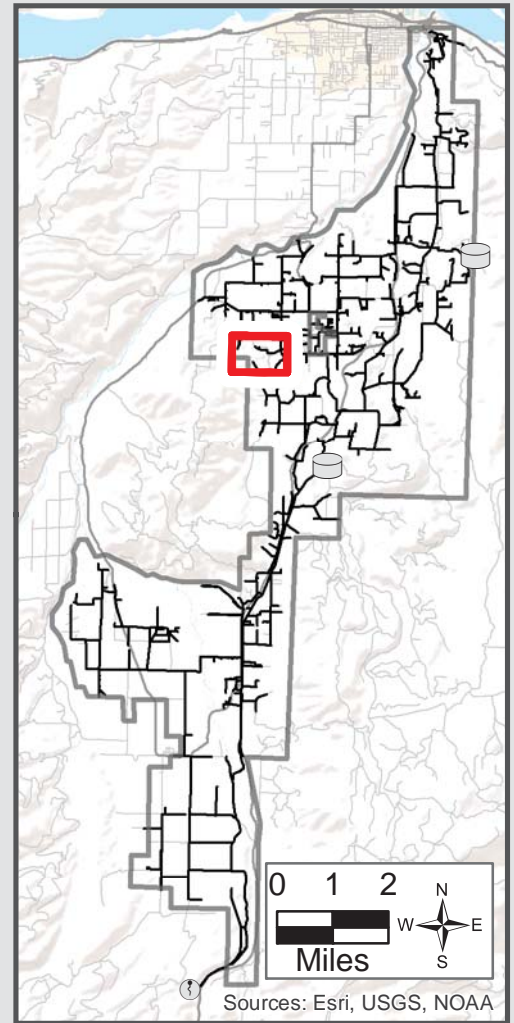

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	PRV Existing		

0 1,000 Feet



Date: 11/4/2015
Document Name: 2015CIP_CutSheets