



Project No. 22: Lingren Road - Davis to Ehrck Hill

Estimated Project Cost: \$870,000

Project Priority: Low

Project Description

A total of 4,000ft of 8-in diameter waterline will be installed along Lingren Road, beginning at Odell Highway and ending at Ehrck Hill Drive, replacing existing 6-in waterline. The upsized waterline will improve fire flows, redundancy, and distribution capacity in Odell and the parts of the District north of Odell.

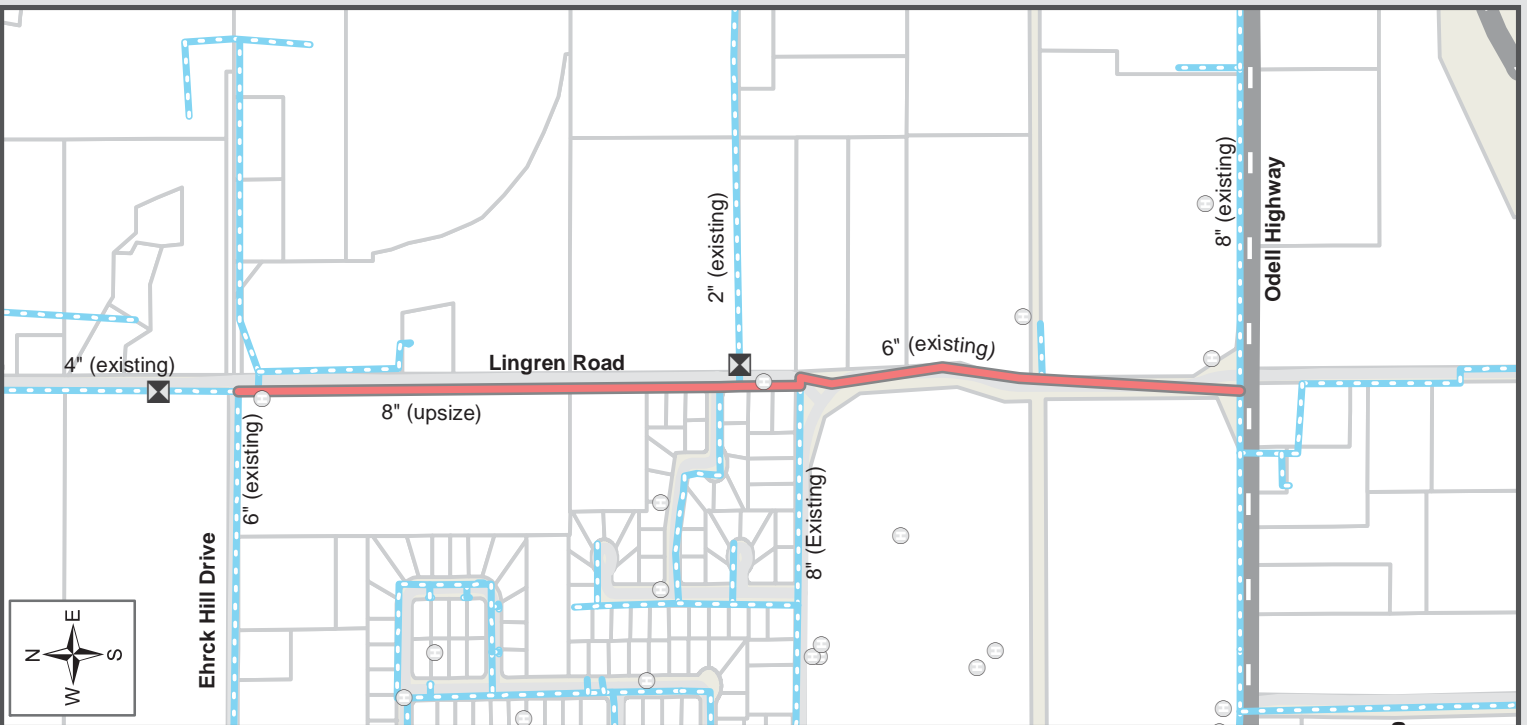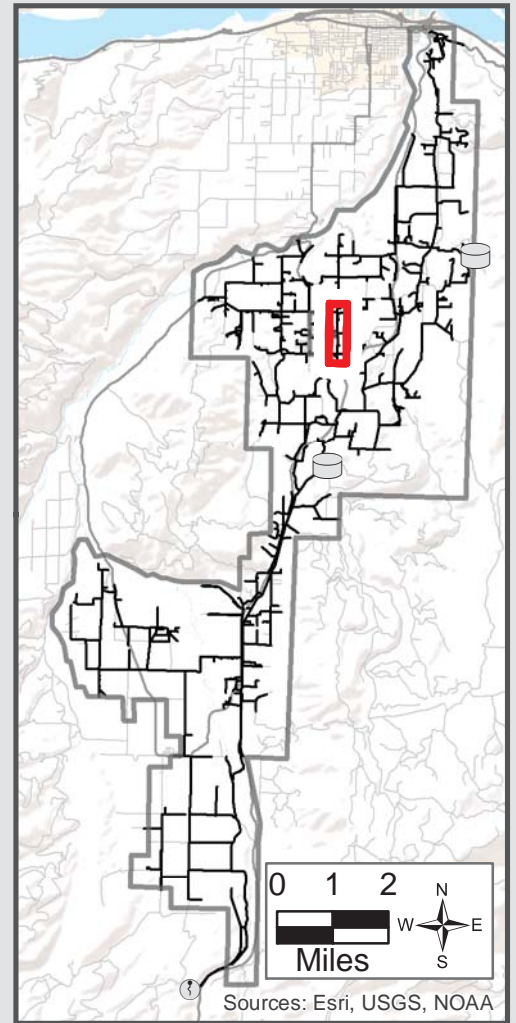

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Waterline	Property line
New PRV	Existing Reservoir	Water	
New Reservoir			
PRV Existing			

