



# Project No. 27: Pine Grove to Paasch Drive

**Estimated Project Cost: \$1,914,000**

**Project Priority: Low**

## Project Description

A total of 8,800ft of 8-in diameter waterline will be installed connecting Wells Drive near Pine Grove to Paasch Drive. 3,300ft of 8-in waterline will replace existing 3/4-in, 3-in, and 4-in waterlines along Mohr Drive and Paasch Drive, and 5,500ft of new 8-in waterline will connect Wells Drive to Mohr Drive and Mohr Drive to Paasch Drive. This waterline will improve fire flows and provide redundancy to the northern parts of the District.

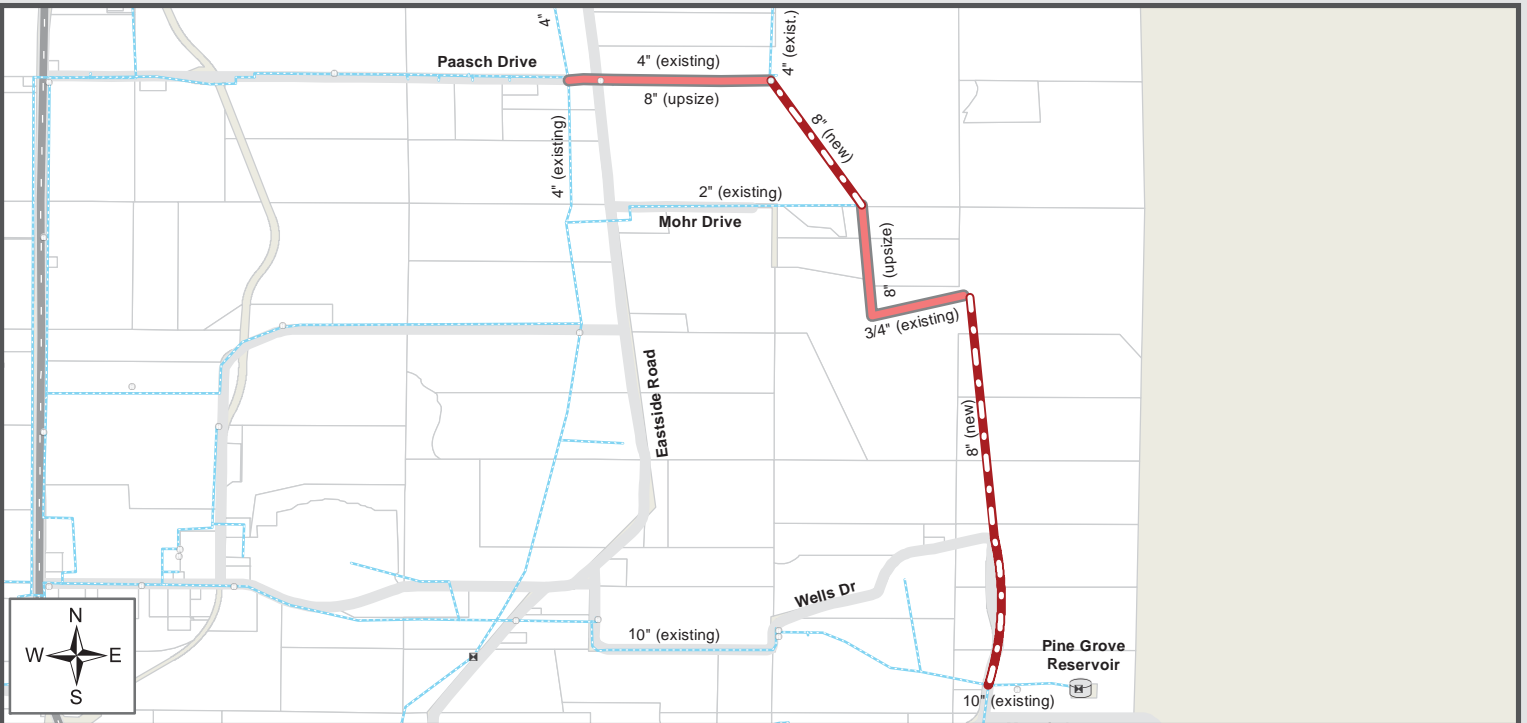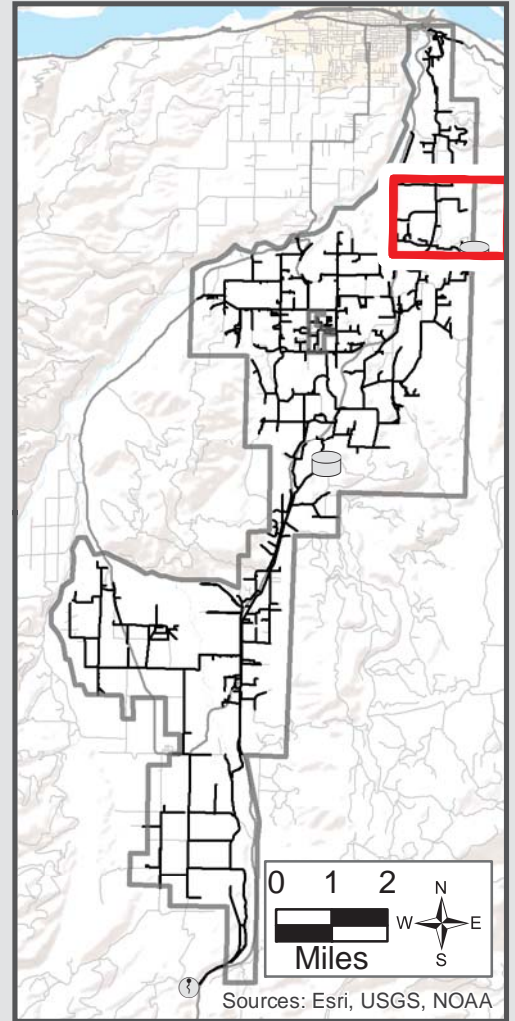

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	PRV Existing		

0 1,000 Feet

