



Project No. 28: East Side Road - North

Estimated Project Cost: \$2,436,000

Project Priority: Low

Project Description

A total of 11,200ft of 8-in diameter waterline will be installed along Eastside Road and Highline Drive, beginning at Old Dalles Road and ending near Old Columbia River Drive, replacing existing 6-in waterline. The upsized waterline will replace pipe at the end of its usable life and improve fire flows in the northern part of the District.

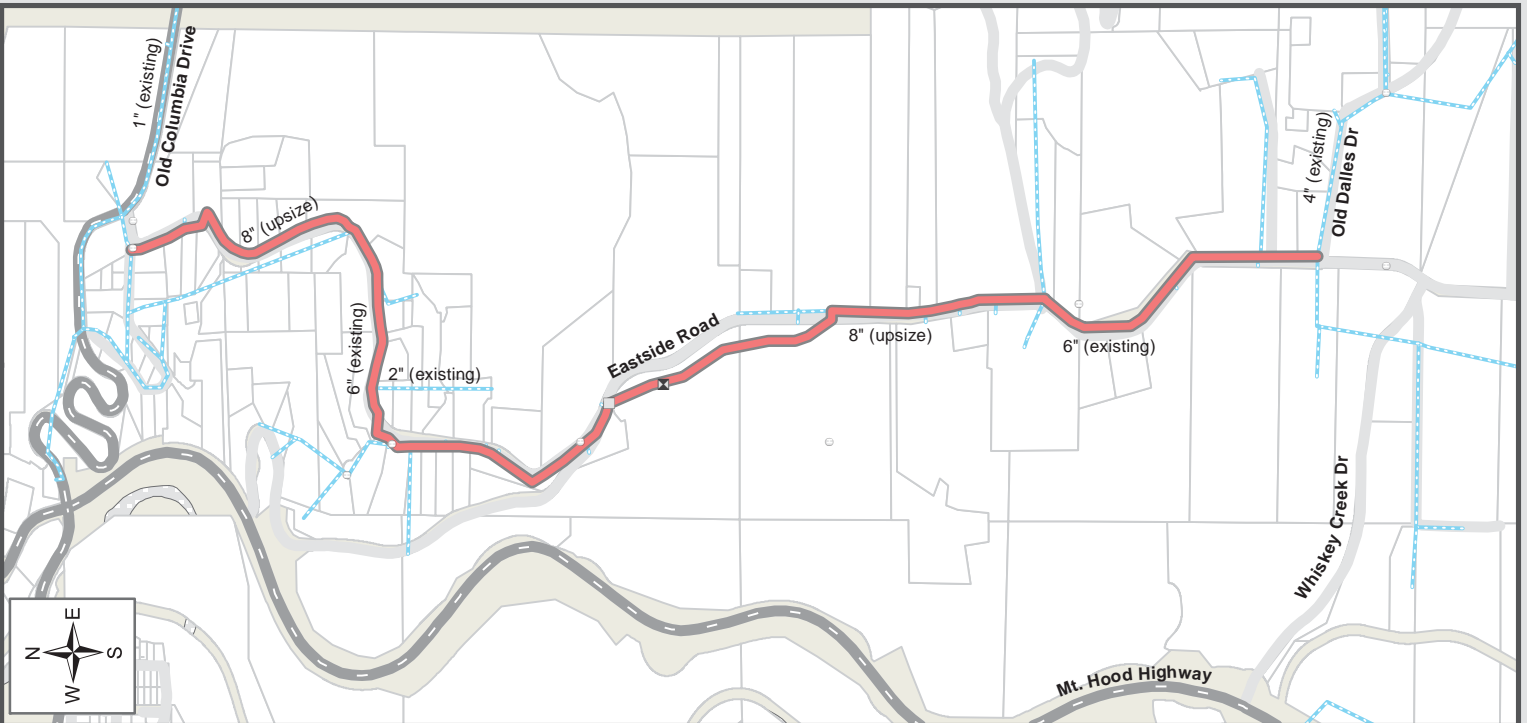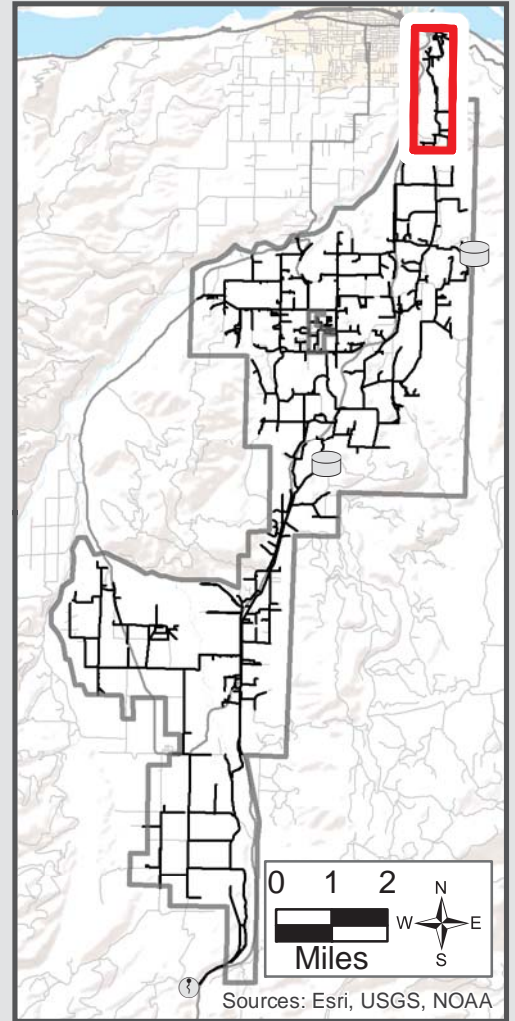

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	Existing Reservoir		
PRV Existing			

0 1,000 Feet

