


Project No. 29: Neal Creek – Hwy 35 to Thomsen

Estimated Project Cost: \$935,250

Project Priority: High

Project Description

A total of 4,300ft of 8-in diameter waterline will be installed along Neal Creek Road, beginning at Thomsen Road and ending at Highway 35. 2,300ft of 8-in waterline will replace existing 3-in waterline, and 2,000ft of new 8-in waterline will connect loop to Highway 35. This waterline will replace pipe at the end of its usable life and provide redundancy in Odell.

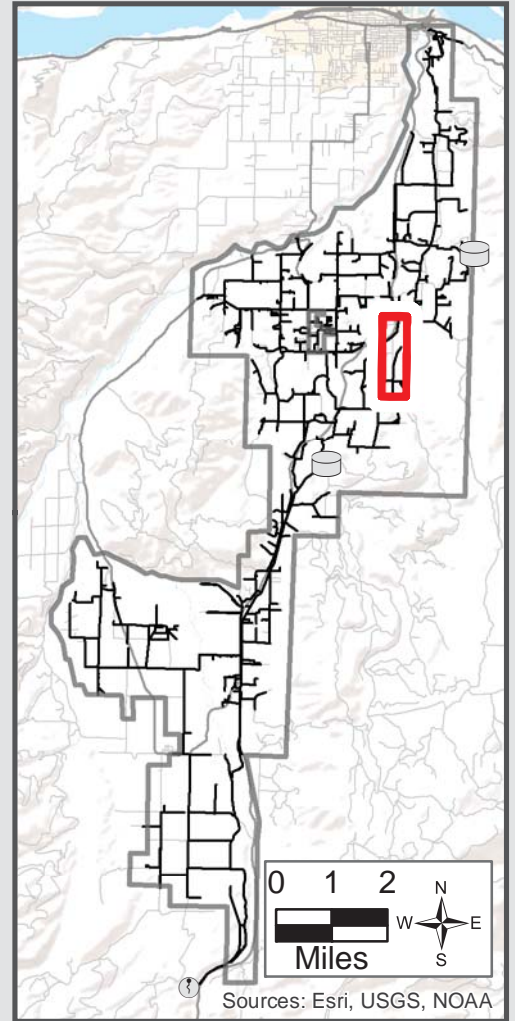

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir			
PRV Existing			

