


**2018**

Mat = C45


|        |        |
|--------|--------|
| 835 mm | 9,0 kg |
| 415 mm | 4,0 kg |

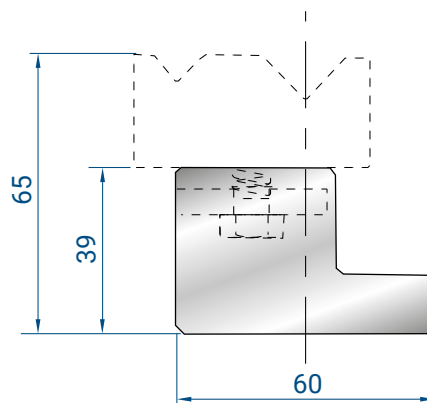

**2039**

Mat = C45


|        |         |
|--------|---------|
| 835 mm | 12,0 kg |
| 415 mm | 6,0 kg  |

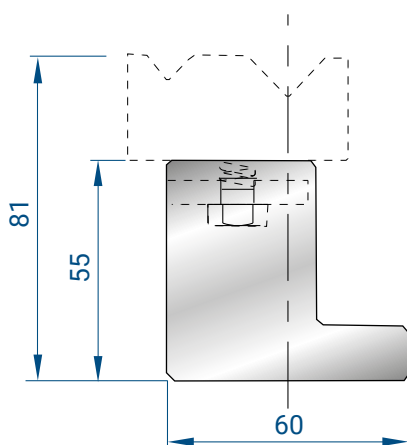

**2019**

Mat = C45


|        |         |
|--------|---------|
| 835 mm | 15,0 kg |
| 415 mm | 7,0 kg  |

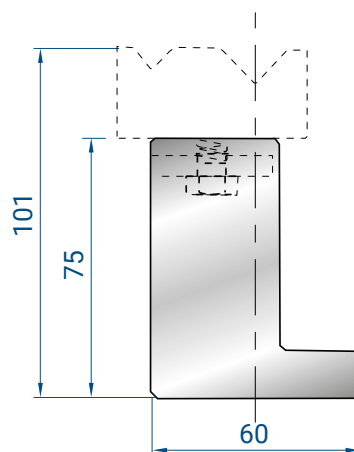

**2035**

Mat = C45

|        |         |
|--------|---------|
| 835 mm | 19,0 kg |
| 415 mm | 9,0 kg  |



**4277**

**MOLLA + RONDELLA + VITE**  
**SPRING + WASHER + SCREW**


# SUPPORTI PER MATRICI AUTOCENTRANTI DIE HOLDERS FOR SELF CENTERING DIES

## SUPPORTI PER MATRICI AUTOCENTRANTI DIE HOLDERS FOR SELF-CENTERING DIES

DEVE ESSERE INSTALLATO  
SUI SUPPORTI MODELLO:

MUST BE INSTALLED ON  
SUPPORT MODEL:


2018 - 2019 - 2035 - 2039

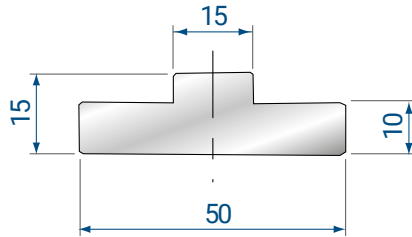

**2058**

Mat = C45

|        |        |
|--------|--------|
| 835 mm | 4,0 kg |
| 415 mm | 2,0 kg |




**2059**

Mat = C45

|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

## FERMO PER MATRICI AUTOCENTRANTI FIXED BAR FOR SELF-CENTERING DIES

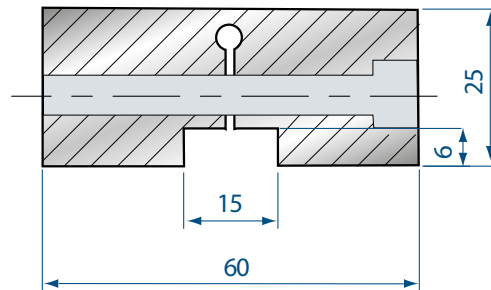



**2060**

Mat = C45

|       |        |
|-------|--------|
| 15 mm | 0,2 kg |
|-------|--------|

## ESEMPIO DI MONTAGGIO ASSEMBLY EXAMPLE

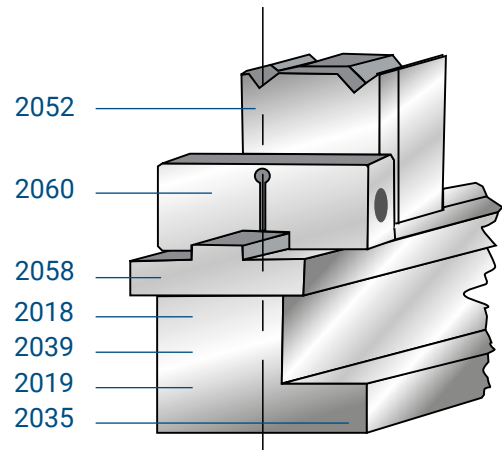


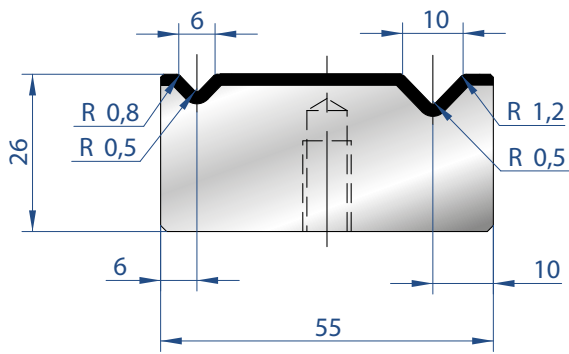

**2046**

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


|        |        |
|--------|--------|
| 835 mm | 9,0 kg |
| 415 mm | 4,0 kg |

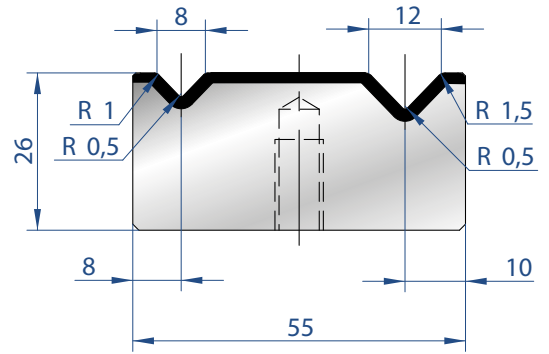

**2041**

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


|        |        |
|--------|--------|
| 835 mm | 9,0 kg |
| 415 mm | 4,0 kg |

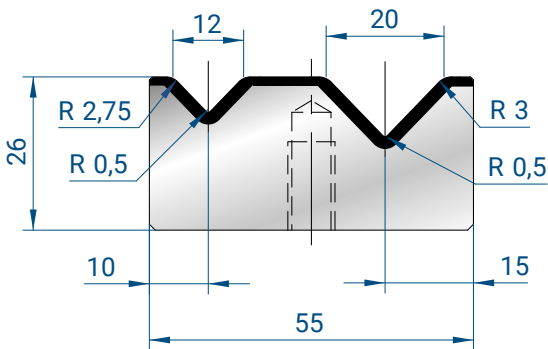

**2013**

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


|        |        |
|--------|--------|
| 835 mm | 9,0 kg |
| 415 mm | 4,0 kg |

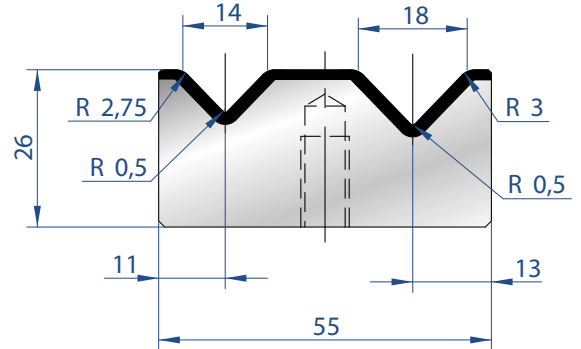

**2032**

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


|        |        |
|--------|--------|
| 835 mm | 9,0 kg |
| 415 mm | 4,0 kg |

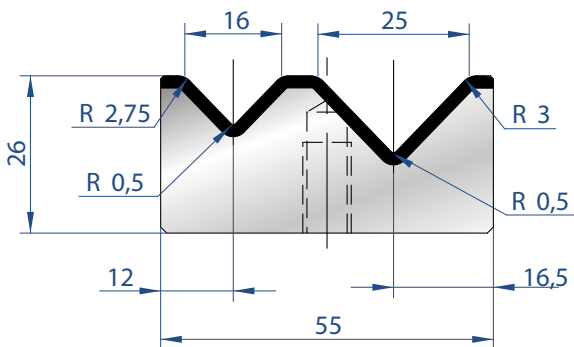

**2014**

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

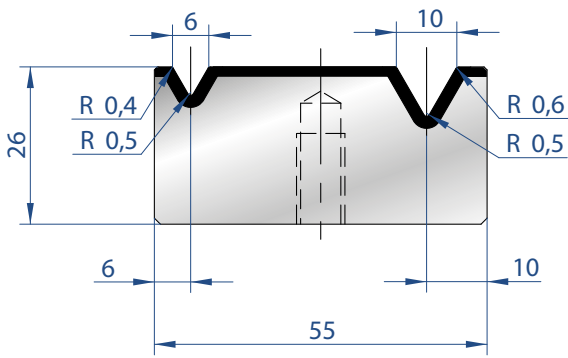

**2015**

Mat = C45  
Max T/m = 60  
 $\alpha = 60^\circ$


|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

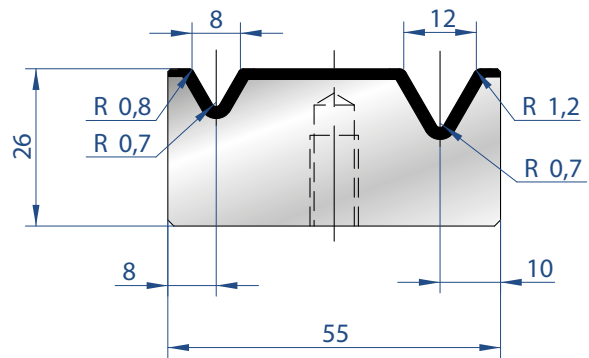

**2016**

Mat = C45  
Max T/m = 60  
 $\alpha = 60^\circ$


|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

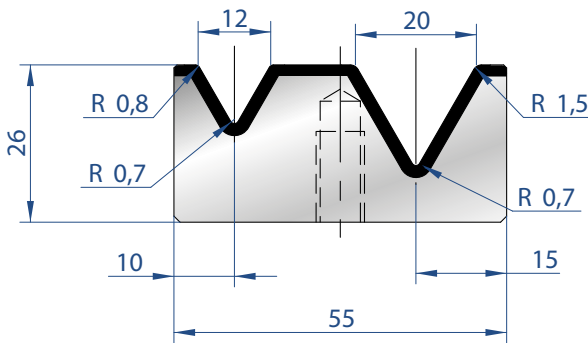

**2033**

Mat = C45  
Max T/m = 60  
 $\alpha = 60^\circ$


|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

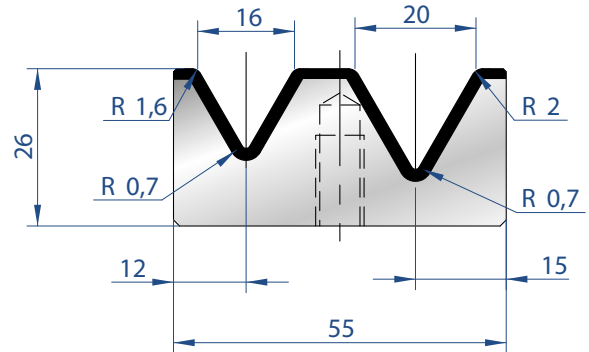

**2017**

Mat = C45  
Max T/m = 60  
 $\alpha = 60^\circ$


|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

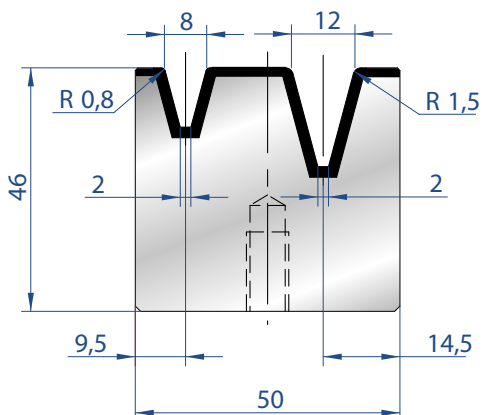

**2047**

Mat = C45  
Max T/m = 40  
 $\alpha = 30^\circ$


|        |        |
|--------|--------|
| 835 mm | 8,0 kg |
| 415 mm | 4,0 kg |

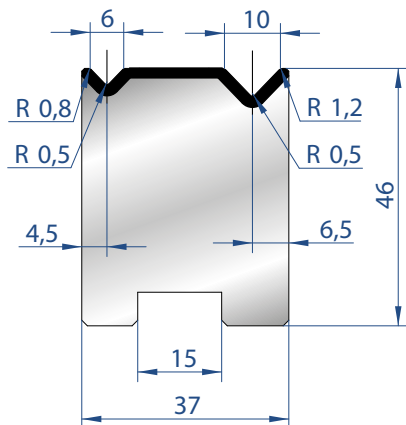

### 2050

Mat = C45  
Max T/m = 80  
 $\alpha = 88^\circ$


|                         |         |
|-------------------------|---------|
| 835 mm                  | 10,0 kg |
| 415 mm                  | 5,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 10,0 kg |

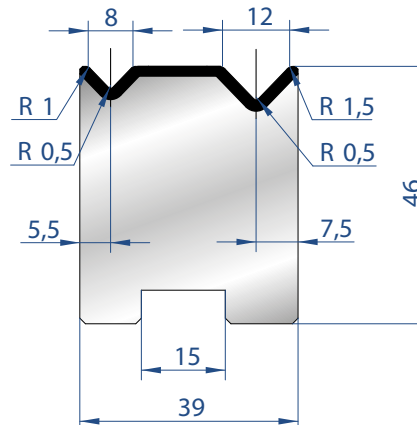

### 2052

Mat = C45  
Max T/m = 80  
 $\alpha = 88^\circ$


|                         |         |
|-------------------------|---------|
| 835 mm                  | 10,0 kg |
| 415 mm                  | 5,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 10,0 kg |

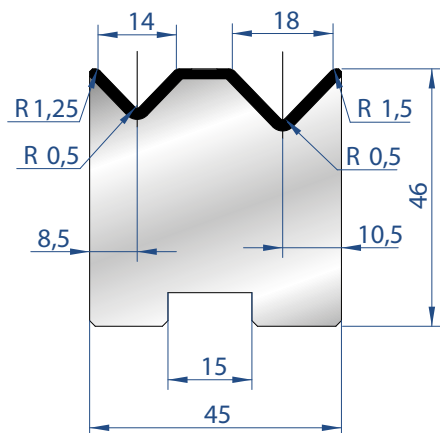

### 2053

Mat = C45  
Max T/m = 80  
 $\alpha = 88^\circ$


|                         |         |
|-------------------------|---------|
| 835 mm                  | 12,0 kg |
| 415 mm                  | 6,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 12,0 kg |

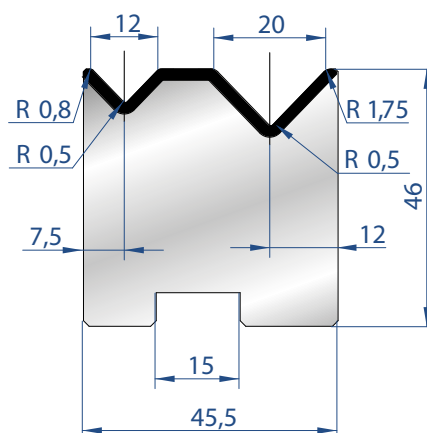

### 2054

Mat = C45  
Max T/m = 80  
 $\alpha = 88^\circ$


|                         |         |
|-------------------------|---------|
| 835 mm                  | 12,0 kg |
| 415 mm                  | 6,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 12,0 kg |

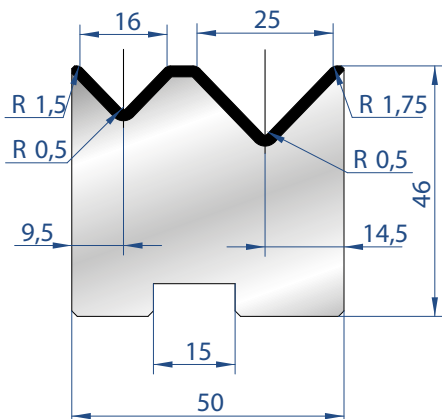

### 2055

Mat = C45  
Max T/m = 80  
 $\alpha = 88^\circ$


|                         |         |
|-------------------------|---------|
| 835 mm                  | 13,0 kg |
| 415 mm                  | 6,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 13,0 kg |

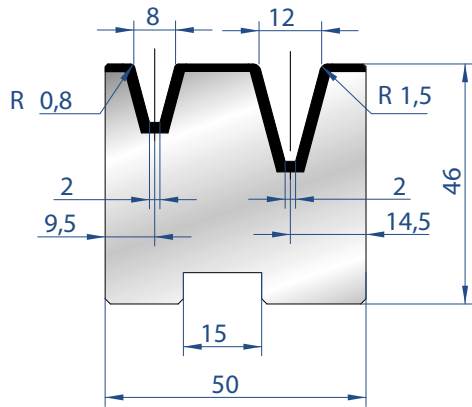

**2056**

Mat = C45  
Max T/m = 40  
 $\alpha = 30^\circ$

|                         |         |
|-------------------------|---------|
| 835 mm                  | 13,0 kg |
| 415 mm                  | 6,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 13,0 kg |

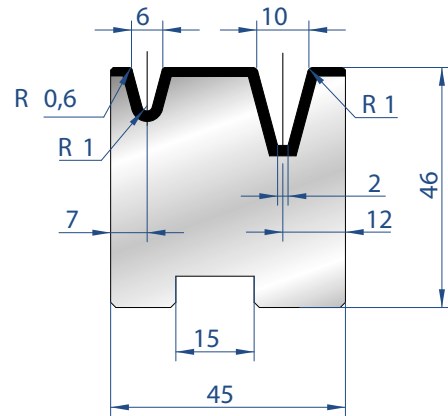


**2057**

Mat = C45  
Max T/m = 40  
 $\alpha = 30^\circ$

|                         |         |
|-------------------------|---------|
| 835 mm                  | 13,0 kg |
| 415 mm                  | 6,0 kg  |
| 805 mm<br>FRAZ. / SECT. | 13,0 kg |

MATRICI 3U / 3U DIES

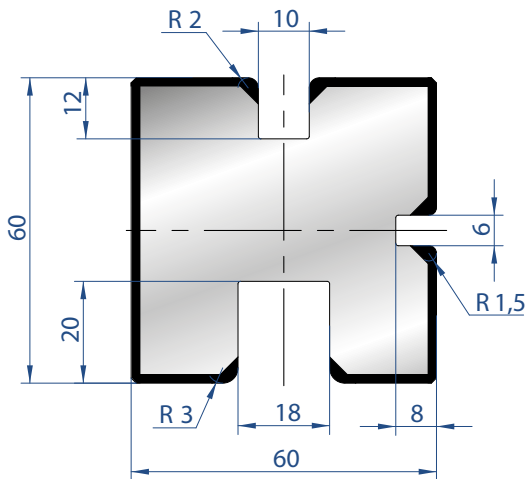

**2031**

Mat = C45  
Max T/m = 100

|                         |         |
|-------------------------|---------|
| 835 mm                  | 20,0 kg |
| 415 mm                  | 10,0 kg |
| 805 mm<br>FRAZ. / SECT. | 20,0 kg |

