


1177

Mat = C45
 H = 65.50
 Max T/m = 100
 $\alpha = 85^\circ$
 R = 3


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

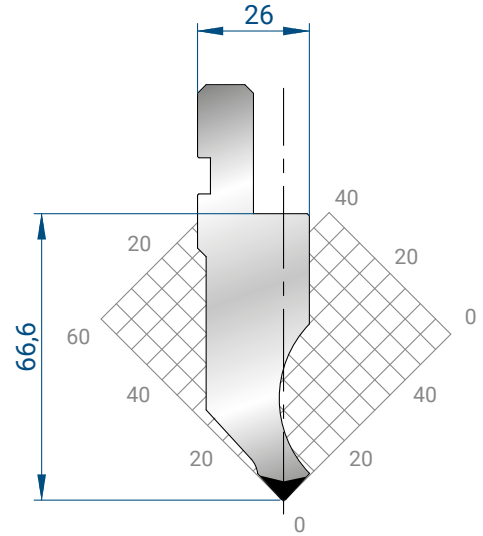

1260

Mat = C45
 H = 66.60
 Max T/m = 100
 $\alpha = 85^\circ$
 R = 0.8


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

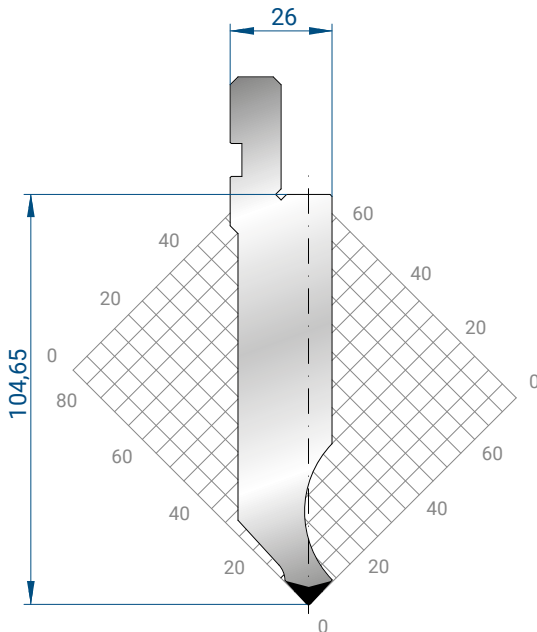

1281

Mat = C45
 H = 104.65
 Max T/m = 100
 $\alpha = 85^\circ$
 R = 0.8


835 mm	17,0 kg
415 mm	9,0 kg
805 mm	17,0 kg
FRAZ. / SECT.	

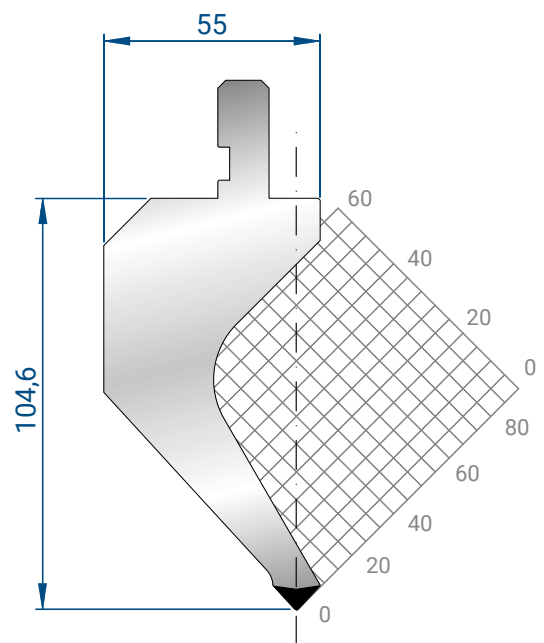

1172

Mat = C45
 H = 104.60
 Max T/m = 50
 $\alpha = 85^\circ$
 R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

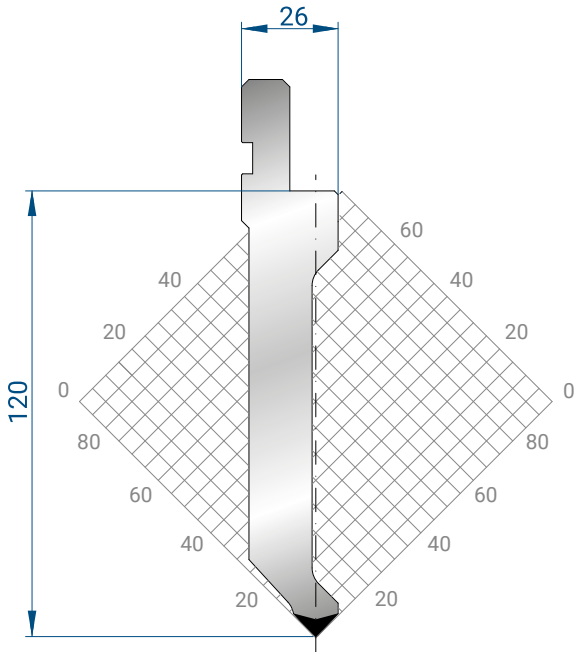

1309

Mat = C45
H = 120.00
Max T/m = 70
 α = 85°
R = 0.8


835 mm	15,9 kg
415 mm	8,0 kg
805 mm	15,9 kg
FRAZ. / SECT.	

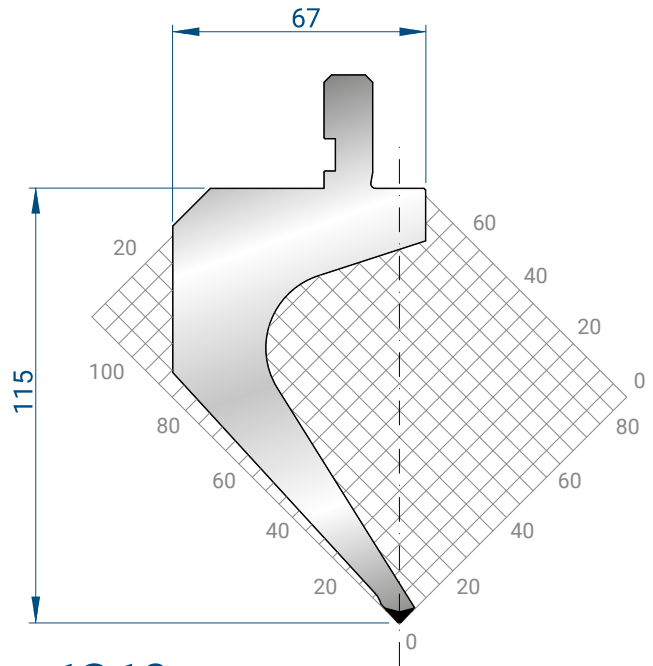

1310

Mat = 42CrMo4
 bonificato / *tempered*
H = 115.00
Max T/m = 35
 α = 85°
R = 0.8


835 mm	23,0 kg
415 mm	11,5 kg
805 mm	23,0 kg
FRAZ. / SECT.	

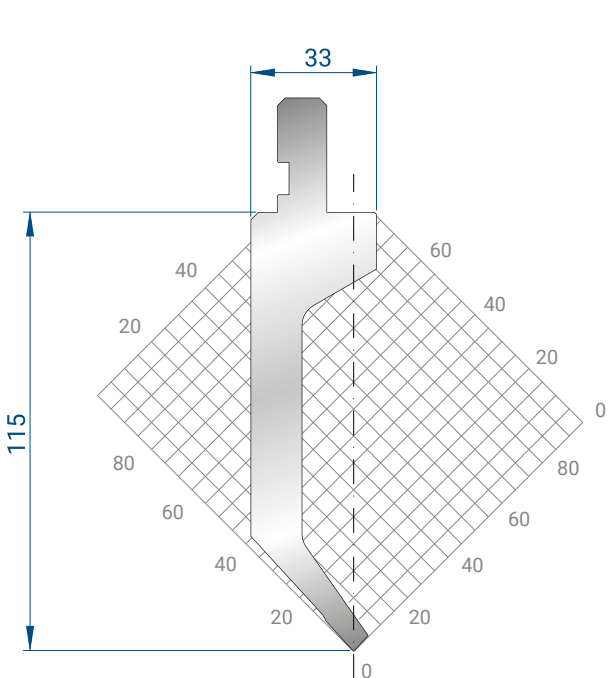

1312

Mat = 42CrMo4
 bonificato / *tempered*
H = 115.00
Max T/m = 20
 α = 85°
R = 0.6

835 mm	14,5 kg
415 mm	7,2 kg
805 mm	14,5 kg
FRAZ. / SECT.	

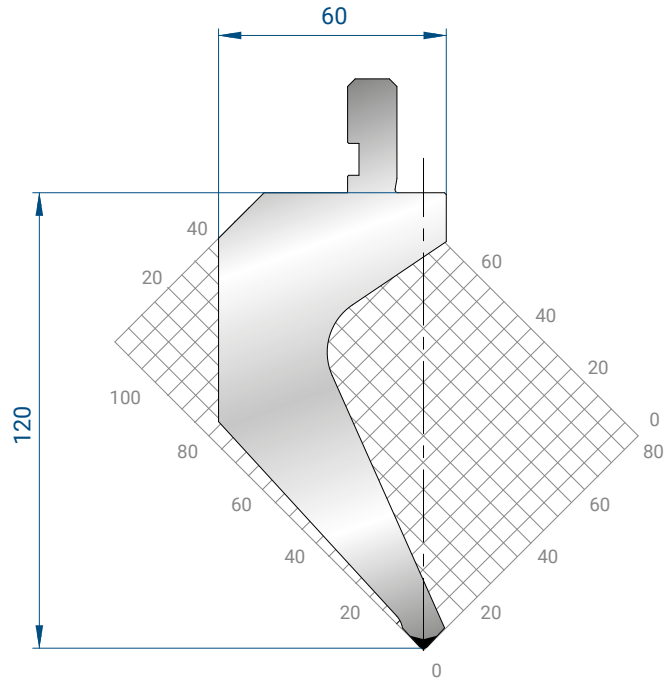

1322

Mat = 42CrMo4
 bonificato / *tempered*
H = 120.00
Max T/m = 100
 α = 85°
R = 1.5

835 mm	26,7 kg
415 mm	13,3 kg
805 mm	26,7 kg
FRAZ. / SECT.	