


## RSL

### SEAT/PATH LIGHT

### REMOTE POWER SUPPLY

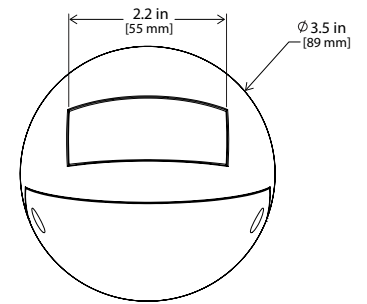

### WARRANTY

Tempo provides a 2 year limited warranty. A 5 year limited warranty will apply when installed by a Tempo Certified Installer.



### APPLICATION

Tempo's RSL is a low voltage, class 2 LED step and aisle lighting luminaire that provides broad and uniform lighting distribution from low mounting heights. With aesthetics and durability in mind, RSL offers a half-dome structure comprised of durable cast aluminum housing and a thick polycarbonate lens for complete protection of the light source. RSL is available with or without graphics display.

### CONSTRUCTION

- Rugged die cast aluminum housing
- Optional curved protective polycarbonate lens
- Impact and vandal resistant
- Easily replaceable LED modules

### OPTICS / LENS / DIFFUSER

- Optional illuminated row marker/graphics panel
- Optional baffle for increased cut-off, recommended when installed on stairs or tiered levels to minimize glare.

### POWER SYSTEM

- Utilizes remote, class II low voltage magnetic transformer
- Dimmable

### SUGGESTED COMPANION PRODUCTS

- LPS® and Guardian – Gray Stripe Step Nose extrusion
- LPS® – Raceway
- LPS J-Box

### PERFORMANCE

- RSL1 - Less than 0.5 watts energy consumption
- RSL2 - Less than 0.75 watts energy consumption
- Exceeds life safety code levels for performance environments
- Expected life (L85) 86,000+ hours of operation

### LIGHT CHARACTERISTICS

- Available in 2700K or 3500K color temperatures
- 80+ Color Rendering Index (CRI)

## RSL

SEAT/PATH LIGHT  
REMOTE POWER SUPPLY

### ORDERING INFORMATION

#### RSL 1

Example: RSL1-BK-27K-B-CL-12

RSL1 Series, Black Anodized, 2700K color temperature, Baffle, Clear Lens, 12V AC

RSL1							
PLATFORM							
Series	Metal Finish	Color Temperature <sup>1</sup>		Baffle	Lens	Voltage	
RSL1 Seat/Path Light	BK Black Anodized	16K	1600K	N None B <sup>2</sup> Baffle	N None CL Clear Lens	12	12V AC
		22K	2200K			29 <sup>3</sup>	29V DC
	CUS Custom Consult Factory	27K	2700K				
		35K	3500K				
		40K	4000K				
		RD	Red				
		GR	Green				
BL	Blue						
AM	Amber						

NOTES:

- (1) Consult factory for alternate color temperatures or colors.
- (2) Baffle recommended when installed on steps or tiered levels to minimize glare.
- (3) 29V transformer by others.

#### RSL 2 (with graphics)

Example: RSL2-BK-27K-B-CL-12-BK-10-GR

RSL2 Series, Black Anodized, 2700K color temperature, Baffle, Clear Lens, 12V AC, Black Graphics Plate, Standard Font on Plate Graphics in Green

RSL2										
PLATFORM										
Series	Metal Finish	Color Temperature <sup>1</sup>		Baffle	Lens	Voltage	Graphics Plate Color	Plate Graphics (Text or Graphics)	Graphic Color	
RSL2 Seat/Path Light w/ graphics	BK Black Anodized	16K	1600K	N None B <sup>3</sup> Baffle	N None CL Clear Lens	12 12V AC 29 <sup>4</sup> 29V AC	BK Black	10	Standard Font (Arial only)	BL Blue GR Green WH White AM Amber R Red
		22K	2200K					20	Special Font (Text only)	
	CUS Custom Consult Factory	27K	2700K				SPL Custom Colors on Special Order	40	Special Graphic <sup>2</sup> (From Factory)	
		35K	3500K					50	Custom (Customer Supplied Art)	
		40K	4000K							
		RD	Red							
		GR	Green							
BL	Blue									
AM	Amber									

NOTES:

- (1) Consult factory for alternate color temperatures or colors.
- (2) Consult factory for specific graphic details.
- (3) Baffle recommended when installed on steps or tiered levels to minimize glare.
- (4) 29V transformer by others.

### SYSTEM INTEGRATION ACCESSORIES


POWER SUPPLIES		
	PWR-T010012/2	120V AC Input, 12V AC Output, 100W, 2 Circuit, Class II Magnetic Transformer, NEMA 3R Case
	PWR-T015012/2	120V AC Input, 12V AC Output, 150W, 3 Circuit, Class II Magnetic Transformer, NEMA 3R Case
	PWR-T025012/2	120V AC Input, 12V AC Output, 250W, 4 Circuit, Class II Magnetic Transformer, NEMA 3R Case
SURGE SUPPRESSION DEVICE A Tempo furnished surge suppression device must be installed on each supplying branch circuit to comply with Tempo's 5-year warranty terms		
	SSD-120	120V Branch Circuit

## RSL


SEAT/PATH LIGHT  
REMOTE POWER SUPPLY

### DIMENSIONAL INFORMATION

RSL 1

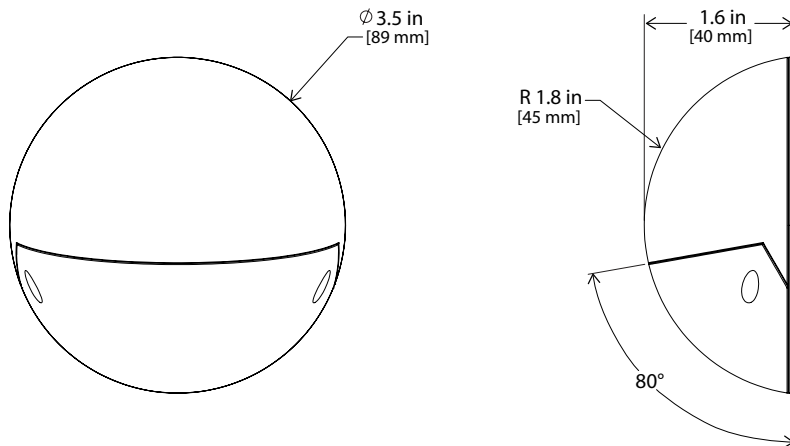

RSL 2 with Graphics

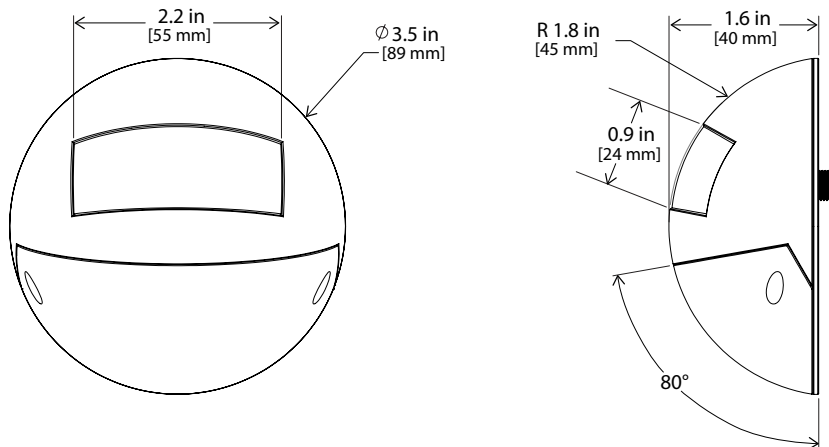

Tempo products and technologies are protected under one or more US and International patents.

Tempo reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program. Please consult [www.tempolc.com](http://www.tempolc.com) for the most up-to-date specifications and technical data.