

**IdleLock with
AutoSense Technology**

INTERMOTIVE
**VEHICLE
CONTROLS**

An ISO 9001:2015 Registered Company

IdleLock™

with AutoSense™ Technology
Automatic Vehicle Security

Overview

- This theft prevention system is automatically activated when the driver exits the vehicle with an InterMotive or OEM fob*
- Transmission is locked in Park while the engine idles, providing power to equipment
- System is automatically disabled when the driver re-enters the vehicle with the fob

Features

- All lights, equipment and HVAC are still fully functional while the system is engaged
- An output is also provided to allow for disabling auxiliary equipment or to lock 10 seconds after the fob leaves the vehicle
- If an attempt is made to move the vehicle without the fob detected, the horn will sound*

**Features may vary by make, model or year.
See instructions for complete details.
FCA vehicles may require an FCA remote start antenna.*



Ignition switch "T" harness shown


Proudly distributed by



(775) 831-2002

Details

EXAMPLE SCHEMATIC

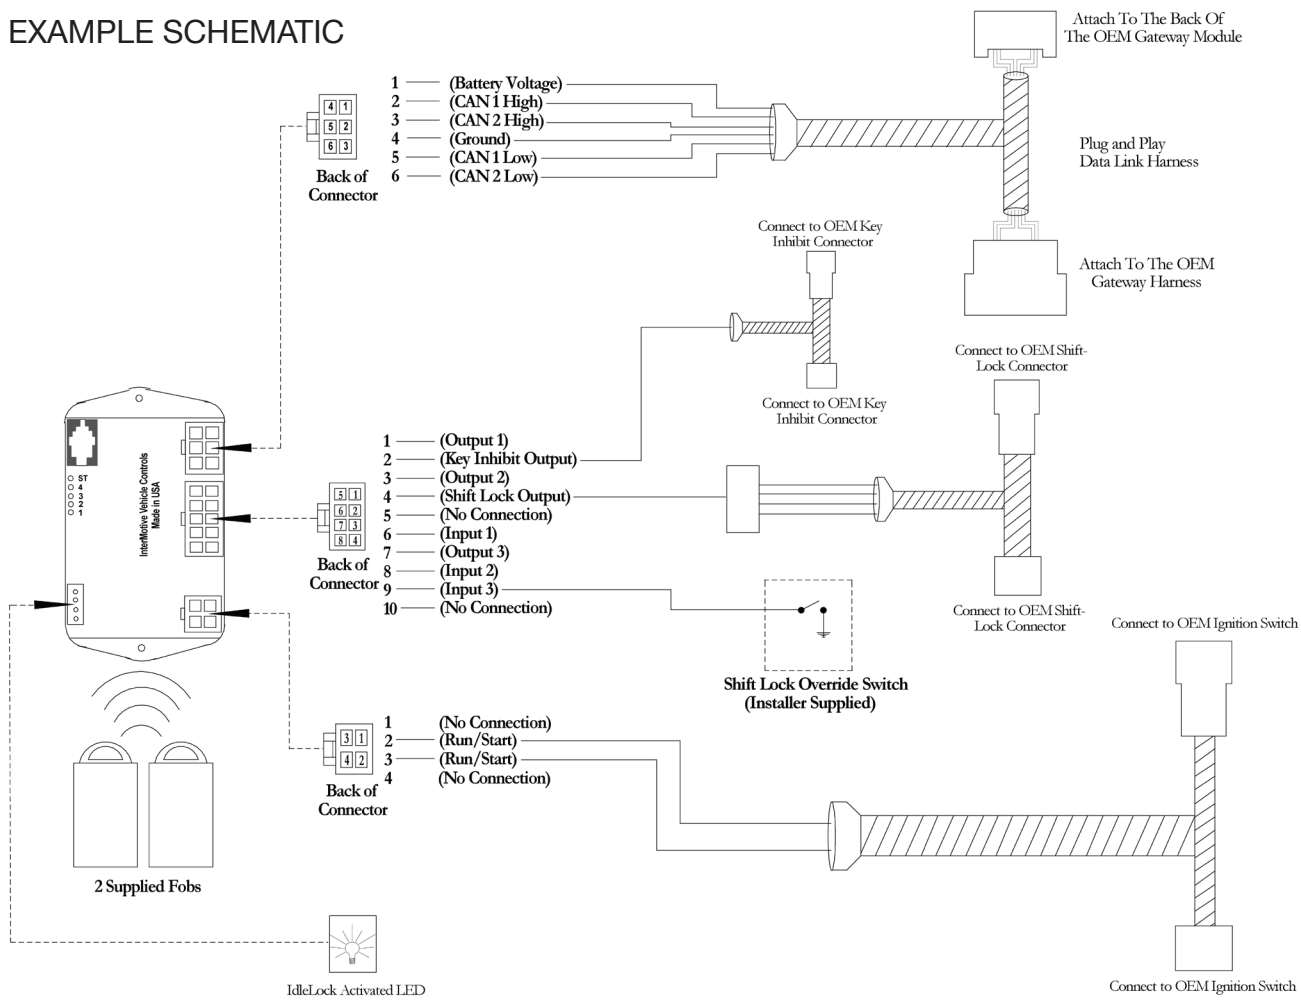

SPECIFICATIONS

Number of Inputs Three active inputs (one high, two low)

Number of Outputs Three active outputs (two high, one low)

Current Draw 120 mA

Quiescent Draw < 2 mA (sleep current)

Temperature Range -40°C to 80°C

Dimensions 3" L x 2" W x 1" H