



"CLOSED" POSITION USED FOR TRANSPORTING.

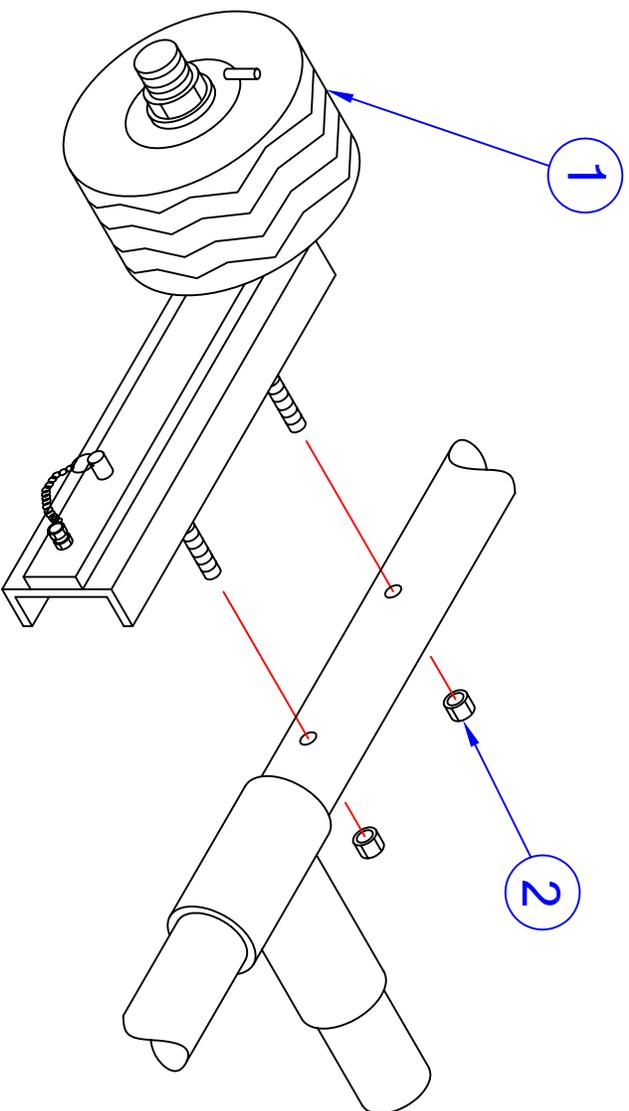

RAISE REAR OF GOAL FRAME (APPROX. 4"),  
FLIP WHEEL TO CLOSED POSITION AND INSERT LOCKING PIN FULLY.

"OPEN" POSITION USED TO REST GOAL ON SURFACE DURING PLAY.

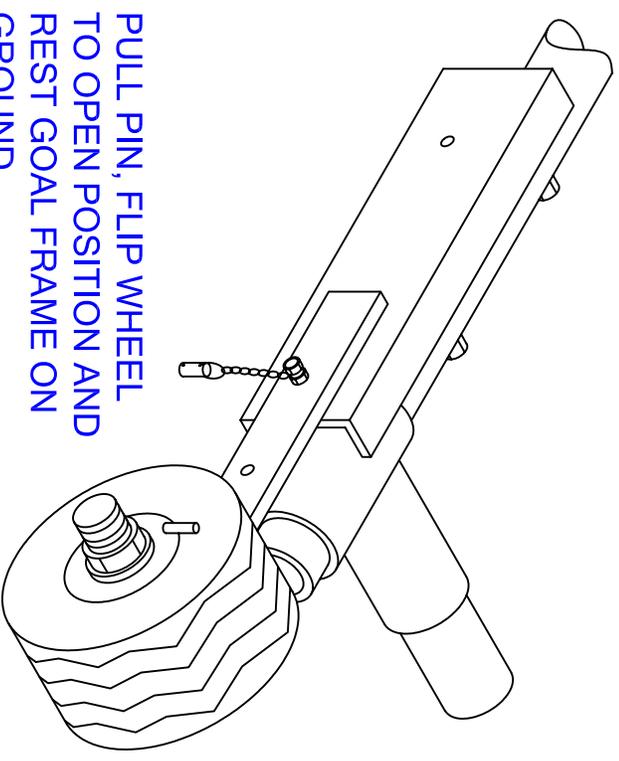

PULL PIN, FLIP WHEEL TO OPEN POSITION AND REST GOAL FRAME ON GROUND.

**PLEASE NOTE:**

- 1) FOR SAFE OPERATION AND CONTINUED HIGH PERFORMANCE FROM THIS EQUIPMENT, INSPECTION AND MAINTENANCE MUST BE PERFORMED BEFORE EACH USE
- 2) USE OF THIS EQUIPMENT OTHER THAN INTENDED, MAY BE HAZARDOUS.
- 3) ALTERATION OR MODIFICATION OF EQUIPMENT MAY BE HAZARDOUS. FOR REPAIR OR REPLACEMENT, PLEASE CALL YOUR DEALER

WHEN INSTALLING ON MODEL SGP-760 OR SGP-400 SOCCER GOALS, RELOCATE TEE FITTING AND REAR CROSSBAR FURTHER TO THE REAR OF THE GOAL.

NOTE:

<b>Jaypro Sports</b> 976 Hartford Turnpike Waterford, CT 06385 USA (800)243-0533 (800)988-3363 Fax www.jaypro.com	
MODEL NO.:	<b>SGP-760WK</b>
PRODUCT NAME:	<b>WHEEL KIT ADAPTER</b>
DRAWN BY: JAC	EFFECTIVE DATE: 5-29-03

# JAYPRO SPORTS

## WHEEL KIT ADAPTER

SGP-760WK

### LIST OF MATERIALS

<u>PIECE NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>QTY.</u>
1	SGPWK1	Wheel Assembly	4
2	HN261	Lock Nut 5/16"-18	8

### ASSEMBLY INSTRUCTIONS AND USE CONSIDERATIONS

This wheel kit is intended to be used to adapt the official portable aluminum soccer goal (Jaypro model no. SGP-760 and SGP-400, also the following can adapt the wheel kit with drilling CSG series, RDCSG series, SGP-3000 and the SGP-3500) into roll-a-way soccer goal. This wheel kit may not adapt to soccer goals supplied by manufacturers other than Jaypro. Read all instructions carefully.

- 1) Locate the "t-fitting" on the rear frame that joins the backstay, backstay connector, and the rear ground-level crossbar. Unfasten and remove the two bolts used to join the backstay connector to the backstay. Slide this assembly further to the rear of the goal and re-assemble.
- 2) Position the wheel assembly (1) over and onto the joint and fasten firmly in place in the existing holes, using the locknuts 5/16"-18 (2) provided. Note: when in "closed" position, the wheel should be located toward the front of the goal. For goals **where the drilling is required** the following is where the holes need to be located for "409" series 43" and 37.5" from goal face, "618" series 44" and 38.5", "721" series 66" and 60.5" and the "824" series 82" and 76.5". Holes should be drilled at 3/8".
- 3) When transporting the goal, position one person at each upright, lift the face of the goal and push the goal backwards. For best results, work both sides in unison and avoid rough or muddy terrain.
- 4) When the goal is properly in position, set the uprights down onto the playing surface. Lift the rear frame (approx. 4"), pull the pin to release the hinged wheel bar and flip the wheel to the "opened" position. Rest the rear frame on the playing surface.
- 5) The wheels supplied with this unit are pneumatic and should be maintained at an inflated pressure of 30 psi.