


Supports For Tapped Shaft

SA

Material : Aluminium Alloy
 Treatment : Most suitable for heavy loads and larger lengths

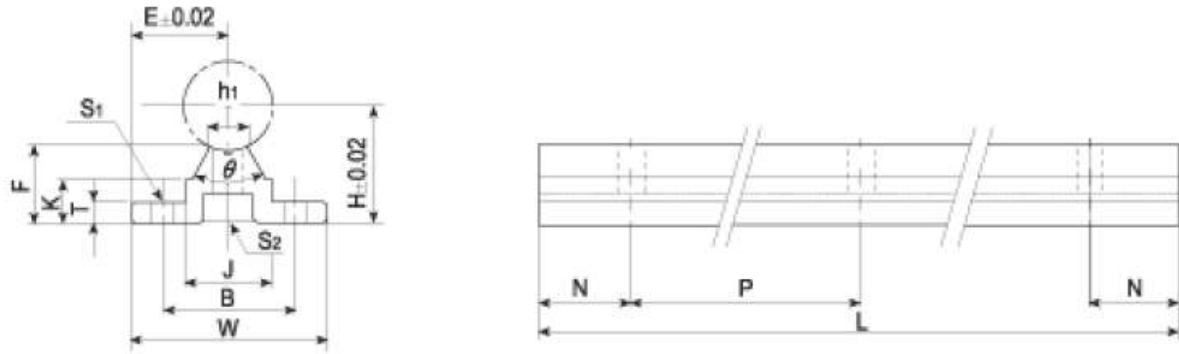

| Model No. | Shaft Diameter | Main Dimensions | | | | | | | | | | Mounting Dimensions | | | | | Weight (Kg / m) |
|-----------|----------------|-----------------|------|-----|------|-------|----|------|------|-------|----------|---------------------|-----|-----|-------|-------|-----------------|
| | | H | E | W | L | F | T | K | J | h_1 | θ | B | N | P | S_1 | S_2 | |
| SA 16 | 16 | 25 | 20 | 40 | 4000 | 17.8 | 5 | 11.7 | 18.5 | 8 | 80 | 30 | 75 | 150 | 5.5 | M5 | 1.600 |
| SA 20 | 20 | 27 | 22.5 | 45 | 4000 | 17.7 | 5 | 10 | 19 | 8 | 50 | 30 | 75 | 150 | 5.5 | M6 | 1.625 |
| SA 25 | 25 | 33 | 27.5 | 55 | 4000 | 21 | 6 | 12 | 21.5 | 8 | 50 | 35 | 100 | 200 | 6.5 | M6 | 2.350 |
| SA 30 | 30 | 37 | 30 | 60 | 4000 | 22.8 | 7 | 13 | 26.5 | 10.3 | 50 | 40 | 100 | 200 | 6.5 | M8 | 2.940 |
| SA 35 | 35 | 43 | 32.5 | 65 | 6000 | 26.5 | 8 | 15.5 | 28 | 13 | 50 | 45 | 100 | 200 | 9 | M8 | 3.550 |
| SA 40 | 40 | 48 | 37.5 | 75 | 4000 | 29.4 | 9 | 17 | 38 | 15.5 | 50 | 55 | 150 | 300 | 9 | M8 | 5.200 |
| SA 50 | 50 | 67 | 55 | 110 | 4000 | 43.34 | 12 | 25 | 47.5 | 17.61 | 50 | 75 | 150 | 300 | 13 | M10 | 6.377 |