




Small, strong and versatile

## Superlift S 225

# The efficient hoist for building and renovation jobs

## Superlift S225 – the compact rope hoist


- Practical, lightweight, easy to assemble and powerful hoist for economic and safe material transport.
- Fast assembly – platform to be fixed by one screw only
- Minimum space requirement due to 90° swivelling platform
- Easy transport due to special lightweight basic components
- Platform suitable for Euro pallets
- Alu masts weighing 15kg only thus especially light and easy to assembly
- Comprehensive safety equipment such as speed-governed safety brake and mast override protection etc.
- Meets European safety standard EN 12158-1
- TÜV approved
- Drive unit can be used with Toplift Universal as well

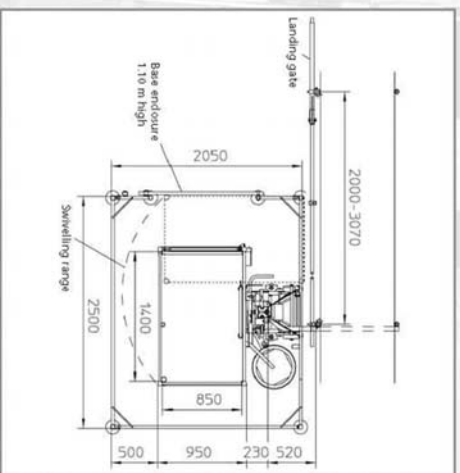

Transport – Due to rubber tyre wheels the base unit can be transported easily on the jobsite.



Platform – The swivelling platform enables use on narrow sites.

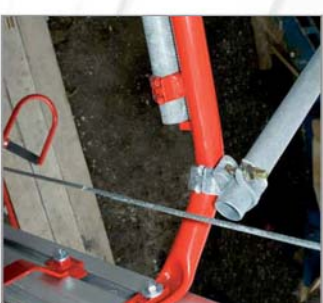


Mast fixing – The aluminium mast can be steplessly fixed to the scaffold resp. building.



Drive unit can be used either for Superlift S225 or Toplift 225 Universal

## Technical Data

Capacity [kg]	200
Drive system	Rope (6mm diameter)
Platform [m]	Interior dimensions (LxBxH) 1,40 x 0,85 x 1,10
Loading height [m]	0,20
Max. lifting height [m]	50
Free mast tip [m]	1
Tie distance [m]	2
Height of alu mast [m]	2
Weight of alu mast [kg]	15
Weight of base unit with carriage [kg]	120
Weight of drive unit [kg]	54
Weight of platform [kg]	75
Lifting speed [m/min]	25
Motor capacity [kW]	1,3
Fuse [ampere]	16 (slow)
Voltage [V/Hz]	230 / 50
Control voltage [V]	24

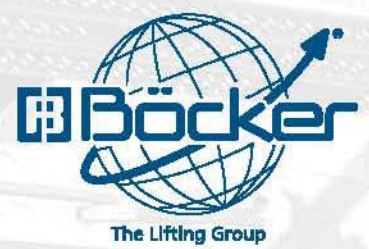

**Böcker**

The Lifting Group