


MAINTAIN 5'-0" MAX SPACING
BETWEEN POSTS TO MINIMIZE
CABLE DEFLECTION

NOTE: BUILDING CODES VARY BY CITY & COUNTY. FOLLOWING THE INSTALLATION AND RAILING DESIGN INSTRUCTION AS DETAILED IN THIS DRAWING DOES NOT GUARANTEE CODE COMPLIANCE IN ALL AREAS. BEFORE STARING THE PROJECT, CHECK WITH LOCAL REQUIREMENT FOR USING AND INSTALLING CABLE RAILINGS.


DESIGN RECOMMENDATION: CABLE VIEW ALUMINUM RAILING WITH CABLE INFILL FASCIA MOUNTED

DOUBLE POST

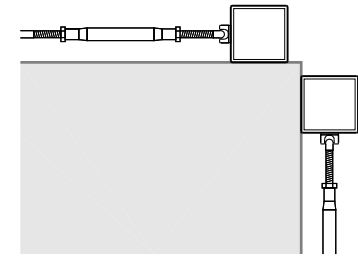


BOTH FITTINGS ATTACH
TO FACE

DOUBLE POST

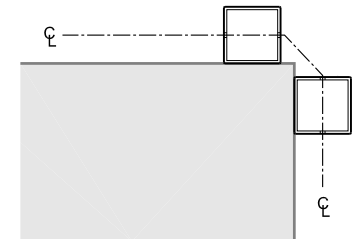

CABLE RUNS CONTINUOUSLY
THROUGH THE CORNER

SINGLE POST

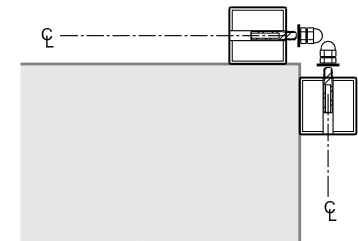

BOTH FITTINGS ATTACH
THROUGH POST



Vancouver Business Park
3315 NE 112th Ave 72/73
Vancouver Wa 98682
Phone/Fax: 1-888-686-7245 (RAIL)
web: www.stainlesscablerailing.com
sales:stainlesscablerailing.com