


For Patent Information go to <https://goo.gl/2z62aS>

SLXTM PRISM SCOPE

ACSS[®] CYCLOPS[™] CQB


GETTING TO KNOW THE ACSS® CYCLOPS™ CQB RETICLE

The ACSS (Advanced Combined Sighting System) is a giant leap forward in reticle design that increases first hit ratio and decreases time on target dramatically. The Cyclops reticle combines moving target leads, bullet drop compensation, and range estimation into a simple-to-use sighting system. Use the horseshoe as a large, quick aiming reference for fast snap shooting up close. For precision shooting, use the tip of the chevron located inside the horseshoe.

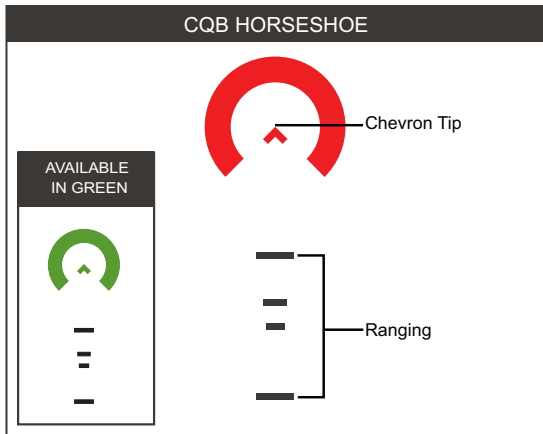


BULLET DROP COMPENSATION (BDC)

Gravity will affect your bullet's trajectory (or path). The BDC starts at the top of the chevron at 50 yards. The point formed by the underside of the chevron, and the area level with the bottom of the chevron, act as additional aiming references for different ranges depending on caliber. Simply aim using the area of the chevron that coincides with the range to target. We recommend that you establish a steady, supported position in order to utilize the BDC effectively.

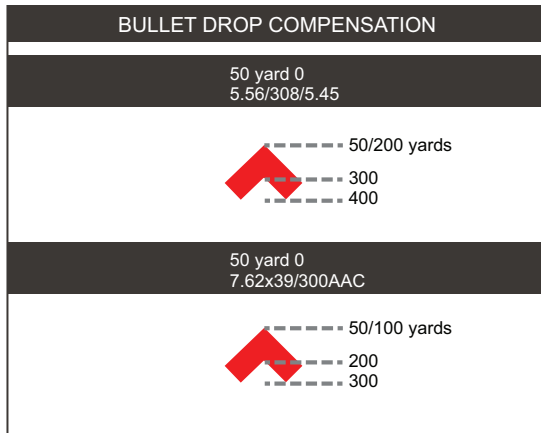


LEADING YOUR TARGET

The average target moves at 8.6 mph. The leading edge of the “horseshoe” section of the reticle is set for a target moving at a 90 degree angle to the shooter. Depending on the direction of the target’s movement, fire using the edge of the horseshoe instead of the center chevron. If the target is moving left to right, use the left edge of the horseshoe. If the target is moving right to left, use the right edge. This technique is best used from 100 to 300 yards and is highly effective on moving targets.

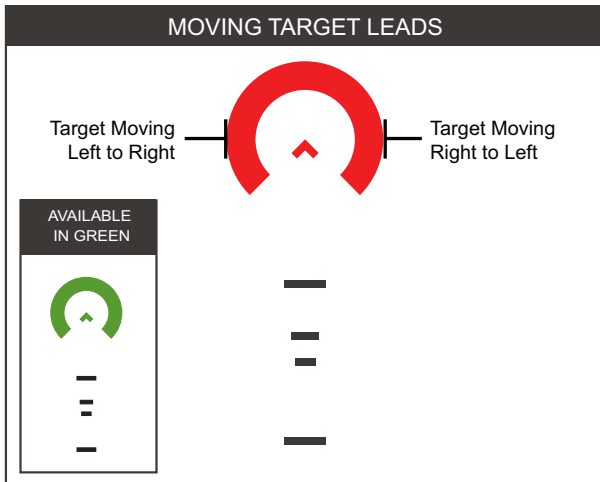

RANGE YOUR TARGET

Knowing the proper range of your target is crucial in order to use the right hold on the BDC. Starting vertically at the bottom line and measuring upwards will range estimate targets 5'10" tall. If the top of the target reaches the highest ranging line, the target is 200 yards away. Additional lines in the middle indicate 300 and 400 yard distances. Horizontal ranging is accomplished using the width of the ranging lines. Each ranging line measures an 18" wide target from side to side; match the width of the target to the appropriate ranging line to determine its distance.

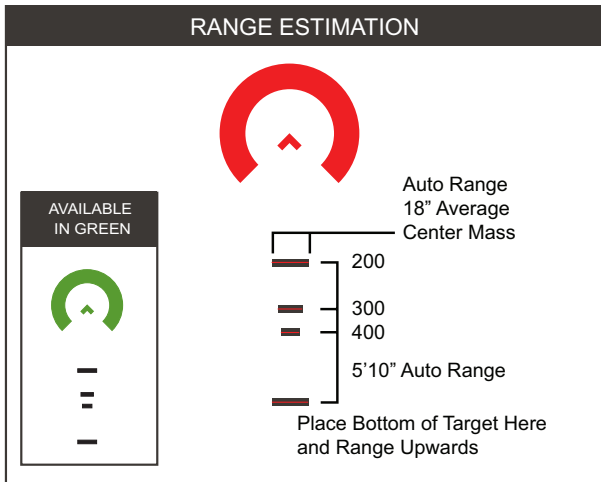

Other ACSS Reticle Options

ACSS reticles are calibrated to work with a wide array of calibers and loadings. Please visit www.primaryarmsoptics.com to learn to which reticles are right for you.




4


**ACSS-CQB-M5-
5.56/.308/5.45x39**




**ACSS-CQB-M5-
7.62x39/300AAC**




ACSS-CQB-M2



**ACSS-CQB-
300BLK/7.62X39**



**DUAL RED/GREEN
ACSS-5.56/5.45/.308**



**DUAL RED/GREEN
ACSS-AURORA**



LIFETIME WARRANTY

Your Primary Arms SLx Compact Prism Scope is covered by the Primary Arms Lifetime Warranty. If a defect due to materials or workmanship, or even normal wear and tear has caused your product to malfunction, Primary Arms will either repair or replace your product. You can find more details about our lifetime warranty at www.primaryarmsoptics.com.

Email: info@primaryarmsoptics.com

Toll-free at 855-774-2767

www.primaryarmsoptics.com

For more information on these optics, go to:

<http://primaryarmsoptics.com/product-category/prism-scopes/>