

#10 WoodTite Fasteners

Head

- Head Style: 1/4"
- Wet paint application for consistent socket fit and weathering performance

Washer

- Bonded Sealing Washer

Thread

- Major Hi Diameter: .194"/.184"
- Minor Diameter: .133"/.128"

Point


- Type-17 point helps to penetrate metal more quickly while minimizing chips
- 26 Degree sharp point for quick piercing

Finish

- Zinc Plated with Oxysel® Coating

Material

- Carbon Steel

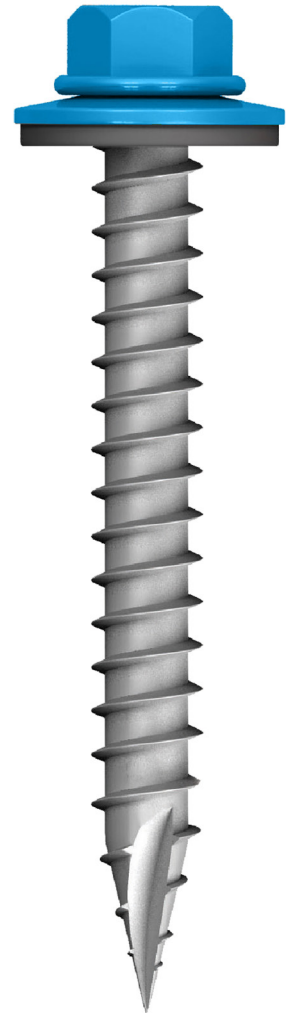

#10 WoodTite

SIZE	ITEM#	# PER M	BOX QTY
10-14 x 1	83639ZBN99XXHSL	7.4	2,500
10-14 x 1-1/2	83642ZBN99XXHSL	9.8	2,500
10-14 x 2	83644ZBN99XXHSL	12.0	2,000
10-14 x 2-1/2	83646ZBN99XXHSL	14.2	1,500
10-14 x 3	83648ZBN99XXHSL	16.4	1,000

ENGINEERING TEST REPORT

Minimum Tor-sional	Minimum Tensile	Minimum Shear	Pull Out SPF2 - 1.5" Pene-tration	Revolutions/In.
68 in. lbs	2,100lbs.	1,265 lbs.	925 lbs.	7.0

All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Actual field values may vary, therefore we assume no liability for use of this information. Pull out values are a measurement of wood material strength

#10 WoodTite Fastener




Bonded seal washer to provide for positive sealing



Wet paint application for consistent socket fit and weathering performance

Deep thread forms for enhanced pullout values

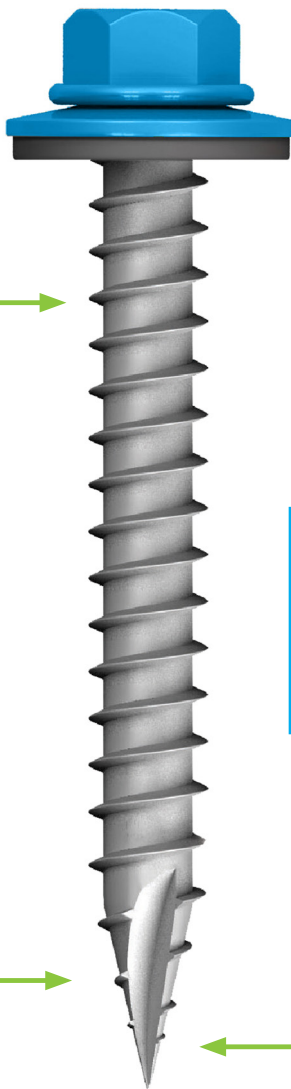

INSTALLATION INSTRUCTIONS:

- Do not use impact style guns
- Use an electric screw gun 2,500 RPM max

Type-17 Point helps to penetrate metal more quickly while minimizing chips

26 Degree Sharp Point