

#14 WoodTite Fasteners

Head

- Head Style: 1/4"
- Wet paint application for consistent socket fit and weathering performance

Washer

- Bonded Sealing Washer

Thread

- Major Hi Diameter: .194"/.184"
- Minor Diameter: .133"/.128"

Point


- Type-17 point helps to penetrate metal more quickly while minimizing chips
- 26 Degree sharp point for quick piercing

Finish

- Zinc Plated with Oxyseal® Coating

Material

- Carbon Steel

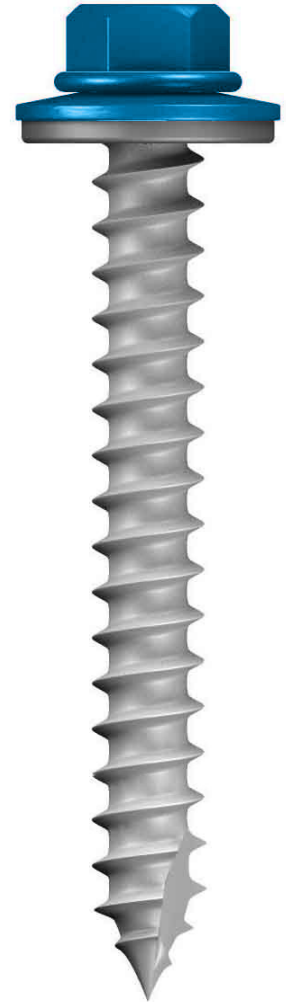

#14 WoodTite

Test Material	Ultimate Pullout lbs.
SPF #2	1,080 (1 1/2 Penetration)
7/16" OSB	213
5/8" OSB	301
1/2" CDX	520
5/8" CDX	430
3/4" CDX	718

#14 WoodTite

SIZE	ITEM#	# PER M	BOX QTY
14-10 x 1	80613ZBN99XXHSL	13.4	2,500
14-10 x 1-1/2	80001ZBN99XXHSL	17.9	2,000
14-10 x 2	80009ZBN99XXHSL	22.7	1,500
14-10 x 2-1/2	82014ZBN99XXHSL	26.3	1,000
14-10 x 3	89016ZBN99XXHSL		1,000

FASTENER STRENGTH CHARACTERISTICS

Size	Steel	Tensile	Shear	Torsional
#14-10	C1022	3150 lbs.	2150 lbs.	125 Inch lbs.

All test results and recommendations are based on laboratory tests. Specific job site conditions should be taken into consideration when specifying the proper fastener. Actual field values may vary, therefore we assume no liability for use of this information. Pull out values are a measurement of wood material strength

#14 WoodTite Fastener




Bonded seal washer to provide for positive sealing



Wet paint application for consistent socket fit and weathering performance

Deep thread forms for enhanced pullout values

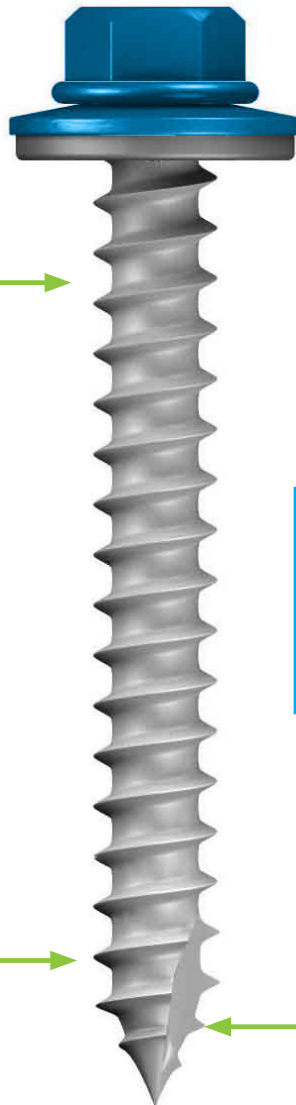

INSTALLATION INSTRUCTIONS:

- Do not use impact style guns
- Use an electric screw gun
2,500 RPM max

Type-17 Point helps to penetrate metal more quickly while minimizing chips

26 Degree Sharp Point