

# 6 Inch Commercial LED Down Light

## FEATURES ///

### ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- The Etrenzik LED 6 Inch Commercial Down Light delivers up to 3200 lumens.
- High efficiency replacement for commercial and industrial applications.
- UL Certified for acceptance in rebate, incentive and other programs nationwide
- No harmful ultraviolet or infrared wavelengths
- Contains no lead or mercury

## PRODUCT SPECIFICATIONS ///

Superior quality white LED light output using CREE Chip on Board technology. LED source has been testes in accordance with IESNA LM-80-2008 in an independant lab. Standard color management maintains superior color consistency over time and temperature. CCT classification according to the ANSI C78.377-2008 standard.




The source mounts directly to heat sink, extend aluminum heat sink with even distribution hackle cool board. High thermal conductivity, reasonable of radiation coefficient and convection coefficient to solve thermal management system design of the cooling. This enables the LEDs to consistently run cooler, providing significant boosts to lifetime, efficacy, and color consistency.



The reflector is made of metal material and with surface oxidized, which effectively enhances the lumen output ratio. Also its fish scale shape design on interior surface prevent lighting glare very well, making the light effect even and free from layering.

## DIMENSIONS ///

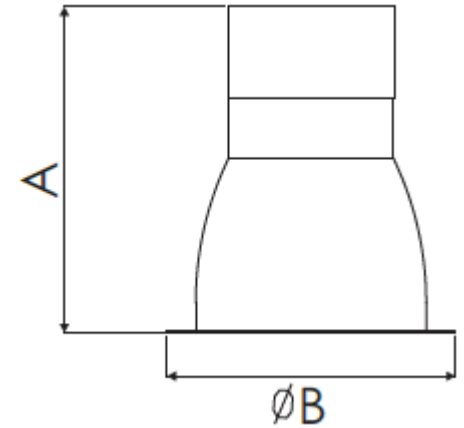

Model	Item No.	Input Power	Luminus Flux	Input Voltage	Dimming Style	Sign Current
6 INCH	ECDL6-27W-XXX	27 Watts	2268 LM	100-277VAC	0-10V	
6 INCH	ECDL6-40W-XXX	40 Watts	3200 LM	100-277VAC	0-10V	
6 INCH	ECDL6-27WH-XXX	27 Watts	2214 LM	100-347VAC	0-10V	.2MA
6 INCH	ECDL6-40WH-XXX	40 Watts	3080 LM	100-347VAC	0-10V	.2MA

Item No.	A	B
ECDL6-27W-XXX	7.87'	7.46'
ECDL6-40W-XXX	8.64'	7.48'
ECDL6-27WH-XXX	7.87'	7.46'
ECDL6-40WH-XXX	8.64'	7.48'

## ORDERING INFORMATION ///

Example = ECDL6-27W-30

Category	Size	Dimming	Wattage	CCT(XX)
ECDL = Commercial Downlight	6= 6Inch	0-10V	27W = 27W 40W = 40W	30 = 3000K 40 = 4000K 50 = 5000K

## CONTACT

**Etrenzik Manufacturing**  
 (866) 267-7047 office • (678) 807-1900 Fax  
 Info@etrenzik.com

169 Creamer Drive  
 Alpharetta, GA 30004  
 www.etrenzik.com