


Linear Light


FEATURES ///

- Long life: 60,000 hours
- Up to 8,000 Lumens
- Smooth, uniform dimming 0-10V (100-240V)
- High efficiency alternative to T12 and T8 linear fluorescent troffers
- Excellent color consistency and superior lumen maintenance
- UL/cUL listed
- DLC listed
- Emergency Back Up Available

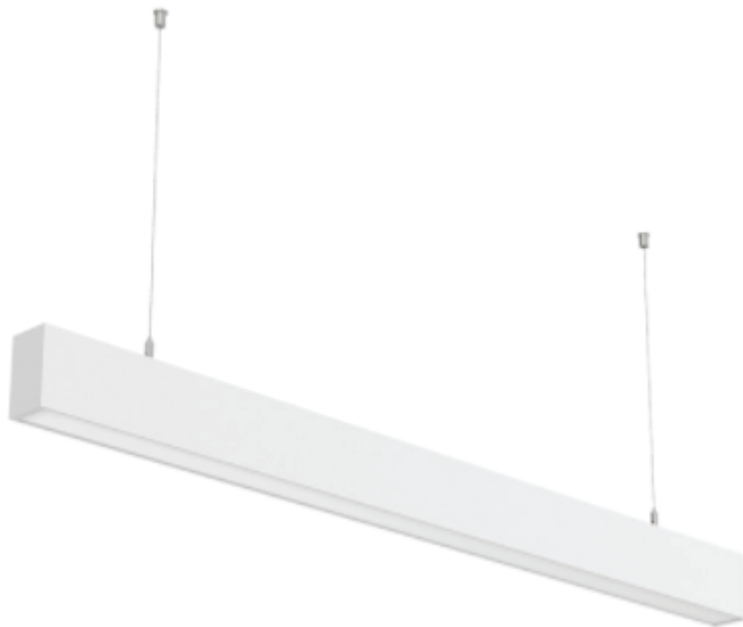

PRODUCT SPECIFICATIONS ///

3000lm/4000lm@4ft
 6000lm/8000lm@8ft
 CCT: 3000K, 3500K, 4000K
 CRI: >80Ra, >90Ra
 UGR: <19
 SDCM: <=3
 Beam Angle: 80°/120°
 22W/29W@4ft
 43W/57W@8ft
 Efficacy: 130lm/W
 Voltage: 100-277V
 THD: <15%
 Size: 4ft, 8ft(Length)
 Color: White, Black, Silver
 Finish: Powder coated,
 Material: Extruded aluminum Profile
 Cover: PMMA Frosted Lens
 End Cap: Die cast aluminum

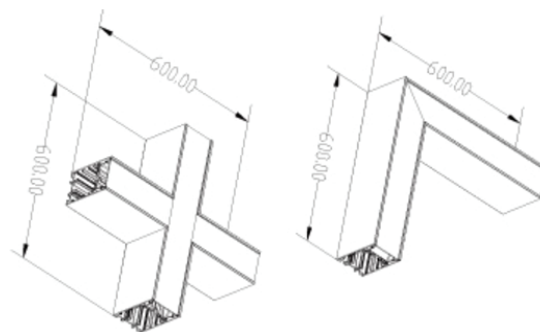

ORDERING INFORMATION ///

Etrenzik Linear Light Architectural										For Example - ELLA4-2940	
Manufacturer	Model		Length		Wattage/Lumens		Color				
Etrenzik	E	Linear Light	LLA	4FT	4	4FT 22W/3000L	22	3000K	30		
		Architectural		8FT	8	4FT 29W/4000L	29	3500K	35		
						8FT 43W/6000L	43	4000K	40		
						8FT 57W/8000L	57	5000K	50		

CONTACT

Etrenzik Manufacturing, Inc.
 (866) 267-7047 office • (678) 807-1900 Fax
 Info@etrenzik.com

Etrenzik Manufacturing, Inc.
 169 Creamer Drive
 Alpharetta, GA 30004
 www.etrenzike.com / www.etrenzik.com