

LED Troffer Light

FEATURES ///

- Long life: 80,000 hours
- Up to 6,600 Lumens (150/lm/w)
- Smooth, uniform dimming (120-277V)
- High efficiency alternative to T12 and T8 linear fluorescent troffers
- Excellent color consistency and superior lumen maintenance
- UL/cUL listed
- DLC listed
- 5 Year Warranty
- BAA Certified available upon request




PRODUCT SPECIFICATIONS ///

Input Line Voltage: 120 - 277 VAC
 Lamp Life (Rated) 100,000 hrs
 Minimum Starting Temp -4°F
 Maximum Operating Temp..... 114°F
 CRI >80

REPLACEMENT COMPARISON ///

SYSTEM	BALLAST FACTOR	INPUT WATTS	LED ENERGY SAVINGS (%)
5,600 Lumen 2X4 LED	1	40	
2 Lamp 32W T8 HBF	1.18	74	42%
2 Lamp 28W T5	1	63	31%
2 Lamp 32W T8 NBF	0.88	59	26%

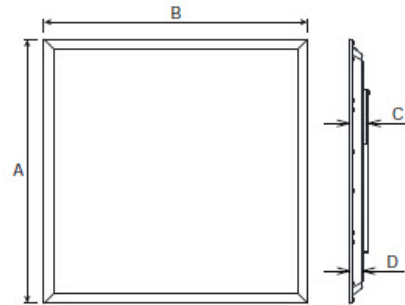

Measurement

Model	Dimension(mm)				Size(mm)	Product Weight (Kg)		Package weight (Kg)		Carton Size(cm)	Qty/CTN	20GP (pcs)	40HQ (pcs)
	A	B	C	D		N.W/PC	G.W/PC	N.W/CTN	G.W/CTN				
2X2	603	603	42	32	603*603*42	1.9	2.7	9.5	13.5	66"24"17.5" (1PC/inner box)	5	1020	2580
						1.9	2.3	9.5	13.8	66"30"17.5" (5PC/inner box)	5	1170	2685
1X4	303	1213	42	32	303*1213*42	2.1	2.9	10.5	14.5	128"24"17.5" (1PC/inner box)	5	980	2250
						2.1	2.5	12.6	15.0	128"30"17.5" (5PC/inner box)	5	1116	2664
2X4	603	1213	42	32	603*1213*42	3.2	4.8	12.8	19.2	128"33"17.5" (1PC/inner box)	4	528	1136
						3.2	4.2	12.8	16.8	128"33"17.5" (5PC/inner box)	4	576	1328

ORDERING INFORMATION ///

Etrenzik Panel BL Naming Convention

Example - EPBL24-4040EM

Manufacturer	Model	Size	Wattage	Color	Emergency Backup	0-10V Dimmable	Motion Sensor					
Etrenzik	E Panel Back Lit PBL	1X4 14	25W	25W	RGBW	RGBW	No					
		2X2 22	30W	30W	5000K	50	Yes	Blank	Yes	Blank	No	Blank
		2X4 24	40W	40W	4000K	40						
		Power Selectable	30-50W	PS 3050	3500K	35	3000K	30	3500K-5000K	CCT3550	3000K-5000K	CCT30-50

CONTACT

Etrenzik Manufacturing, Inc.
 (866) 267-7047 office • (678) 807-1900 Fax
 Info@etrenzik.com

Etrenzik Manufacturing, Inc.
 169 Creamer Drive
 Alpharetta, GA 30004
 www.etrenzike.com / www.etrenzik.com