

Post Top Light

100W-200W


APPLICATIONS ///

Street Lighting, Parking Lots, Service Departments, Parks, Pathways...

FEATURES ///

An industry leading design with the combination of the superior thermal conductivity of an extrusion heat sink with a ventilated housing. Etrenzik's superior sleek design is not only appealing to the eye, but reduces wind pressure on the fixture, allowing for a much wider range of possible applications.

Vented powder-coated housing for protection while fresh air plenum provides lowest in class LED array and power supply operating temperatures. Built in photocell option for dusk to dawn environments as well as dimming for full control requirements. Ask your representative today!

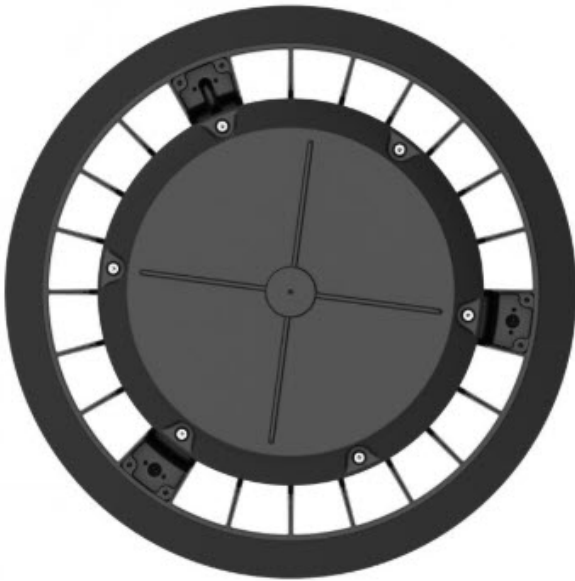

Product Dimensions	Carton Weight
24"W x 15.75"H	21.45 lbs.

Ordering information

For Example: EPTL-15050

Etrenzik Pole Light	Wattage		Lumens	Color		Mounts		Controls (Blank if None)	
EPTL	100W	100	13,000	4000K	40	Adjustable mount	AM	PhotoCell	1
	150W	150	19,500	5000K	50	Direct mount	DM	Motion Sensor	2
	200W	200	26,000	5700K	57	Yoke Mount	YM		

CONTACT

Etrenzik LED, Inc.
 (866) 267-7047 office • (678) 807-1900 Fax
 Info@etrenzik.com

169 Creamer Drive
 Alpharetta, GA 30004
 www.etrenzikLED.com / www.etrenzik.com