

# Slim Shoebox

60W-150W

## APPLICATIONS ///

Street Lighting, Parking Lots, Service Departments, Tunnels, Service Stations...

## FEATURES ///


An industry leading design with the combination of the superior thermal conductivity of an extrusion heat sink with a ventilated housing. Etrenzik's superior sleek design is not only appealing to the eye, but reduces wind pressure on the fixture, allowing for a much wider range of possible applications.

Vented powder-coated housing for protection while fresh air plenum provides lowest in class LED array and power supply operating temperatures. Built in photocell option for dusk to dawn environments as well as dimming for full control requirements. Ask your representative today!



## Mounting Options ///

- Standard Mounting Option
- Standard 2-1/2" slip fitter
- Standard Bolt Arms
- Standard Yoke Mount

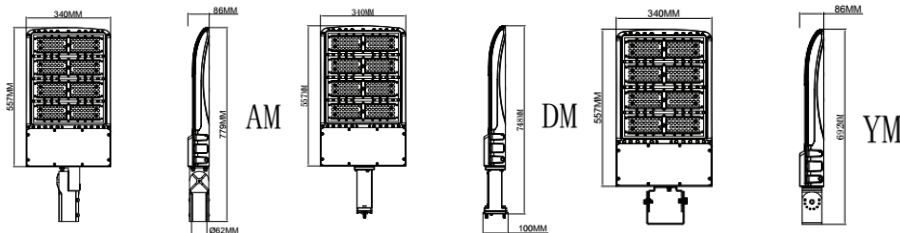

Product Dimensions	Carton Weight
32.28"W x 15.35"D x 5.7"H	26.45 lbs.

Ordering information

For Example: EPL-15050AM

Etrenzik Pole Light	Wattage		Lumens	Color	Mounts	Controls (Blank if None)			
	60W	100W				PhotoCell	Motion Sensor		
EPL	60	60	9,000	4000K	40	Adjustable mount	AM	PhotoCell	1
	100	100	15,000	5000K	50	Direct mount	DM	Motion Sensor	2
	150	150	22,500	5700K	57	Yoke Mount	YM		

## CONTACT

Etrenzik LED, Inc.  
 (866) 267-7047 office • (678) 807-1900 Fax  
 Info@etrenzik.com

169 Creamer Drive  
 Alpharetta, GA 30004  
 www.etrenzikLED.com / www.etrenzik.com