

Etrenzik Post Top LED Retrofit

30W, 45W, 60W, 65W Solid State Luminaire

APPLICATIONS ///

Etrenzik's LED's Solstice units are designed to retrofit into almost any HID fixture using custom fabricated brackets and plates for easy plug and play installation. We can articulate our units and offer a wide array of innovative optics to deliver the light precisely where it's needed. Dark Sky Compliant. Four way switchable power options on board. This unit also comes with an Energy Saver program that is accessed via a switch on the board.

FEATURES ///

- Multiple temperature control values. Over temperature protection, shut down at critical temperature and resume operation temperature.
- Undervoltage lockout for power off or brownout
- Soft start
- 0 – 10 V Dimming compatible
- Undervoltage lockout for power off or brownout.
- 0-10v Input Port.
- Occupancy sensing Current accuracy over the LED operating temperature range +/- 3%.

SPECIFICATIONS ///


L70>69600 Hours
 Commercial/Architectural Grade
 Architectural UV resistant powder coat finish
 Lighting Facts™ Uniform LM-79 Reporting Template
 Photo-electric Switch (Optional) – Listed (WJCT),
 UL&cUL Listed
 Dimmable: 1-10VDC/PWM/Resister (3 in 1)
 System Watts: 30W/45W/60W/65W
 Voltages: 100-277Vac 347-480Vac
 CRI:70+
 Operating Temp: -30 °C to +50 °C
 Operating Humidity: 20% to 90%RH
 Power Fact(PF) : 0.99
 Power Supply Efficiency: > 90%

Sample Part # EPTR-45W-D-35K-E26

Family	Fixture Wattage		Fixture Wattage		Color		Accessories	
	30W	30	0-10V	D	3000K	30K	E26 Mount	E26
EPTR	45W	45	Dimmable	D	3500K	35K	E39 Mount	E39
	60W	60			4000K	40K		
	65W	65			5000K	50K		
					5700K	57K		



DIMENSIONS ///

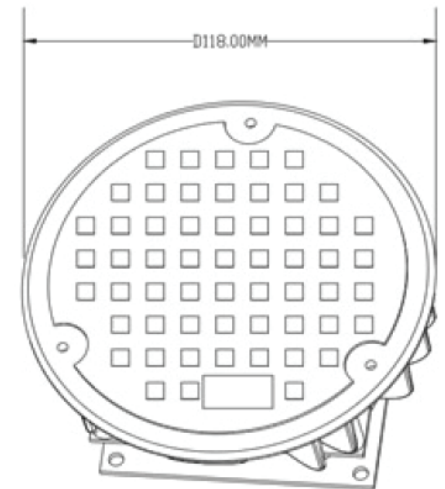

CONTACT

Etrenzik Energy
 (866) 267-7047 office · (678) 807-1900 Fax
 Info@etrenzik.com

Etrenzik LED
 169 Creamer Drive
 Alpharetta, GA 30004
 www.etrenzikLED.com / www.etrenzik.com