

# HAZARDOUS LOCATION

LED lighting equipment at-a-glance




- To access product specific web page, cut sheet, ies files and other information click on product image.
- Detailed information, all mounting possibilities and other options can be found on the products cut sheet.
- Higher temperature demands may have an affect on warranty, see website for warranty information.
- Specifications, upgrades and data are subject to change without notice.

5935 West 84th St. | Indianapolis, IN 46278 | P: 765.298.8030 | [www.SolasRay.com](http://www.SolasRay.com)



## THE Beast




20" dia. x 9" h

### The HazLoc Beast

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HH18-170	170w	5K	19,500 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HH22-215	219w	5K	24,055 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HH32-368	383w	5K	39,647 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HH40-419	420w	5K	45,700 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66

## THE mini Beast



14" dia. x 4.2" h

### The HazLoc mini Beast

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HL06-055	53w	5K	6,061 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HL12-104	106w	5K	13,011 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HL16-170	166w	5K	19,058 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66

## THE Boss




16.14" dia. x 8.5" h

### The Boss

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR16C-140	140w	3K / 5K	14,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-140	140w	3K / 5K	14,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-160	160w	3K / 5K	16,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-160	160w	3K / 5K	16,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-180	180w	3K / 5K	18,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-180	180w	3K / 5K	18,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-200	200w	3K / 5K	20,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-200	200w	3K / 5K	20,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-220	220w	3K / 5K	22,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-220	220w	3K / 5K	22,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +65°C (149°F)	T5, T4, T4A	IP67
HTR16C-240	240w	3K / 5K	24,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +55°C (131°F)	T5, T4, T4A	IP67
HTR16C-240	240w	3K / 5K	24,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +55°C (131°F)	T5, T4, T4A	IP67

## THE Guard S series



10.95" dia. x 9.6" h

### The Guard S series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR11S1-120	120w	3K / 5K	12,000 Lm	C1D1, C2D1	120v or 277v	-65°C to +85°C (185°F)	T5	IP67
HTR11S1-140	140w	3K / 5K	14,000 Lm	C1D1, C2D1	120v or 277v	-65°C to +65°C (149°F)	T5	IP67
HTR11S1-150	150w	3K / 5K	15,000 Lm	C1D1, C2D1	120v or 277v	-65°C to +65°C (149°F)	T5	IP67
HTR11S2-120	120w	3K / 5K	12,000 Lm	C1D2	120v or 277v	-65°C to +85°C (185°F)	T4A	IP67
HTR11S2-140	140w	3K / 5K	14,000 Lm	C1D2	120v or 277v	-65°C to +85°C (185°F)	T4A	IP67
HTR11S2-150	150w	3K / 5K	15,000 Lm	C1D2	120v or 277v	-65°C to +65°C (149°F)	T4A	IP67

## THE Guard C series



10.95" dia. x 9.6" h

### The Guard C series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR11C2-120	120w	3K / 5K	12,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +100°C (212°F)	T3C	IP67
HTR11C2-120	120w	3K / 5K	12,000 Lm	C1D2, C2D2	480v	-65°C to +85°C (185°F)	T4A	IP67
HTR11C2-140	140w	3K / 5K	14,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR11C2-140	140w	3K / 5K	14,000 Lm	C1D2, C2D2	480v	-65°C to +65°C (149°F)	T4A	IP67

## THE Monitor S series



9.21" dia. x 7.61" h

### The Monitor S series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR92S-065	65w	3K / 5K	6,500 Lm	C1D2, C2D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR92S-075	75w	3K / 5K	7,500 Lm	C1D2, C2D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR92S-095	95w	3K / 5K	9,500 Lm	C1D2, C2D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67

## THE Monitor C series




9.21" dia. x 7.61" h

### The Monitor C series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR91C-060	60w	3K / 5K	6,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR91C-060	60w	3K / 5K	6,000 Lm	C1D1, C2D1	480v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	3K / 5K	8,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	3K / 5K	8,000 Lm	C1D1, C2D1	480v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	3K / 5K	10,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	3K / 5K	10,000 Lm	C1D1, C2D1	480v	-65°C to +55°C (131°F)	T4	IP67
HTR92C-060	60w	3K / 5K	6,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR92C-060	60w	3K / 5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	3K / 5K	8,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	3K / 5K	8,000 Lm	C1D2	480v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	3K / 5K	10,000 Lm	C1D2	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	3K / 5K	10,000 Lm	C1D2	480v	-65°C to +55°C (131°F)	T4	IP67

## THE Lookout S series



7.25" dia. x 6.21" h

### The Lookout S series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR7S1-040	40w	3K / 5K	4,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR7S1-060	60w	3K / 5K	6,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C	IP67
HTR7S2-040	40w	3K / 5K	4,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR7S2-060	60w	3K / 5K	6,000 Lm	C1D2	120v / 277v	-65°C to +65°C (149°F)	T3C	IP67

## THE Lookout C series



7.25" dia. x 6.21" h

### The Lookout C series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR7C1-040	40w	3K / 5K	4,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	3K / 5K	4,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	3K / 5K	4,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-060	60w	3K / 5K	6,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	3K / 5K	6,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	3K / 5K	6,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-040	40w	3K / 5K	4,000 Lm	C1D2	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	3K / 5K	4,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	3K / 5K	4,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	3K / 5K	6,000 Lm	C1D2	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	3K / 5K	6,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	3K / 5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67

**THE Scout**




7.55" dia. x 14.08" h

**The Scout**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTJS-020	20w	3K / 5K	2,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJS-020-R	20w	Red		C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJS-020-G	20w	Green		C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-040	40w	3K / 5K	4,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-050	50w	3K / 5K	5,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-070	70w	3K / 5K	7,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C, T4A	IP67
HTJM-080	80w	3K / 5K	8,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C, T4A	IP67
HTJM-080	80w	3K / 5K	8,000 Lm	C1D2, C2D1	480v	-65°C to +65°C (149°F)	T3C, T4A	IP67

**THE Spotter**

4.84" dia. x 7.6" h




**The Spotter**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR5-020	20w	5000K	2,000 Lm	C1D2, C2D2	24v	-65°C to +85°C (185°F)	T3B, T5	IP67
HTR5-020	20w	5000K	2,000 Lm	C1D2, C2D2	120v / 277v	-65°C to +85°C (185°F)	T3B, T5	IP67
HTR5-020	20w	5000K	2,000 Lm	C1D2, C2D2	480v	-65°C to +85°C (185°F)	T3B, T5	IP67

**THE Sentinel**

16" dia. x 13.4" h




**The Sentinel**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJCR1L-060	60w	4K / 5K	8,400 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66
HJCR1L-08	80w	4K / 5K	11,200 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66
HJCR1L-100	100w	4K / 5K	14,000 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66
HJCR1L-120	120w	4K / 5K	16,200 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66
HJCR1L-150	150w	4K / 5K	20,250 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66
HJCR1L-180	180w	4K / 5K	24,300 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66
HJCR1L-200	200w	4K / 5K	27,000 Lm	C1D1, C1D2, C2D1, C2D2	120v / 277v / 347v / 480v	-40°C to +60°C (140°F)	T4	IP66

**THE Chieftain**

15" dia. x 9.1" h  
12.6" dia. x 9.4" h  
10.4" dia. x 6.3" h




**The Chieftain**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJER1M-040	40w	4K / 5K	5,600 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJER1M-060	60w	4K / 5K	8,400 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJER1M-080	80w	4K / 5K	11,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJER1M-100	100w	4K / 5K	14,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJER1M-120	120w	4K / 5K	16,800 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJER1M-150	150w	4K / 5K	21,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66

**THE Aviator**

11.5" dia. x 16.1" h



**The Aviator**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJFR1S-060	60w	4K / 5K	8,400 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJFR1S-080	80w	4K / 5K	11,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66
HJFR1S-100	100w	4K / 5K	13,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +65°C (149°F)	T4	IP66

**THE Foreman**

9.2" dia. x 9" h  
10.6" dia. x 6.5" h



**The Foreman**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJBR2-020	20w	4K / 5K	2,800 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +50°C (122°F)	T3	IP66
HJBR2-040	40w	4K / 5K	5,600 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +50°C (122°F)	T3	IP66
HJBR2-060	60w	4K / 5K	8,400 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +50°C (122°F)	T3	IP66
HJBR2-080	80w	4K / 5K	11,200 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +50°C (122°F)	T3	IP66

**THE Pilot**

6.8" dia. x 16.1" h



**The Pilot**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJGJJ1-010	10w	4K / 5K	1,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T4	IP66
HJGJJ1-020	20w	4K / 5K	2,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T4	IP66
HJGJJ1-030	30w	4K / 5K	3,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T4	IP66
HJGJJ1-040	40w	4K / 5K	4,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T4	IP66

**THE Dominator**

15.7" w x 11.3" h  
11.6" w x 11.6" h



**The Dominator**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJDS1-060	60w	4K / 5K	8,400 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +45°C (113°F)	T4	IP66
HJDS1-080	80w	4K / 5K	11,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +45°C (113°F)	T4	IP66
HJDS1-100	100w	4K / 5K	14,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +45°C (113°F)	T4	IP66
HJDS1-120	120w	4K / 5K	16,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +45°C (113°F)	T4	IP66
HJDS1-150	150w	4K / 5K	21,000 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +45°C (113°F)	T4	IP66
HJDS1-180	180w	4K / 5K	25,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +45°C (113°F)	T4	IP66

**THE Warden 16**

16" w x 16" h



**The Warden 16**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HCS16-120	120w	5K	13,800 Lm	C1D2	120v-277v	-40°C to +50°C (122°F)	T5	IP67
HCS16-150	150w	5K	17,250 Lm	C1D2	120v-277v	-40°C to +50°C (122°F)	T5	IP67
HCS16-180	180w	5K	21,300 Lm	C1D2	120v-277v	-40°C to +50°C (122°F)	T5	IP67

**THE Warden 12**

12" w x 12" h



**The Warden 12**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HCS12-060	60w	5K	6,900 Lm	C1D2	120v-277v / 347-480v	-40°C to +50°C (122°F)	T5	IP67
HCS12-080	80w	5K	9,200 Lm	C1D2	120v-277v / 347-480v	-40°C to +50°C (122°F)	T5	IP67
HCS12-100	100w	5K	11,500 Lm	C1D2	120v-277v / 347-480v	-40°C to +50°C (122°F)	T5	IP67

**THE Warden 8**

8" w x 8" h



**The Warden 8**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HCS8-020	20w	5K	2,300 Lm	C1D2	120v-277v	-40°C to +50°C (122°F)	T5	IP67
HCS8-030	30w	5K	3,450 Lm	C1D2	120v-277v	-40°C to +50°C (122°F)	T5	IP67
HCS8-040	40w	5K	4,600 Lm	C1D2	120v-277v	-40°C to +50°C (122°F)	T5	IP67

**THE Patroller**

15" w x 9.1" h  
12.6" w x 9.4" h  
10.4" w x 6.3" h



**The Patroller**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJAS2-040	40w	4K-5K	5,600 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +40°C (104°F)	T3	
HJAS2-060	60w	4K-5K	8,400 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +40°C (104°F)	T3	
HJAS2-080	80w	4K-5K	11,200 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +40°C (104°F)	T3	
HJAS2-100	100w	4K-5K	14,000 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +40°C (104°F)	T3	
HJAS2-120	120w	4K-5K	16,800 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +40°C (104°F)	T3	

**THE Attendant**

10.45" w x 5.12" h



**The Attendant**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTRT-040	40w	5K	4,000 Lm	C1D2	120v / 277v / 480v	-65°C to +85°C (185°F)	T4	IP67

**FLOOD**  
explosion-proof

THE **Navigator**



25.6" w x 10.25" h

**The Navigator**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HCCH-080	80w	6K	8,000 Lm	C1D2	100-305v	-40°C to +50°C (122°F)	T5	IP67
HCCH-080	80w	4K	8,000 Lm	C1D2	100-305v	-40°C to +50°C (122°F)	T5	IP67
HCCH-080	80w	3K	8,000 Lm	C1D2	100-305v	-40°C to +50°C (122°F)	T5	IP67

**LINEAR**  
explosion-proof

THE **Steward 2ft**



24" w x 5.5" d x 8.1" h

**The Steward 2**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJIL21-030	30w	4K-5K	4,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJIL21-040	40w	4K-5K	5,600 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Steward 4ft**




47.5" w x 5.5" d x 8.1" h

**The Steward 4**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJIL41-040	40w	4K-5K	5,600 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJIL41-060	60ws	4K-5K	8,400 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJIL41-080	80w	4K-5K	11,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Flyer 2ft**



24" w x 4.7" d x 9.5" h

**The Flyer 2**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJHL22-010	10w	4K-5K	1,400 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJHL22-020	20w	4K-5K	2,800 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Flyer 4ft**



47" w x 4.7" d x 9.5" h

**The Flyer 4**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJHL42-040	40w	4K-5K	5,600 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJHL42-050	50w	4K-5K	7,000 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJHL42-060	60w	4K-5K	8,100 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Curator 2ft**




23.6" w x 5.3" d x 3.3" h

**The Curator 2**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HKL2-036	36w	3K-4K-5K	4,000 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-048	48w	3K-4K-5K	5,400 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-056	56w	3K-4K-5K	6,300 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66

THE **Curator 4ft**



47.2" w x 5.3" d x 3.3" h

**The Curator 4**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HKL4-036	36w	3K-4K-5K	4,000 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-048	48w	3K-4K-5K	5,400 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-056	56w	3K-4K-5K	6,300 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-072	72w	3K-4K-5K	8,100 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-100	100w	3K-4K-5K	10,900 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66

THE **Mariner 4**



49" w x 4" d x 7" h

**The Mariner 4**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HQH4-126	126w	5K	16,287 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH4-152	152w	5K	19,773 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66

THE **Mariner 2**



24.25" w x 4" d x 7" h

**The Mariner 2**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HQH2-058	58w	5K	7,309 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH2-077	77w	5K	10,264 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66

THE **Mariner 1**




12.2" w x 4" d x 7" h

**The Mariner 1**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HQH1-026	26w	5K Open Face	3,332 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH1-043	26w	5K Open Face	5,538 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH1C-026	26w	5K Horz Hood	3,126 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH1C-043	26w	5K Horz Hood	4,879 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQV1C-026	26w	5K Vert Hood	3,305 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQV1C-043	26w	5K Vert Hood	5,292 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66

THE **Keeper**



25.85" w x 4.13" d x 6.46" h

**The Keeper**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTL2-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP68

THE **Keeper 2**



23.15" w x 6.93" d x 6.5" h

**The Keeper 2**

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTL22-040	40w	5K	4,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP68
HTL22-060	60w	5K	6,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP68

**SPECIALTY**  
explosion-proof

THE **Director**

14.5" w x 3.5" d x 12.7" h



**The Director** (High Visibility Lighted Exit Sign)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HEL10-010	8w	---	---	C1D2	120v-277v	-65°C to +120°C (248°F)	T4A	IP68

THE **Curator Exit**

23.6" w x 3.3" d x 5.3" h



**The Curator Exit** (High Visibility Lighted Exit Sign)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HKL2-036	36w	6K	---	C1D2, C2D2	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-048	48w	6K	---	C1D2, C2D2	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-056	56w	6K	---	C1D2, C2D2	120v-277v	-40°C to +55°C (131°F)	T6	IP66

THE **Guide**


15.59" w x 4.5" d x 18.5" h



**The Guide** (High Visibility Lighted Exit Sign)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJJES-003	3w	---	---	C1D1, C1D2, C2D1, C2D2	100v-277v	10°C to +55°C (131°F)	T3C	IP66
HJJES-00	7w	---	---	C1D1, C1D2, C2D1, C2D2	100v-277v	10°C to +55°C (131°F)	T3C	IP66
HJJES-011	11w	---	---	C1D1, C1D2, C2D1, C2D2	100v-277v	10°C to +55°C (131°F)	T3C	IP66

THE **Finisher 1by**




1' x 2' & 1' x 4' Troffer Lay-In

The **Finisher 1by** (Low Profile Paint Booth Design)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HXP12-050	50w	5600K	6,250 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP14-100	100w	5600K	11,666 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67

THE **Finisher 2by2**

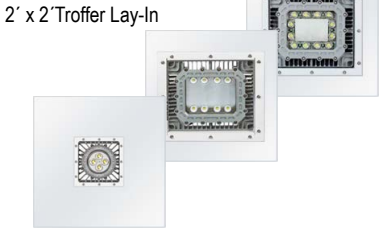

2' x 2' Troffer Lay-In

The **Finisher 2by2** (Low Profile Paint Booth Design)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HXP22-050	50w	5600K	6,250 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP22-100	100w	5600K	12,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP22-150	150w	5600K	17,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67

THE **Finisher 2by4**



2' x 4' Troffer Lay-In

The **Finisher 2by4** (Low Profile Paint Booth Design)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HXP24-100	100w	5600K	12,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP24-150	150w	5600K	17,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP24-200	200w	5600K	23,333 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67

RETROFIT  
explosion-proof  
RETROFIT

THE **Guard Retrofit**



10.95" dia.

The **Guard Retrofit C series** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR11C2-120	120w	5K	12,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +100°C (212°F)	T3C	IP67
HTR11C2-120	120w	5K	12,000 Lm	C1D2, C2D2	480v	-65°C to +85°C (185°F)	T4A	IP67
HTR11C2-140	140w	5K	14,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR11C2-140	140w	5K	14,000 Lm	C1D2, C2D2	480v	-65°C to +65°C (149°F)	T4A	IP67

THE **Monitor Retrofit**



9.21" dia.

The **Monitor Retrofit C series** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR91C-060	60w	5K	6,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR91C-060	60w	5K	6,000 Lm	C1D1, C2D1	480v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	5K	8,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	5K	8,000 Lm	C1D1, C2D1	480v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	5K	10,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	5K	10,000 Lm	C1D1, C2D1	480v	-65°C to +55°C (131°F)	T4	IP67
HTR92C-060	60w	5K	6,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR92C-060	60w	5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	5K	8,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	5K	8,000 Lm	C1D2	480v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	5K	10,000 Lm	C1D2	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	5K	10,000 Lm	C1D2	480v	-65°C to +55°C (131°F)	T4	IP67

THE **Lookout Retrofit**



7.25" dia.

The **Lookout Retrofit C series** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR7C1-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-060	60w	5K	6,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	5K	6,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	5K	6,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-040	40w	5K	4,000 Lm	C1D2	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	5K	4,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	5K	4,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	5K	6,000 Lm	C1D2	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	5K	6,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67

THE **Scout S Retrofit**



THE **Scout M Retrofit**



7.55" dia.

The **Scout Retrofit** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTJS-020	20w	5K	2,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJS-020-R	20w	Red		C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJS-020-G	20w	Green		C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-040	40w	5K	4,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-050	50w	5K	5,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-070	70w	5K	7,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C, T4A	IP67
HTJM-080	80w	5K	8,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C, T4A	IP67
HTJM-080	80w	5K	8,000 Lm	C1D2, C2D1	480v	-65°C to +65°C (149°F)	T3C, T4A	IP67

Specifications and data are subject to change without notice.