

HAZARDOUS LOCATION

LED lighting equipment at-a-glance

SOLAS RAY™ LIGHTING


LED hazardous LOCATION lighting EQUIPMENT

- To access product specific web page, cut sheet, ies files and other information click on product image.
- Detailed information, all mounting possibilities and other options can be found on the products cut sheet.
- Higher temperature demands may have an affect on warranty, see website for warranty information.
- Specifications, upgrades and data are subject to change without notice.

5935 West 84th St. | Indianapolis, IN 46278 | P: 765.298.8030 | www.SolasRay.com

ROUND
explosion-proof

THE Beast




20" dia. x 9" h

The HazLoc Beast

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HH18-170	170w	5K	19,500 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HH22-215	219w	5K	24,055 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HH32-368	383w	5K	39,647 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HH40-419	420w	5K	45,700 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66

THE mini Beast



14" dia. x 4.2" h

The HazLoc mini Beast

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HL06-055	53w	5K	6,061 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HL12-104	106w	5K	13,011 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66
HL16-170	166w	5K	19,058 Lm	C1D2, C2D2	120v-277v / 347-480v	-40°C to +65°C (149°F)	T5	IP66

THE Boss




16.14" dia. x 8.5" h

The Boss

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR16C-140	140w	3K / 5K	14,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-140	140w	3K / 5K	14,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-160	160w	3K / 5K	16,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-160	160w	3K / 5K	16,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-180	180w	3K / 5K	18,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T5, T4, T4A	IP67
HTR16C-180	180w	3K / 5K	18,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-200	200w	3K / 5K	20,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-200	200w	3K / 5K	20,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-220	220w	3K / 5K	22,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T5, T4, T4A	IP67
HTR16C-220	220w	3K / 5K	22,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +65°C (149°F)	T5, T4, T4A	IP67
HTR16C-240	240w	3K / 5K	24,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +55°C (131°F)	T5, T4, T4A	IP67
HTR16C-240	240w	3K / 5K	24,000 Lm	C1D1, C1D2, C2D1	347v / 480v	-65°C to +55°C (131°F)	T5, T4, T4A	IP67

THE Guard S series



10.95" dia. x 9.6" h

The Guard S series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR11S1-120	120w	3K / 5K	12,000 Lm	C1D1, C2D1	120v or 277v	-65°C to +85°C (185°F)	T5	IP67
HTR11S1-140	140w	3K / 5K	14,000 Lm	C1D1, C2D1	120v or 277v	-65°C to +65°C (149°F)	T5	IP67
HTR11S1-150	150w	3K / 5K	15,000 Lm	C1D1, C2D1	120v or 277v	-65°C to +65°C (149°F)	T5	IP67
HTR11S2-120	120w	3K / 5K	12,000 Lm	C1D2	120v or 277v	-65°C to +85°C (185°F)	T4A	IP67
HTR11S2-140	140w	3K / 5K	14,000 Lm	C1D2	120v or 277v	-65°C to +85°C (185°F)	T4A	IP67
HTR11S2-150	150w	3K / 5K	15,000 Lm	C1D2	120v or 277v	-65°C to +65°C (149°F)	T4A	IP67

THE Guard C series



10.95" dia. x 9.6" h

The Guard C series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR11C2-120	120w	3K / 5K	12,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +100°C (212°F)	T3C	IP67
HTR11C2-120	120w	3K / 5K	12,000 Lm	C1D2, C2D2	480v	-65°C to +85°C (185°F)	T4A	IP67
HTR11C2-140	140w	3K / 5K	14,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR11C2-140	140w	3K / 5K	14,000 Lm	C1D2, C2D2	480v	-65°C to +65°C (149°F)	T4A	IP67

THE Monitor S series



9.21" dia. x 7.61" h

The Monitor S series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR92S-065	65w	3K / 5K	6,500 Lm	C1D2, C2D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR92S-075	75w	3K / 5K	7,500 Lm	C1D2, C2D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR92S-095	95w	3K / 5K	9,500 Lm	C1D2, C2D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67

THE Monitor C series



9.21" dia. x 7.61" h

The Monitor C series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR91C-060	60w	3K / 5K	6,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR91C-060	60w	3K / 5K	6,000 Lm	C1D1, C2D1	480v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	3K / 5K	8,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	3K / 5K	8,000 Lm	C1D1, C2D1	480v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	3K / 5K	10,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	3K / 5K	10,000 Lm	C1D1, C2D1	480v	-65°C to +55°C (131°F)	T4	IP67
HTR92C-060	60w	3K / 5K	6,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR92C-060	60w	3K / 5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	3K / 5K	8,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	3K / 5K	8,000 Lm	C1D2	480v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	3K / 5K	10,000 Lm	C1D2	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	3K / 5K	10,000 Lm	C1D2	480v	-65°C to +55°C (131°F)	T4	IP67

THE Lookout S series



7.25" dia. x 6.21" h

The Lookout S series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR7S1-040	40w	3K / 5K	4,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR7S1-060	60w	3K / 5K	6,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C	IP67
HTR7S2-040	40w	3K / 5K	4,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR7S2-060	60w	3K / 5K	6,000 Lm	C1D2	120v / 277v	-65°C to +65°C (149°F)	T3C	IP67

THE Lookout C series




7.25" dia. x 6.21" h

The Lookout C series

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR7C1-040	40w	3K / 5K	4,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	3K / 5K	4,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	3K / 5K	4,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-060	60w	3K / 5K	6,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	3K / 5K	6,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	3K / 5K	6,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-040	40w	3K / 5K	4,000 Lm	C1D2	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	3K / 5K	4,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	3K / 5K	4,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	3K / 5K	6,000 Lm	C1D2	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	3K / 5K	6,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	3K / 5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67

FLOOD
explosion-proof

THE **Navigator**

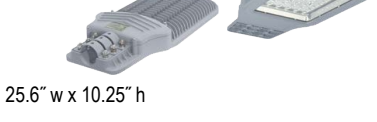

25.6" w x 10.25" h

The Navigator

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HCCH-080	80w	6K	8,000 Lm	C1D2	100-305v	-40°C to +50°C (122°F)	T5	IP67
HCCH-080	80w	4K	8,000 Lm	C1D2	100-305v	-40°C to +50°C (122°F)	T5	IP67
HCCH-080	80w	3K	8,000 Lm	C1D2	100-305v	-40°C to +50°C (122°F)	T5	IP67

LINEAR
explosion-proof

THE **Steward 2ft**



24" w x 5.5" d x 8.1" h

The Steward 2

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJIL21-030	30w	4K-5K	4,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJIL21-040	40w	4K-5K	5,600 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Steward 4ft**




47.5" w x 5.5" d x 8.1" h

The Steward 4

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJIL41-040	40w	4K-5K	5,600 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJIL41-060	60ws	4K-5K	8,400 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJIL41-080	80w	4K-5K	11,200 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Flyer 2ft**



24" w x 4.7" d x 9.5" h

The Flyer 2

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJHL22-010	10w	4K-5K	1,400 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJHL22-020	20w	4K-5K	2,800 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Flyer 4ft**



47" w x 4.7" d x 9.5" h

The Flyer 4

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJHL42-040	40w	4K-5K	5,600 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJHL42-050	50w	4K-5K	7,000 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66
HJHL42-060	60w	4K-5K	8,100 Lm	C1D2, C2D1, C2D2	100v-277v / 200-480v	-40°C to +60°C (140°F)	T4	IP66

THE **Curator 2ft**




23.6" w x 5.3" d x 3.3" h

The Curator 2

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HKL2-036	36w	3K-4K-5K	4,000 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-048	48w	3K-4K-5K	5,400 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-056	56w	3K-4K-5K	6,300 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66

THE **Curator 4ft**



47.2" w x 5.3" d x 3.3" h

The Curator 4

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HKL4-036	36w	3K-4K-5K	4,000 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-048	48w	3K-4K-5K	5,400 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-056	56w	3K-4K-5K	6,300 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-072	72w	3K-4K-5K	8,100 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL4-100	100w	3K-4K-5K	10,900 Lm	C1D2, C2D1	120v-277v	-40°C to +55°C (131°F)	T6	IP66

THE **Mariner 4**



49" w x 4" d x 7" h

The Mariner 4

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HQH4-126	126w	5K	16,287 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH4-152	152w	5K	19,773 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66

THE **Mariner 2**



24.25" w x 4" d x 7" h

The Mariner 2

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HQH2-058	58w	5K	7,309 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH2-077	77w	5K	10,264 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66

THE **Mariner 1**




12.2" w x 4" d x 7" h

The Mariner 1

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HQH1-026	26w	5K Open Face	3,332 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH1-043	26w	5K Open Face	5,538 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH1C-026	26w	5K Horz Hood	3,126 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQH1C-043	26w	5K Horz Hood	4,879 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQV1C-026	26w	5K Vert Hood	3,305 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66
HQV1C-043	26w	5K Vert Hood	5,292 Lm	C1D2	120v-277v / 347-480v	-40°C to +40°C (104°F)	T4	IP66

THE **Keeper**



25.85" w x 4.13" d x 6.46" h

The Keeper

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTL2-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP68

THE **Keeper 2**



23.15" w x 6.93" d x 6.5" h

The Keeper 2

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTL22-040	40w	5K	4,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP68
HTL22-060	60w	5K	6,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP68

SPECIALTY
explosion-proof

THE **Director**

14.5" w x 3.5" d x 12.7" h



The Director (High Visibility Lighted Exit Sign)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HEL10-010	8w	---	---	C1D2	120v-277v	-65°C to +120°C (248°F)	T4A	IP68

THE **Curator Exit**

23.6" w x 3.3" d x 5.3" h



The Curator Exit (High Visibility Lighted Exit Sign)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HKL2-036	36w	6K	---	C1D2, C2D2	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-048	48w	6K	---	C1D2, C2D2	120v-277v	-40°C to +55°C (131°F)	T6	IP66
HKL2-056	56w	6K	---	C1D2, C2D2	120v-277v	-40°C to +55°C (131°F)	T6	IP66

THE **Guide**


15.59" w x 4.5" d x 18.5" h



The Guide (High Visibility Lighted Exit Sign)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HJJES-003	3w	---	---	C1D1, C1D2, C2D1, C2D2	100v-277v	10°C to +55°C (131°F)	T3C	IP66
HJJES-00	7w	---	---	C1D1, C1D2, C2D1, C2D2	100v-277v	10°C to +55°C (131°F)	T3C	IP66
HJJES-011	11w	---	---	C1D1, C1D2, C2D1, C2D2	100v-277v	10°C to +55°C (131°F)	T3C	IP66

THE **Finisher 1by**




1' x 2' & 1' x 4' Troffer Lay-In

The **Finisher 1by** (Low Profile Paint Booth Design)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HXP12-050	50w	5600K	6,250 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP14-100	100w	5600K	11,666 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67

THE **Finisher 2by2**

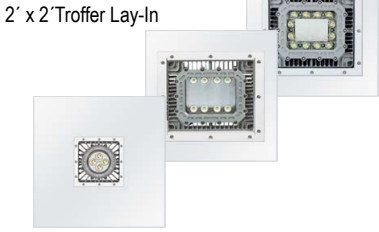

2' x 2' Troffer Lay-In

The **Finisher 2by2** (Low Profile Paint Booth Design)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HXP22-050	50w	5600K	6,250 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP22-100	100w	5600K	12,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP22-150	150w	5600K	17,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67

THE **Finisher 2by4**



2' x 4' Troffer Lay-In

The **Finisher 2by4** (Low Profile Paint Booth Design)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HXP24-100	100w	5600K	12,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP24-150	150w	5600K	17,500 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67
HXP24-200	200w	5600K	23,333 Lm	C1D1, C1D2, C2D1, C2D2	100v-277v	-40°C to +65°C (149°F)	T5	IP67

RETROFIT

THE **Guard Retrofit**



10.95" dia.

The **Guard Retrofit C series** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR11C2-120	120w	5K	12,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +100°C (212°F)	T3C	IP67
HTR11C2-120	120w	5K	12,000 Lm	C1D2, C2D2	480v	-65°C to +85°C (185°F)	T4A	IP67
HTR11C2-140	140w	5K	14,000 Lm	C1D2, C2D2	120v or 277v	-65°C to +85°C (185°F)	T3C	IP67
HTR11C2-140	140w	5K	14,000 Lm	C1D2, C2D2	480v	-65°C to +65°C (149°F)	T4A	IP67

THE **Monitor Retrofit**



9.21" dia.

The **Monitor Retrofit C series** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR91C-060	60w	5K	6,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR91C-060	60w	5K	6,000 Lm	C1D1, C2D1	480v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	5K	8,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR91C-080	80w	5K	8,000 Lm	C1D1, C2D1	480v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	5K	10,000 Lm	C1D1, C2D1	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR91C-100	100w	5K	10,000 Lm	C1D1, C2D1	480v	-65°C to +55°C (131°F)	T4	IP67
HTR92C-060	60w	5K	6,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4	IP67
HTR92C-060	60w	5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	5K	8,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4	IP67
HTR92C-080	80w	5K	8,000 Lm	C1D2	480v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	5K	10,000 Lm	C1D2	120v / 277v	-65°C to +65°C (149°F)	T4	IP67
HTR92C-100	100w	5K	10,000 Lm	C1D2	480v	-65°C to +55°C (131°F)	T4	IP67

THE **Lookout Retrofit**



7.25" dia.

The **Lookout Retrofit C series** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTR7C1-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-040	40w	5K	4,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C1-060	60w	5K	6,000 Lm	C1D1, C1D2, C2D1	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	5K	6,000 Lm	C1D1, C1D2, C2D1	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C1-060	60w	5K	6,000 Lm	C1D1, C1D2, C2D1	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-040	40w	5K	4,000 Lm	C1D2	24v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	5K	4,000 Lm	C1D2	120v / 277v	-65°C to +100°C (212°F)	T4, T6	IP67
HTR7C2-040	40w	5K	4,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	5K	6,000 Lm	C1D2	24v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	5K	6,000 Lm	C1D2	120v / 277v	-65°C to +85°C (185°F)	T4, T6	IP67
HTR7C2-060	60w	5K	6,000 Lm	C1D2	480v	-65°C to +85°C (185°F)	T4, T6	IP67

THE **Scout S Retrofit**



THE **Scout M Retrofit**



7.55" dia.

The **Scout Retrofit** (Retrofits Appleton mercmaster III, Eaton Crouse-Hinds & Hubbell Certilite / Certilite V)

Model #	Wattage	Kelvin	Lumens	Class / Division	Voltage	Ambient Temperature	T-Rating	IP Rating
HTJS-020	20w	5K	2,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJS-020-R	20w	Red		C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJS-020-G	20w	Green		C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-040	40w	5K	4,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-050	50w	5K	5,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +100°C (212°F)	T3C, T4A	IP67
HTJM-070	70w	5K	7,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C, T4A	IP67
HTJM-080	80w	5K	8,000 Lm	C1D2, C2D1	120v / 277v	-65°C to +65°C (149°F)	T3C, T4A	IP67
HTJM-080	80w	5K	8,000 Lm	C1D2, C2D1	480v	-65°C to +65°C (149°F)	T3C, T4A	IP67

Specifications and data are subject to change without notice.