


**FEATURES**

- Overlay and stainless steel model options.
- Undercounter design allows for dual installation with undercounter unit.
- Full-view, UV-resistant glass door—high altitude glass available.
- Individual temperature control of two separate compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Temperature zones from 40°F to 65°F.
- Illuminated touch control panel.
- Discreet interior lighting.
- Wine shelves accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine shelves with natural cherrywood facing have three-quarter extension for easy access.
- Home security system connection.
- Star-K compliant with installation of a harness kit.



Model 424G

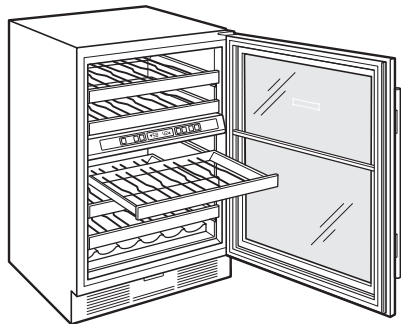

MODEL OPTIONS	
Overlay	424G/O
Stainless (tubular handle)	424G/S/TH
Stainless (pro handle)	424G/S/PH

*Specify RH or LH door.*

**ACCESSORIES**

- Stainless steel tubular and pro handles.
- Solid overlay door.
- Door lock.
- Dual installation kit.
- Stainless steel or black dual wide kickplate.

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

**ENEMIES OF WINE**

**Heat.** Two independent storage zones can be set in a range of 40°F to 65°F, with one-degree digital accuracy.

**Light.** UV-resistant, bronze-tinted glass shields wines from harmful rays.

**Humidity.** Dual evaporators, one for each storage zone, maintain steady, moderate humidity.

**Vibration.** Sub-Zero’s quiet compressor allows wine to rest undisturbed. Shelves glide out smoothly, providing access without agitating the wine.





Wine shelf arrangement.

SPECIFICATIONS	
<b>PRODUCT</b>	
Dimensions	23 <sup>7</sup> / <sub>8</sub> "W x 34"H x 24"D
Door Clearance	25 <sup>3</sup> / <sub>8</sub> "
Weight	195 lb
<b>CAPACITY</b>	
Wine Storage	46 bottles (750 ml)
<b>ELECTRICAL</b>	
Supply	115 VAC, 60 Hz
Service	15 amp circuit

Specifications are subject to change without notice. Visit [subzero.com/specs](http://subzero.com/specs) for the most up-to-date information.


Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

**DIMENSIONS**

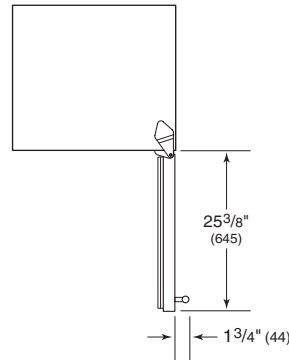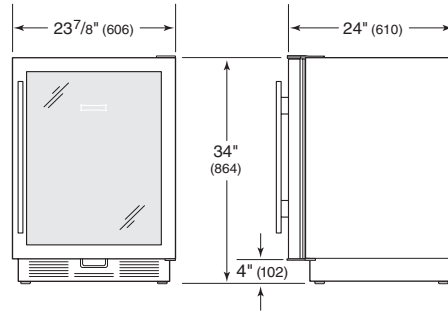

Dimensions based on stainless steel model.

**ELECTRICAL**



**INSTALLATION**

