



# BUNKER TYPICAL DETAIL


713 STIMMEL RD.  
COLUMBUS OH 43223  
1-800-465-0900  
WWW.SITEFABRIC.COM



**SITE SUPPLY, INC.**  
STABILIZATION, DRAINAGE & EROSION CONTROL MATERIALS


## PLAN VIEW

PATENT PENDING

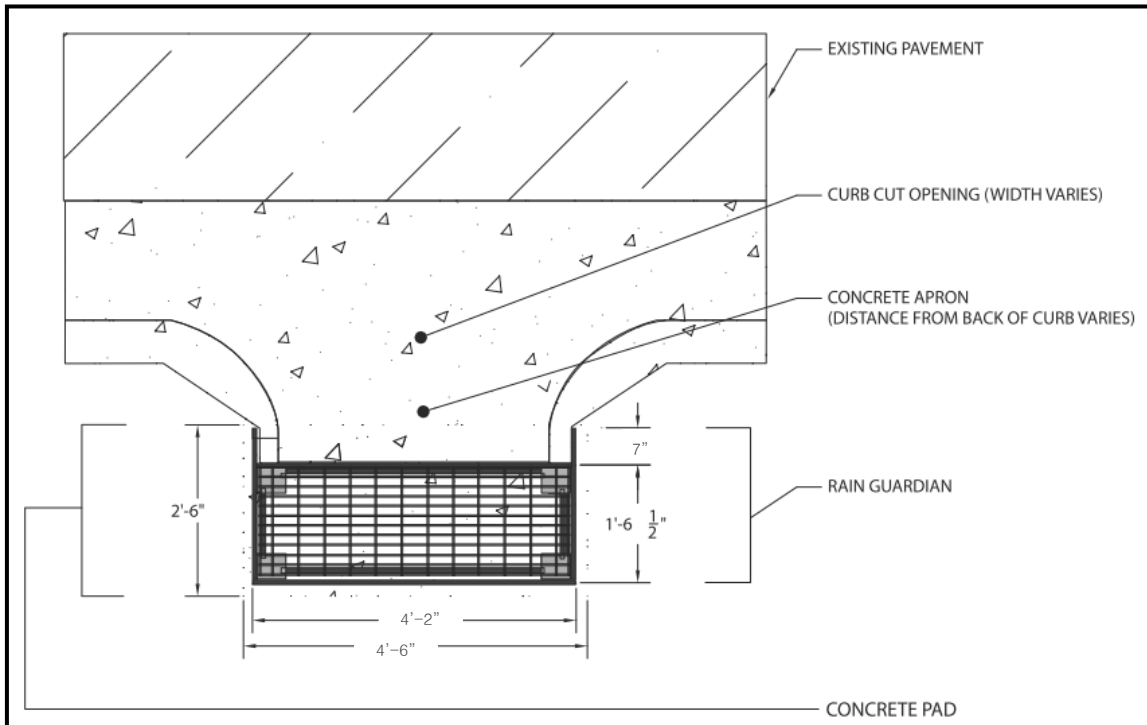

## CROSS-SECTION VIEW

PATENT PENDING

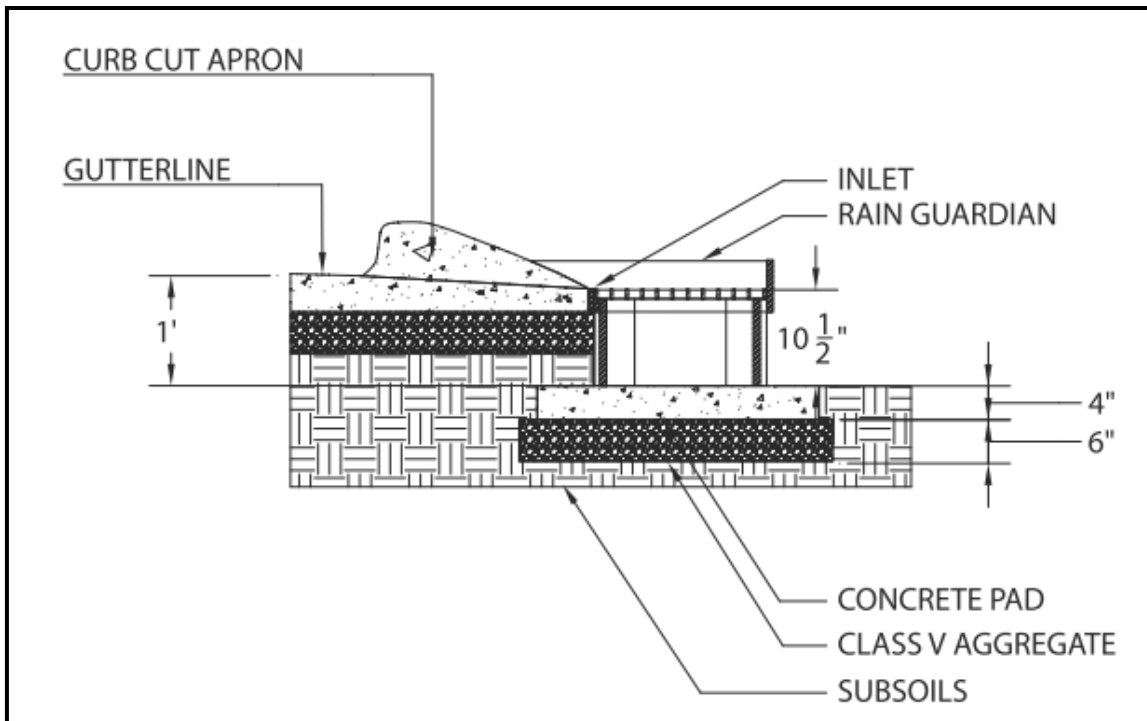

SLAB DIMENSIONS, DISTANCE FROM CURB, AND CHAMBER ELEVATION MAY VARY WITH SITE CONDITIONS. THE TOP OF THE METAL GRATE, HOWEVER, SHOULD BE 1.5" - 2" BELOW THE OVERFLOW ELEVATION AND THE CONCRETE SLAB SHOULD EXTEND WELL BEYOND THE FILTER WALL TO SERVE AS A SPLASH DISSIPATER.

GALVANIZED STEEL GRATE (1-PIECE)

ANODIZED ALUMINUM AND FIBERGLASS FILTER ASSEMBLY

COMPOSITE CHAMBER

