




NATELA-WW440119

10W LINEAR WALL WASHER (500mm)

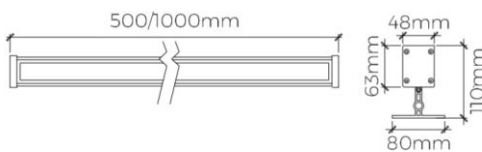

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminium	LED Chip	CREE
Fixture Finish	Powder-coated Gray	Power Consumption	10W
Glass	High intensity Tempered Glass	Input Voltage	24VDC. Also available in 180-250VAC 50/60Hz
Optic	Acrylic Optical lens	Length	500mm. Also available in 1000mm
Driver	Built-in	Operating Temperature	from -20° to 65° C
Binning	3 Step MacAdam	Color Rendering Index	>85
Input Wiring	1 Meter of 2 core 0.75mm ² rubber cable	Driver Protection	Short circuit
RGB Signal Wiring	1 Meter of 3 core 0.75mm ² rubber cable	Warranty	3 years against manufacturing defects
Life Span	50,000 hours	Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
10W	2700K 3000K 4000K 6000K RGB	110lm/W	120lm/W	130lm/W	66	10° 20° 35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.