

SUPRADRY ELITE 2.0


High Output Linear LED "Vapour Tight"

CSA, cUL, cETL, or equal

Project Reference: _____ Fixture Type: _____ Cat. No.: _____ Voltage: _____ Options: _____



Shown with frosted lens

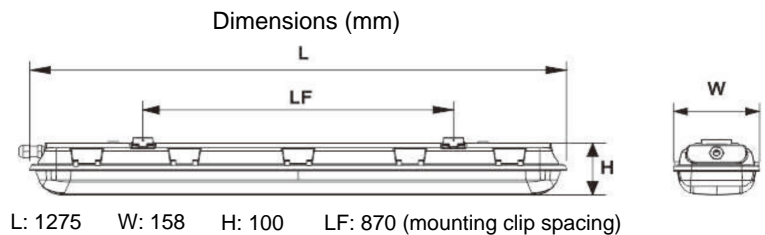

SPECIFICATIONS

- Ideal luminaire for industrial and commercial use (12' to 25' height)
- Shatter resistant and UV stabilized polycarbonate lens in clear or frosted
- Weather and dust proof – IP66 gasketed
- Easy maintenance – simply wipe off
- Instant-on, -25°C to +40°C environmental temperature range
- High colour rendering provides better vision
- Rigid fibreglass housing with heavy duty silicone rubber gasket poured in
- SAE 316 stainless steel lens holding clips
- Field replaceable Philips LED engines and drivers
- 0-10V dimmable

PHILIPS

ORDERING INFORMATION

| Product Code | Wattage | Lumens | CCT | CRI |
|--------------------------|---------|-----------|-------|-----|
| 1X4MP-LED100-CW-UNV-___* | 103W | 13,256 lm | 5000K | >83 |

* Use "CL" for clear lens or "FL for frosted lens

OPTIONS/ACCESSORIES

| Product Code | Description |
|--------------|---|
| NW | For 4000K option, replace "CW" in product code above with "NW" |
| 347 | Standard is 120-277V; for 347V option, replace "UNV" in product code above with "347" |
| -SR | Add "- SR" to product code above for internal microwave occupancy sensor with on/off and optional photocell control |
| OSFHU-1TW | Leviton passive infrared occupancy sensor 120-347V (external, mounted at one end) |
| WHYTG-10 | 10' aircraft cable quick hanging kit |