

SUPRADRY ELITE


LED Vapourtight with Linear LEDs

CSA, cUL, cETL, or equal

Project Reference: _____ Fixture Type: ___ Cat. No.: _____ Voltage: _____ Options: _____



Shown with frosted lens

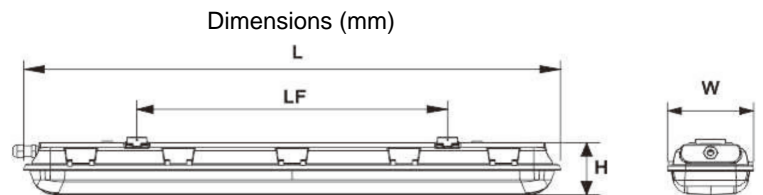

Model	L (mm)	W (mm)	H (mm)	LF (mm)
1X4MP	1275	158	100	870 (mounting clip spacing)
1X2MP	660	158	100	384



SPECIFICATIONS

- Ideal luminaire for industrial use and parking garages (7-16' ceilings)
- Shatter resistant and UV stabilized polycarbonate lens in clear or frosted
- Weather and dust proof – IP66 gasketed
- Easy maintenance – simply wipe off
- Instant-on, -25°C to +40°C environmental temperature range
- High colour rendering provides better vision
- Rigid fibreglass housing with heavy duty silicone rubber gasket poured in
- SAE 316 stainless steel lens holding clips
- Field replaceable Philips LED engines and drivers
- 0-10V dimmable

PHILIPS

ORDERING INFORMATION

Product Code	Wattage	Lumens	CCT	CRI
1X4MP-LED30-CW-UNV-__ __ *	30W	3573 lm	5000K	>83
1X4MP-LED45-CW-UNV-__ __ *	45W	4948 lm	5000K	>83
1X4MP-LED60-CW-UNV-__ __ *	56W	6263 lm	5000K	>83
NEW: 2' version, also available in 4000K and 347V (not DLC)				
1X2MP-LED30-CW-UNV-__ __ *	29W	3480 lm	5000K	>83

* Use "CL" for clear lens or "FL" for frosted lens

OPTIONS/ACCESSORIES

Product Code	Description
NW	For 4000K option, replace "CW" in product code above with "NW"
347	Standard is 120-277V; for 347V option, replace "UNV" in product code above with "347"
-SR	Add "- SR" to product code above for internal microwave occupancy sensor with on/off and optional photocell control
OSFHU-1TW	Leviton passive infrared occupancy sensor 120-347V (external, mounted at one end)
WHYTG-10	10' aircraft cable quick hanging kit

To Order:
 Phone: 1-800-495-2677
 Email: svc@vllightingsolutions.com

1628187 Ontario Ltd.
 1738 Orangebrook Crt., Unit 13
 Pickering, ON L1W 3G8 Canada