

**VL-CR series**

**LED Running Man Exit Signs**

CSA, cUL, cETL, or equal

Project Reference: \_\_\_\_\_ Fixture Type: \_\_\_\_\_ Cat. No.: \_\_\_\_\_ Voltage: \_\_\_\_\_ Options: \_\_\_\_\_




VL-CR-7008M




VL-CR-7020B



VL-CR-7020A

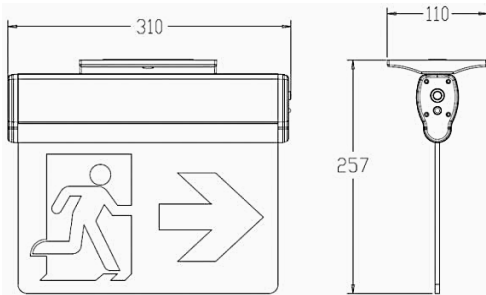

dimensions in mm

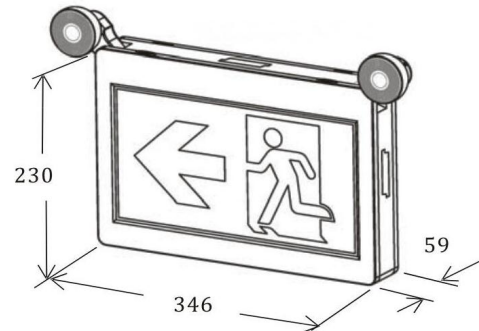

- Universal configuration: single or double sided with reversible pictograms included
- Universal mounting: wall, side or ceiling
- Input Voltage: 120/347VAC 60HZ
- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Super bright SMD LED
- Nickel Cadmium Battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: >90minutes
- Conversion time: <0.2second
- IP Class: IP20
- Operating Temperature: 0°C - 40°C

Pictograms included (reversible):



2 pcs. with arrow



1 pc. without arrow

**ORDERING INFORMATION**

Product Code	Input	Total Power	Battery Backup	Net weight
VL-CR-7008M	120/347VAC	2W	> 90 minutes	1.05 kg
VL-CR-7020A	120/347VAC	5W	> 90 minutes	1.77 kg
VL-CR-7020B	120/347VAC	3W	> 90 minutes	1.63 kg