



VLST series
Linear LED Strip

CSA, cUL, cETL, or equal

Project Reference: _____ Fixture Type: _____ Cat. No: _____ Voltage: _____ Options: _____



Depth: 71mm / 2.8"

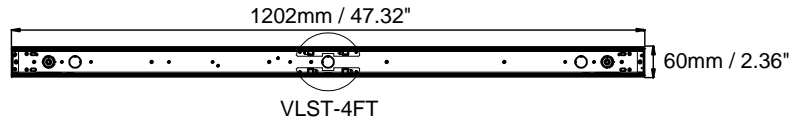

- Surface mount and V-hook ready
- UL 8750 and UL 1598 suitable for damp locations
- Rated for -20°C to 40°C ambient temperatures
- High efficiency of 130 lumens per watt and maintenance free
- DLC listed (or pending)
- 110-277V or 347V, 0-10V dimmable

ORDERING INFORMATION

Product Code	Wattage	Lumens	CCT	CRI
VLST-2FT-20W-40K-UNV	20W	2,620 lm	4000K	80
VLST-4FT-18W-40K-UNV	18W	2,340 lm	4000K	80
VLST-4FT-23W-40K-UNV	23W	2,990 lm	4000K	80
VLST-4FT-26W-40K-UNV	26W	3,380 lm	4000K	80
VLST-4FT-30W-40K-UNV	30W	3,900 lm	4000K	80
VLST-4FT-35W-40K-UNV	35W	4,550 lm	4000K	80
VLST-4FT-40W-40K-UNV	40W	5,200 lm	4000K	80
VLST-4FT-46W-40K-UNV	46W	5,980 lm	4000K	80

ACCESSORIES / OPTIONS

Product Code	Description
"347 ADDER"	347V option: order separately, factory installed step-down transformer
"VLST SENSOR"	Step-dimming sensor with mounting box, factory installed, order separately

* Consult factory for current DLC product codes.

To Order:
 Phone: 1-800-495-2677
 Email: svc@vllightingsolutions.com

 1628187 Ontario Ltd.
 1738 Orangebrook Crt., Unit 13
 Pickering, ON L1W 3G8 Canada