


WP20X LED Wall Pack

40W to 120W

CSA, cUL, cETL, or equal

Project Reference: _____ Fixture Type: _____ Cat. No.: _____ Voltage: _____ Options: _____

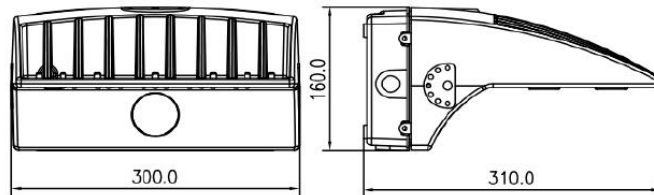

SPECIFICATIONS

- Operating location = wet
- Operating temperature = -35°C to +50°C
- CRI > 70; THD < 20%
- Power factor > 0.9; frequency = 50/60 Hz
- LM70 = 50,000 hours

ORDERING INFORMATION

WP _____ - _____ - _____ - _____ - _____

Model Product Code	CCT	Distribution	Dimming	Finish
WP201L-40W = 4000 lm	30K = 3000K	T2 = Type II		
WP202L-65W = 6800 lm	35K = 3500K		00 = No dimming	BR = Bronze (RAL8028)
WP203L-80W = 8200 lm	40K = 4000K	T3 = Type III	10 = 0-10V dimming	WH = White (RAL9010)
WP204L-100W = 9600 lm	45K = 4500K		SR = with sensor	BL = Black (RAL9017)
WP205L-120W = 13,000 lm	50K = 5000K	T4 = Type IV		
	57K = 5700K			

Ex. WP201L-40W-30K-T2-00-BR

OPTIONS

Product Code	Description
H	For 200-480V option, replace "L" in product code above with "H"
C	For 100-277V with photoelectric switch option, replace "L" in product code above with "C"

Note: 120W model not available in 200-480V.