

# CBG 200-2

2V 200AH

Deep Cycle Gel



## CBG200-2



## Physical Specification





Part Number:	<b>CBG200-2</b>
Length:	<b>170 ± 2 mm (6.69 inches)</b>
Width:	<b>110 ± 2 mm (4.33 inches)</b>
Container Height:	<b>328 ± 2 mm (12.91 inches)</b>
Total Height (with terminal):	<b>350 ± 2 mm (13.78 inches)</b>
Approx Weight:	<b>Approx 13.5 kg (29.76lbs)</b>

## Specifications

Terminal Type	Nominal Voltage	2V
	Nominal Capacity (20HR)	200AH
	Standard Terminal	T11
Container Material	Optional Terminal	-
	Standard Option	ABS
Rated Capacity	Flame Retardant Option (FR)	ABS (UL94:VO)
	213.3 AH/106.65A	(20hr, 1.80V/cell, 25°C / 77°F)
Max Discharge Current	200.0 AH/20.00A	(10hr, 1.80V/cell, 25°C / 77°F)
	172.0 A H/34.4A	(5hr, 1.75V/cell, 25°C / 77°F)
	149.7 AH/49.9A	(3hr, 1.75V/cell, 25°C / 77°F)
	117.3 AH/117.3A	(1hr, 1.60V/cell, 25°C / 77°F)
Internal Resistance	1400A (5s)	
Discharge Characteristics	Approx 1.13mΩ	
	Operating Temp. Range	Discharge: -20 ~ 55°C (-4 ~ 131°F)
		Charge: 0 ~ 40°C (32 ~ 104°F)
		Storage: -20 ~ 50°C (-4 ~ 122°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 50.0A. Voltage 2.4V ~ 2.5V at 25°C (77°F) Temp. Coefficient -5mV/°C
Standby Use	No limit on Initial Charging Current Voltage 2.25V ~ 2.3V at 25°C (77°F) Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Design Floating Life at 20°C	15 Years	
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

## Dimensions

### T11 Terminal

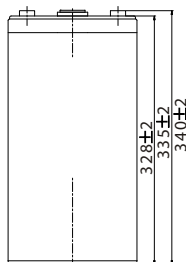

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE


## Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	174.0	136.8	104.3	90.6	57.8	44.1	36.5	31.5	27.2	24.1	21.7	19.8	18.8	10.24
1.80V/cell	199.8	152.8	115.2	100.0	62.6	47.2	38.7	33.1	28.6	25.2	22.8	20.9	19.6	10.67
1.75V/cell	224.4	168.0	124.3	106.8	66.3	49.9	40.6	34.4	29.6	26.1	23.5	21.5	20.0	10.88
1.70V/cell	241.8	180.0	132.0	113.2	70.3	51.9	41.9	35.4	30.6	27.0	24.2	22.1	20.5	11.03
1.67V/cell	251.4	187.2	136.8	117.3	72.1	53.6	42.9	36.2	31.1	27.4	24.6	22.4	20.7	11.13
1.60V/cell	272.4	200.0	146.9	124.6	75.0	55.7	44.5	37.3	31.9	27.9	25.0	22.8	21.1	11.29


## Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	330.4	261.6	200.6	175.0	112.1	85.7	71.2	61.7	53.5	47.5	42.9	39.2	37.2	20.3
1.80V/cell	374.4	289.4	219.6	192.2	120.8	91.4	75.2	64.7	56.0	49.5	44.8	41.2	38.7	21.1
1.75V/cell	415.8	314.7	234.7	204.2	127.6	96.4	78.6	66.8	57.7	51.2	46.2	42.4	39.5	21.5
1.70V/cell	443.2	334.8	248.4	215.6	134.6	100.1	80.9	68.7	59.6	52.8	47.5	43.4	40.4	21.8
1.67V/cell	455.5	343.5	255.1	221.7	137.4	102.9	82.7	69.9	60.4	53.4	48.0	43.9	40.8	21.9
1.60V/cell	488.1	364.6	272.6	234.2	142.2	106.5	85.5	71.9	61.7	54.3	48.8	44.8	41.5	22.2


### Discharge Characteristics

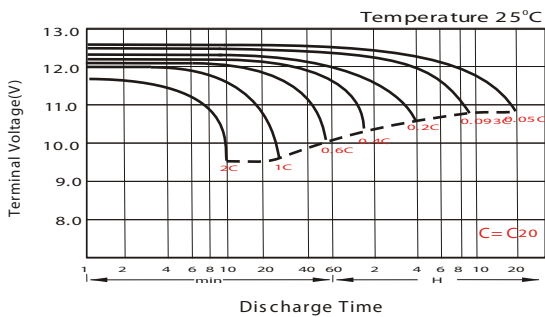


### Float Charging Characteristics

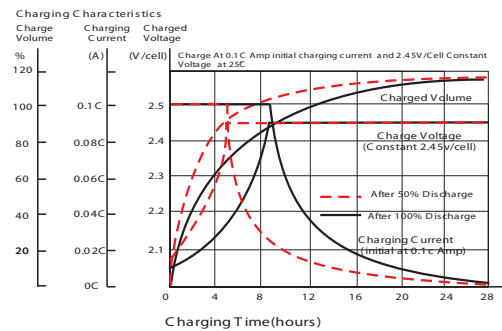


### Temperature Effects in Relation to Battery Capacity

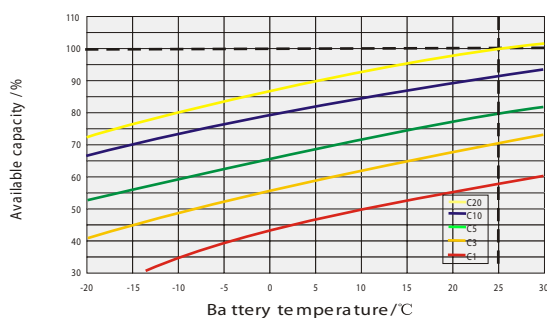


### Effect of Temperature on Long Term Float Life

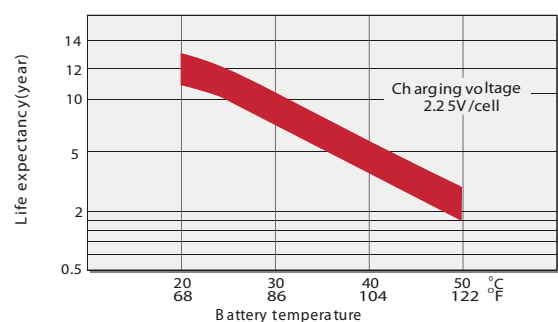

### Cycle Life in Relation to Depth of Discharge

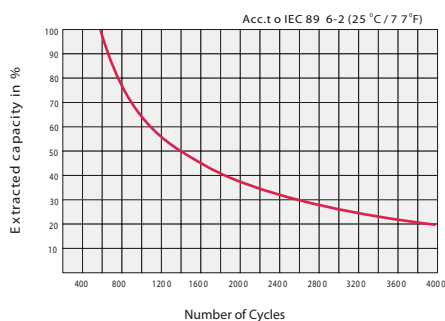

### General Relation of Capacity VS. Storage Time

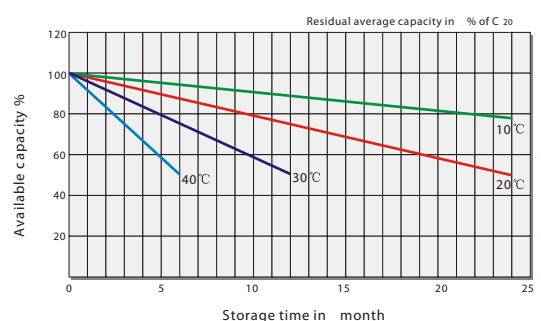

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE