

THE **Finisher 2by** SERIES  
SPRAY PAINT BOOTH LIGHTING

Catalog Number	Type
Notes	

**#HXP2**  
120 - 277vAC

**LEDO** hazardous LOCATION  
lighting EQUIPMENT

**Class/Division**

<b>C1/D1</b>	<b>C1/D2</b>	<b>C2/D1</b>	<b>C2/D2</b>	<b>C3</b>
--------------	--------------	--------------	--------------	-----------

**T-Rating: T5**



Finisher 2by2 (23 3/4" x 23 3/4" w 8"d)  
50, 100 & 150 Watt Configurations

Finisher 2by4 (47 3/4" l x 23 3/4" w 8"d) 100, 150, 200 & 300 Watt Configurations

**KEY FEATURES & BENEFITS**

- 2x2 and 2x4 Lay-In Troffers
- Ambient temperature: -50°C (-85°F) to 65°C (149°F).
- Class 1 Division 1 & 2 (Flammable Gases & Vapors).
- Class 2 Division 1 & 2 (Combustible Dusts).
- Class 3 (Combustible Flyings & Fibers).
- Corrosion proof – Coated marine grade copper free aluminum housing.
- Flat Tempered Glass
- 5-Year limited warranty

Certified to UL 844 Ed. 13  
IEC 60529 Tested

Certified to UL 1598  
LEL Approved

Certified to C22.2 No. 137 Rev 2009

Certified to C22.2 No. 250.0

Certified to C22.2 No. 30-M-1986 Rev 2012



**SPECIFICATIONS**


NAME	The Finisher 2by	Efficacy	140 lm/w
Category	Hazardous Area Paint Booth Light	Lifetime	60,000 hr. at L70
Model #	HXP2	CRI	>80 warm white / >70 cool white
Voltage	120-277vAC	Beam Angle	≥ 110°
Class / Divisions	C1 / D1 & D2, Groups C, D C2 / D1 & D2, Groups E, F, G C3 / D1 & D2	Power Factor	>0.95
Ambient Temperatures	-65° to 65°C (185°F)	Color Temp (Kelvin)	3000 & 5000 Kelvin
T – Rating	T5	Weight	Consult Factory
Housing	Copper Free Marine Grade Aluminum Alloy	NPT	3/4"
Color	White Lay-In Panel / Gray Fixture	Warranty	5-Year Limited
Lens	Flat Tempered Glass		
Wattage	50 / 100 / 150 Watts per fixture		

HXP22-050	50 Watts	6,250 Lumens
HXP22-100	100 Watts	12,500 Lumens
HXP22-150	150 Watts	17,500 Lumens
HXP24-100	100 Watts	11,666 Lumens
HXP24-150	150 Watts	17,500 Lumens
HXP24-200	200 Watts	23,333 Lumens
HXP24-300	300 Watts	35,000 Lumens

**PRODUCT ORDERING SELECTION**

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
<b>Series</b>		<b>Type-Watts</b>		<b>Kelvin</b>		<b>Voltage</b>		<b>Beam Angle</b>		<b>Options</b>						
HXP22	<input type="checkbox"/>	050 - 50w	<input type="checkbox"/>	56 - 5600K (Std)	<input type="checkbox"/>	U - 120-120vAC	<input type="checkbox"/>	60 - 60°	<input type="checkbox"/>	HFM -						
HXP24	<input type="checkbox"/>	100 - 100w	<input type="checkbox"/>	45 - 4500K			<input type="checkbox"/>	125 - 125°	<input type="checkbox"/>	Hard Flange Mount						
	<input type="checkbox"/>	150 - 150w	<input type="checkbox"/>	30 - 3000K												
	<input type="checkbox"/>	200 - 200w														
	<input type="checkbox"/>	300 - 300w														

**MOUNTING OPTION**

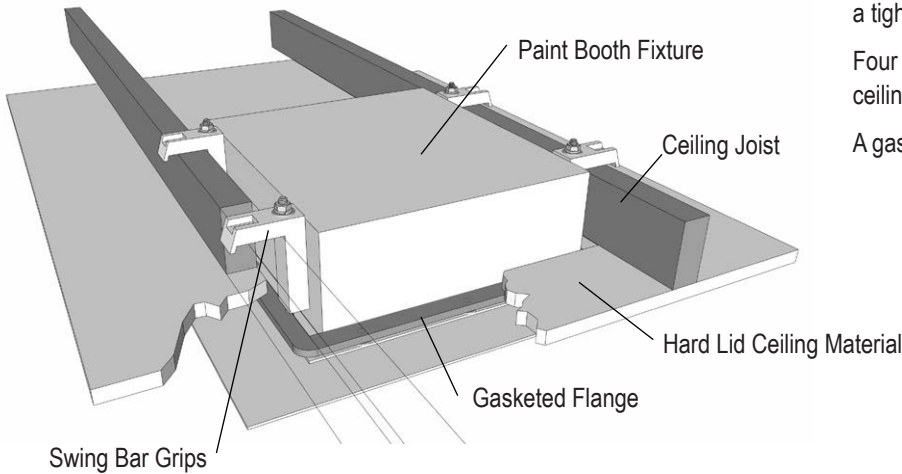

**Hard Flange Mount  
 # HFM**


The Finisher 2by features a flange mounting system for a tight recess mount application to hard lid ceilings.

Four swing bar grips secure the fixture against the hard ceiling mounting surface.

A gasketed flange - seals the fixture against the surface.

**DIMENSIONS**

**HXP22**

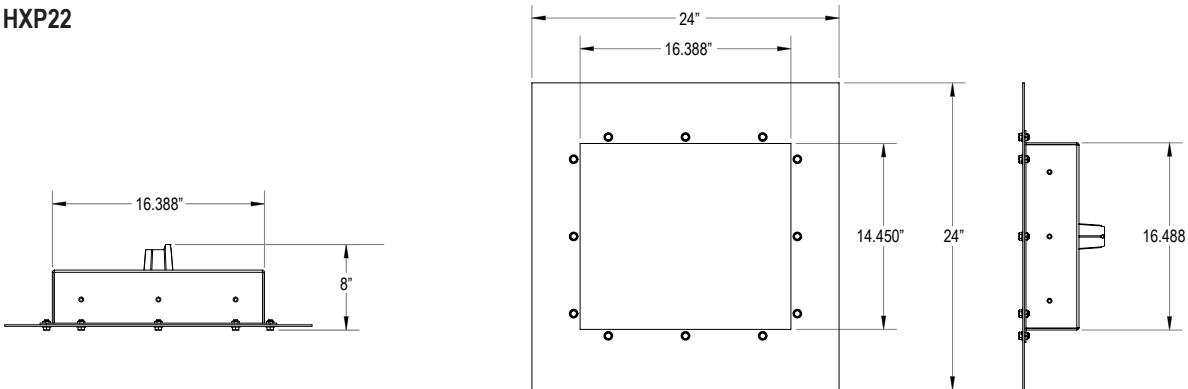

**HXP24**

