

Directional[®]SERIES

unit equipment LIGHTING

CUT SHEET



NEMA4X Emergency Light
#NNUE
 120 - 277VAC


Catalog Number	Type
Notes	

LED commercial & Industrial performance LIGHTING EQUIPMENT



KEY FEATURES

- Two fully adjustable, ultra-bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Housing is reinforced polycarbonate construction in white, gray or black.

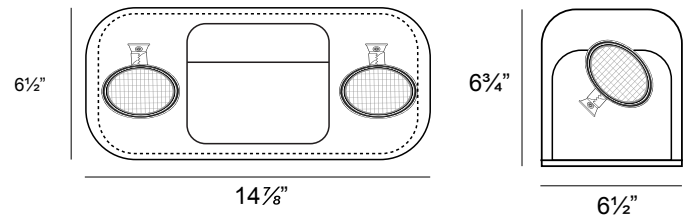

SPECIFICATIONS

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (15W models).
- 6V/12V maintenance-free, rechargeable sealed lead acid battery (36W & 54W).
- Offers 7.8W, 28.8W, 46.8W of remote capacity (6V/12V DC output) standard on the 15W, 36W and 54W models.
- Internal solid-state transfer switch automatically connects internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours (36 hours on the 54W model).

MOUNTING

- Universal knockout pattern on back plate for wall mount snaps into place making internal electrical connections.
- Suitable for wall mount.

HOUSING

- Housing is reinforced polycarbonate construction in white, gray or black.

- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens & molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation & meets electrical & life safety codes.
- CW: Optional internal heater / battery blanket for extreme cold temperatures, (-25°C – 50°C MR-16 halogen) (-25°C – 40°C LED).
- TP: Tamper-proof hardware helps discourage unauthorized access.

WARRANTY / LISTING

- Five year warranty on all electronics and housing.
- NiCd battery prorated for five years.
- Lead Acid batteries prorated for two years.

CERTIFICATIONS

- IP66 Rated, Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NEMA4X Rated and UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.
- UL listed for wet locations (0°C – 50°C on 15W and 10°C - 40°C on 36W / 54W models).

PRODUCT ORDERING SELECTION

Model	Battery Voltage	Wattage	Housing Color	Options
NNUE	<input type="checkbox"/> 6 - 6 volts <input type="checkbox"/> 12 - 12 volts	<input type="checkbox"/> 15 - 15 watts <input type="checkbox"/> 36 - 36 watts <input type="checkbox"/> 54 - 54 watts	<input type="checkbox"/> W - White <input type="checkbox"/> B - Black	<input type="checkbox"/> SDT - Self-Diagnostic (Battery Backup only) <input type="checkbox"/> CW - Cold Weather <input type="checkbox"/> TP - Tamper-Proof



Specifications and data are subject to change without notice.