

THE **Mariner** **FOUR FOOTER**

#HQB4

120 - 277vAC or 346 - 480vAC

Class/Division

C1/D2

T-Ratings: T4



LED hazardous LOCATION lighting EQUIPMENT

KEY FEATURES & UNIQUE BENEFITS

- HazLoc ambient temperature capabilities: -25°C to 40°C (104°F).
- Heavy-Duty Die Cast Aluminum Housing.
- Tapped Conduit Entry All Four Sides.
- Gray Powdercoat Finish Over a Chromate Conversion Coating.
- Clear or Opal Polycarbonate Vandal-Resistant Lens.
- Class 1 Division 2 (Flammable Gases & Vapors).
- Internal Surge Protection - 6kV.
- Easy installation and maintenance.
- Also available as Non-HazLoc Harsh Location.

Typical applications include walkways, stairwells, hallways, loading docks, wet locations and hazardous areas.



SPECIFICATIONS

NAME The Mariner 4
 Category Hazardous Area Linear Lighting
 Model # HQH4
 Voltage 120 - 277vAC
 Class / Divisions C1 / D2, Groups A, B, C, D
 Ambient Temperatures -25°C to 40°C (104°F)
 T - Rating T4
 Housing Marine Grade Aluminum Alloy
 Color Gray
 Lens Clear Polycarbonate Vandal-Resistant Lens
 Opal Polycarbonate Vandal-Resistant Lens
 Wattage 126w, 152w
 Lifetime 170,000 hr. at L₇₀ (25°C)
 CRI >70 cool white
 Power Factor >0.90

Color Temp (Kelvin) 4000 & 5000 Kelvin
 Dimensions 49" x 7" H x 4.25" D
 NPT 1/2"
 Warranty 5-Year Limited

MODEL	DESCRIPTION	WATTAGE	CLEAR LENS	OPAL LENS
HQH4-112	Open Face	126	16,287 Lm	13,720 Lm
HQH4-136	Open Face	152	19,773 Lm	16,594 Lm


PRODUCT ORDERING SELECTION

<input type="checkbox"/> HQ	<input type="checkbox"/> H4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series	Frame Type	Wattage	Kelvin	Lens	Voltage	Color	Mounting Options
HQ	<input type="checkbox"/> H4-Open	<input type="checkbox"/> 126-126 Watts <input type="checkbox"/> 152-152 Watts	<input type="checkbox"/> 4K-4000K <input type="checkbox"/> 5K-5000K	<input type="checkbox"/> PC-Clear Polycarbonate <input type="checkbox"/> LPC-Opal Polycarbonate	<input type="checkbox"/> U-120-277 <input type="checkbox"/> 48-347-480	<input type="checkbox"/> GR-Grey	<input type="checkbox"/> PV-Pivot Mount



MOUNTING



The Mariner Hazardous Location Light requires the Stainless Steel Pivot Mount or Yoke Mount in order to maintain its Hazardous Location Certification.



Stainless Steel Yoke
YK

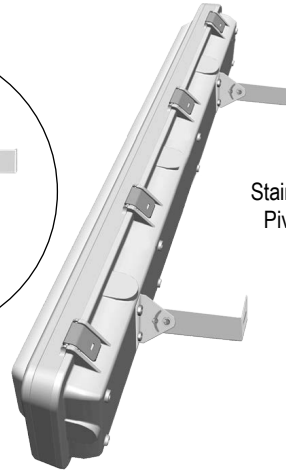

Stainless Steel
Pivot Mount
PV

DIMENSIONS

