

NARROW vapor tight LINEAR BAY LIGHTING

SVN

120-277vAC

IP65 IP66 IP67



SVN4

4" W x 51" L x 4" H

Catalog Number	Type
Notes	

KEY FEATURES & BENEFITS

- UL 5VA Fiberglass housing will not melt or burn.
- Housing features poured-in-place gaskets.
- 120-277V and 347-480VAC Multivolt 0-10V Dimmable Drivers.
- Wash down design protects your lights in demanding environments.
- Entry holes are 7/8" diameter with water-tight rubber plug.
- Very durable and easy to clean with captive latch design.
- Stainless steel hardware (Tamper Resistant SS Screws Available).
- High impact resistant acrylic lenses in Clear or Frosted, Smooth or Ribbed.
- 5-Year limited warranty.

APPLICATIONS

Ideal for parking garages, cold storage, marinas, barns, canopies, car washes, poultry farms, agricultural applications and other areas susceptible to corrosive and wet conditions.



SPECIFICATIONS

Housing	UL 5VA Fiberglass
Color	White
Lens	Acrylic Clear / Frosted / Smooth / Ribbed
Wattage	24W / 35W / 42W / 48W / 55W
Efficacy	116 Lumens per watt
L70 Lifetime	60,000 hr. at L70
CRI	84+
Input Voltage	120 - 277vAC / 347 - 480vAC
Color Temp.	3000K / 3500K / 4000K / 5000K
Ambient Temp.	-30°C (-22°F) to +45°C (115°F)

PRODUCT SELECTION

CATALOG #	DIMENSIONS	WATTAGE	LUMENS
SVN4-24	4"W x 51.8"L	24W	2,800lm
SVN4-35	4"W x 51.8"L	35W	4,100lm
SVN4-42	4"W x 51.8"L	42W	5,600lm
SVN4-48	4"W x 51.8"L	48W	5,600lm
SVN 4-55	4"W x 51.8"L	55W	6,400lm

PRODUCT ORDERING INFORMATION

Series	Wattage	Voltage	Lens Material	Lens	Kelvin	Options and Mounting Accessories
SVN4 - 4 Ft.	<input type="checkbox"/> 024 - 24W <input type="checkbox"/> 035 - 35W <input type="checkbox"/> 042 - 42W <input type="checkbox"/> 048 - 48W <input type="checkbox"/> 055 - 55W	<input type="checkbox"/> DMV - 120-277vAC Multivolt 0-10V Dimmable	<input type="checkbox"/> A - High Impact Acrylic (Standard) <input type="checkbox"/> P - Polycarbonate (Option)	<input type="checkbox"/> RF - Ribbed Frosted <input type="checkbox"/> RC - Ribbed Clear <input type="checkbox"/> SF - Smooth Frosted <input type="checkbox"/> SC - Smooth Clear	<input type="checkbox"/> 30-3000K <input type="checkbox"/> 35-3500K <input type="checkbox"/> 40-4000K <input type="checkbox"/> 50-5000K	<input type="checkbox"/> PC120 - Photo Cell 120 <input type="checkbox"/> PC277 - Photo Cell 277V Occupancy Sensors <input type="checkbox"/> OS - Sensor only <input type="checkbox"/> OSW - Wet Location <input type="checkbox"/> OSC - Cold Location <input type="checkbox"/> OSD - Sensor / 0-10V Dimming <input type="checkbox"/> SS - Internal Microwave OCC Sensor Emergency Backup Battery Packs <input type="checkbox"/> EM - 10 Watt ~ 1300 lm <input type="checkbox"/> EM5 - 5 Watt ~ 650 lm Mounting Accessories <input type="checkbox"/> CMB - Ceiling Mount (2) <input type="checkbox"/> AC120 - Y-Hook Cable (2) <input type="checkbox"/> VHM - V-Hook Mount (2) <input type="checkbox"/> MB45 - 45° Angle Mount (2) <input type="checkbox"/> HBB - Hanging Bracket with Bail (2) <input type="checkbox"/> SSL - Stainless Steel Latches

ACCESS

PRODUCT WEB PAGE

IES FILES

PRINT

Specifications are subject to change without notice.

CO SVN 4.23.19

See page 2 for cord and whip options and mounting accessories.

NARROW vapor tight LINEAR BAY LIGHTING

OPTIONS AND MOUNTING ACCESSORIES




Stainless Steel Mounting Bracket
SV-MB2L (2-pack)



Stainless Steel Mounting Bracket
with Bail # SV-MB2L-B (2-pack)




45° Mounting Bracket
SV-MB2L-45 (2-pack)



White Polycarbonate Latches
(Standard)




Stainless Steel Latches
SSL (Option)



Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP – Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK – Black	(Blank) 120-277V	15 - 15 Amps
CS – Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH – White	120 - 120V	20 - 20 Amps
		10 - 10 feet	TL* - Twist Lock		277 - 277V	
		12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

DIMENSIONS:

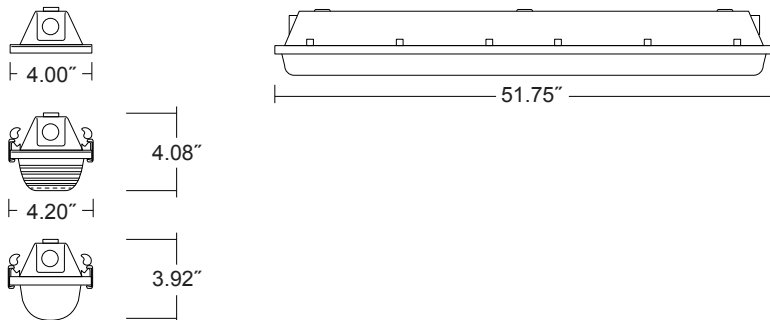

Specifications and data are subject to change without notice.

