

# THE Reacher

Safety Efficiency Productivity

CUT SHEET



**Harsh Environment Lighting**  
**#DLYL**  
 120 - 277vAC

Catalog Number	Type
Notes	

**LED** commercial & Industrial performance LIGHTING EQUIPMENT

**Operating Temperature**  
 -22°C to +45°C (113°F)



## KEY FEATURES & UNIQUE BENEFITS

- Heavy-Duty design built with rugged components.
- Designed to withstand harsh loading dock environments.
- Easily positions to provide exceptional light inside entire length of trailer.
- Accomplishes OSHA standard 1910 requiring loading docks to be lighted.
- Fixtures feature a powdercoat finish in "Safety Yellow", standard.
- 40" and 60" Reachers can be configured with options and accessories.
- Built-in heat dissipation - always cool-to-the-touch.
- On/Off Switch on 40 & 50 watt versions.
- Twist Knobs for adjustments & locking standard.



## SPECIFICATIONS

<b>Wattages</b>	20, 30, 40, 50
<b>Input Voltages</b>	120-277vAC
<b>Lumen Range</b>	2,200 to 6,000
<b>Lumens per Watt</b>	110 to 120 lm/w
<b>Power Factor</b>	>0.90
<b>CCT/ KELVIN</b>	3000K, 4000K, 5000K, 5700K, 6500K
<b>CRI</b>	>80
<b>Beam Angle</b>	90° 120°
<b>Body Material</b>	Aluminum
<b>Color</b>	Safety Yellow Powdercoat
<b>Lens</b>	Tempered Glass (Std)
<b>Ambient Temperature</b>	-22°C to 45°C (113°F)

Model #	Wattage	Lumens	Efficacy	Lamp Size
DLYL-020	20w Lamp	2,200	110 lm/w	6" Diameter
DLYL-030	30w Lamp	3,300	110 lm/w	6" Diameter
DLYL-040	40w Lamp	4,400	110 lm/w	8" Diameter
DLYL-050	60w Lamp	6,000	120 lm/w	8" Diameter

**NOTE:** Mounting Arm configurations are selected separately.

## PRODUCT ORDERING SELECTION

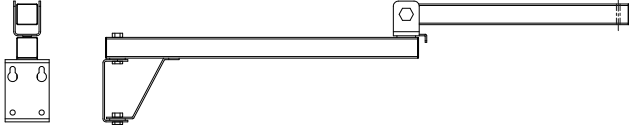


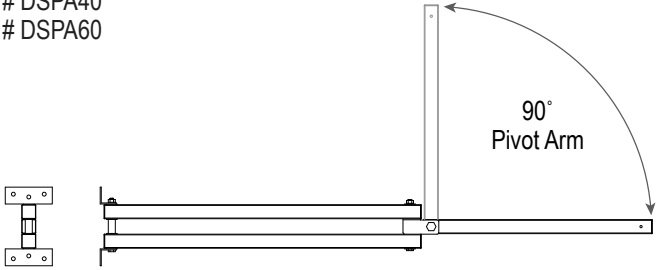
DLYL	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
<b>Series</b>	<b>Wattage</b>	<b>Kelvin</b>	<b>Voltage</b>	<b>Beam Angle</b>	<b>Mounting Arm Configurations</b>							
DLYL	<input type="checkbox"/> 020 - 20 Watts	<input type="checkbox"/> 40 - 4000K	<input type="checkbox"/> U-120-277	<input type="checkbox"/> 90° - 90° Angle	<input type="checkbox"/> SSA40S - 40" Single Swing Arm / Square Mount Plate <input type="checkbox"/> SSA40 - 40" Single Swing Arm / H Mount Plate <input type="checkbox"/> SSA60 - 60" Single Swing Arm / H Mount Plate <input type="checkbox"/> DSA40 - 40" Double Swing Arm / H Mount Plate <input type="checkbox"/> DSA60 - 60" Double Swing Arm / H Mount Plate <input type="checkbox"/> DSPA40 - 40" Double Swing Pivot Arm / H Mount Plate <input type="checkbox"/> DSPA60 - 60" Double Swing Pivot Arm / H Mount Plate							
	<input type="checkbox"/> 030 - 30 Watts	<input type="checkbox"/> 50 - 5000K		<input type="checkbox"/> 120° - 120° Angle								
	<input type="checkbox"/> 040 - 40 Watts	<input type="checkbox"/> 57 - 5700K										
	<input type="checkbox"/> 050 - 50 Watts	<input type="checkbox"/> 65 - 6500K										

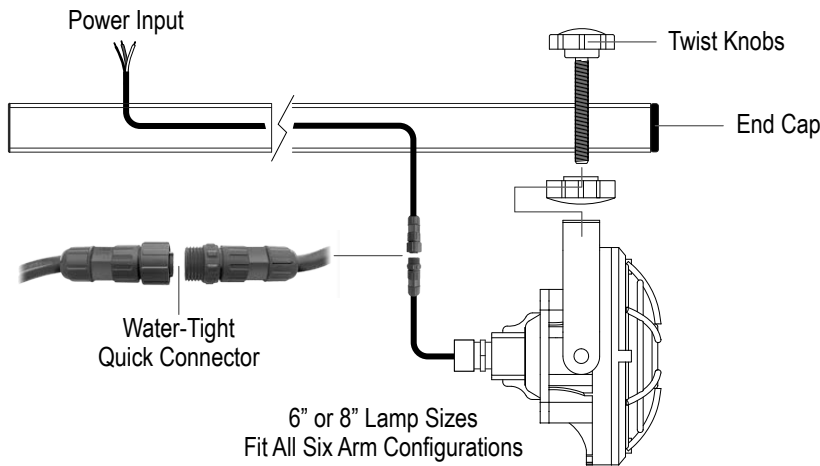


Specifications and data are subject to change without notice.



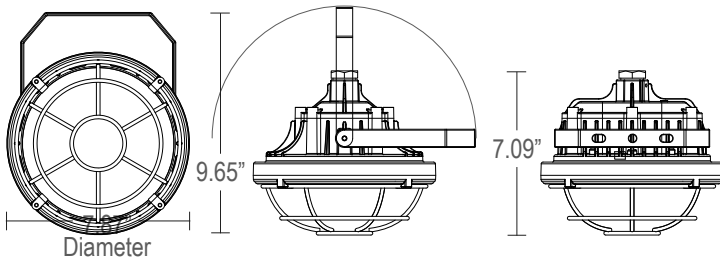
**ARM CONFIGURATIONS**

<p><b>40" Single Swing Arm with Square Mounting Plate</b>                  # SSA40S</p> 	<p><b>40" and 60" Single Swing Arm with "H" Mounting Plate</b>                  # SSA40                  # SSA60</p> 
<p><b>40" and 60" Double Swing Arm with "H" Mounting Plate</b>                  # DSA40                  # DSA60</p> 	<p><b>40" and 60" Double Swing Pivot Arm with "H" Mounting Plate</b>                  # DSPA40                  # DSPA60</p> 



**LAMP DIMENSIONS**

**8" Lamp - 40 / 50 watts**



**6" Lamp - 20 / 30 watts**

