



CUT SHEET



BAY & FLOOD LIGHTING
#HL
 120 - 277vAC / 347 - 480vAC

Catalog Number	Type
Notes	

LED hazardous LOCATION lighting EQUIPMENT

Class/Division

C1/D2	C2/D2
-------	-------

KEY FEATURES & UNIQUE BENEFITS

T-Ratings: **T5**

- 14" Diameter design delivers optimal light output to large surface areas.
- Class 1 Division 2 - Groups A, B, C, D (Flammable Gases & Vapors).
- Class 2 Division 2 - Groups F, G (Combustible Dusts).
- Ambient temperature capabilities: -40° C to 65° C (149° F).
- Passive cooling radiator design for high temperature applications / locations.
- Corrosion proof – Coated aluminum alloy housing.
- Gray nylon corrosion resistant powder coat.
- NSF Rated waterproof and spray resistant at IP 66.
- Angle mounted COB LEDs for high efficacy and lighting in all directions.



SPECIFICATIONS

NAME The mini Beast
 Category Hazardous Area Bay Light
 Model # HL
 Voltage 120 - 277vAC or 347 - 480vAC
 Class / Divisions C1 / D2, C2 / D2, C3/D1&2
 Ambient Temperatures Ambient to 65° C (149° F)
 T – Rating T5
 Housing Coated Aluminum Alloy
 Color Gray
 Lens Flat Tempered Glass
 IP Rating IP66
 Wattage 53w / 106w / 166w
 Efficacy 114 lm/w, 128 lm/w, 115 lm/w
 Lifetime 100,000 hr. at L70

CRI >70 cool white
 Beam Angle 150°
 Power Factor >0.95
 Color Temp (Kelvin) 5000 Kelvin
 Weight 20 lbs.
 Dimensions 14" diameter x 4.2"
 NPT 3/4"
 Warranty 5-Year Limited

55 watts	6,061 Lumens
104 watts	13,011 Lumens
166 watts	19,058 Lumens

PRODUCT ORDERING SELECTION

		50	EX		GR		
--	--	----	----	--	----	--	--

Series	Type-Watts	Kelvin	Driver	Voltage	Color	Mounting Options	Other Options
HL06	<input type="checkbox"/> 055 - 55w	<input type="checkbox"/> 50-5000K	<input type="checkbox"/> EX - External	<input type="checkbox"/> U-120-277vAC	<input type="checkbox"/> GR - Gray	<input type="checkbox"/> PM(X)-Galvanized Pendants (3", 6", 12", 18", 24")	<input type="checkbox"/> C5 - 5 ft. Safety Cable
HL12	<input type="checkbox"/> 104 - 106w			<input type="checkbox"/> 48-347-480vAC		<input type="checkbox"/> PHS-Pendant & Safety Hook	
HL16	<input type="checkbox"/> 170 - 166w					<input type="checkbox"/> WMB-Wall Mount Bracket	



MOUNTING



Pendant with Safety Clip
PHS




3, 12 & 24 inch Threaded Pendants
PM3, # PM6, # PM12, # PM18, # PM24



Wall Mount Bracket
WMB

The Perfect Combination of LEDs, Positioning, Power, Reflectivity, Primitives and More Provides Superior Benefits and Unique Advantages Over other Bay Lighting.

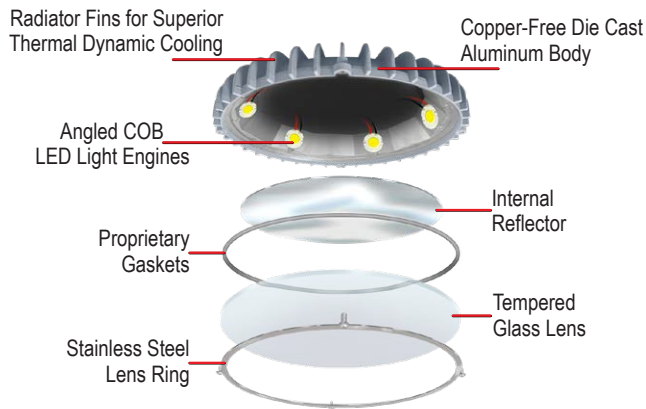

DIMENSIONS

