

Catalog Number	Type
Notes	

LED commercial & Industrial performance LIGHTING EQUIPMENT

Operating Temperature
-30°C to +40°C

KEY FEATURES & UNIQUE BENEFITS

- A viable solution as a low profile Gas Station canopy light with low wattage utilization.
- Snap-Fit mounting makes installation quick and stable.
- Dimming (1-10Vdb) is standard.
- Lightweight cast aluminum with clean, white powdercoat finish.
- Designed with a wide 18.1" low profile of 2.4" to deliver impressive illumination.
- A viable solution for Gas Station canopy lighting with 140 plus lumens per watt.
- Cooling ports dissipate heat.



SPECIFICATIONS

Name	GS Canopy Light
Category	Gas Station & Canopy Lighting
Model	#GS
Color	White Corrosion Resistant Nylon Powdercoat
Housing	Die-Cast Aluminum
Voltage	120-277vAC
Ambient Temperature	Ambient -30°C to 40°C (104°F)
Lens	Flat Tempered Glass Lens
Beam Angle	105°
IP Rating	IP65
Wattage	150w / 200w
Efficacy	140 Lumens per Watt
Lifetime	100,000 hr. at L ₇₀

CRI	Ra≥70
Power Factor	>0.95
Color Temp	4000 or 5000 Kelvin
Dimming	1-10Vdc
Weight	13.45 lbs.
Dimensions	18.1" x 18.1" x 2.4"
Warranty	5-Year Limited


150 watts	21,150 Lumens
200 watts	28,390 Lumens

PRODUCT ORDERING SELECTION

GS			U	WT
Series	Type-Watts	Kelvin	Voltage	Color
GS	<input type="checkbox"/> 15-150 - 150w <input type="checkbox"/> 20-200 - 200w	<input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	<input type="checkbox"/> U - 120-277	<input type="checkbox"/> WT - White

PHOTOMETRY

Surface Mount

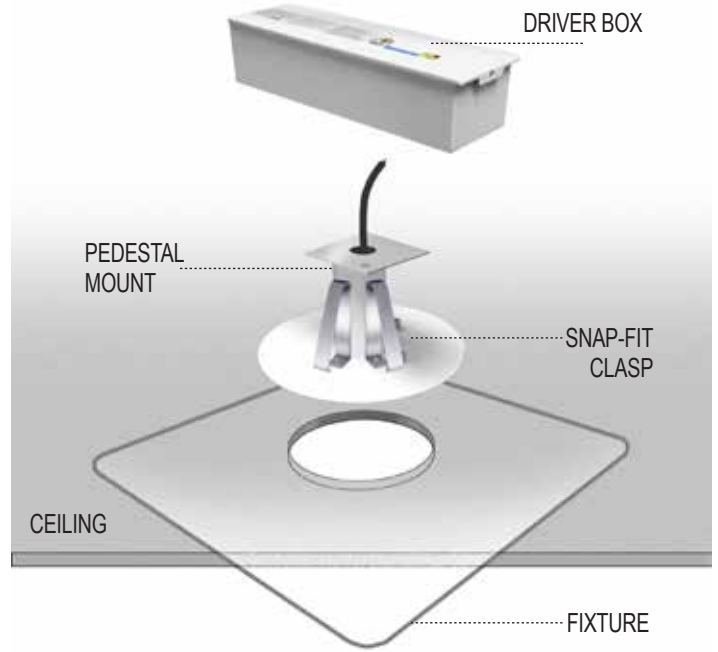

DIMENSIONS

