


# HANGER FLANGE

## HIGHLIGHTED FEATURES

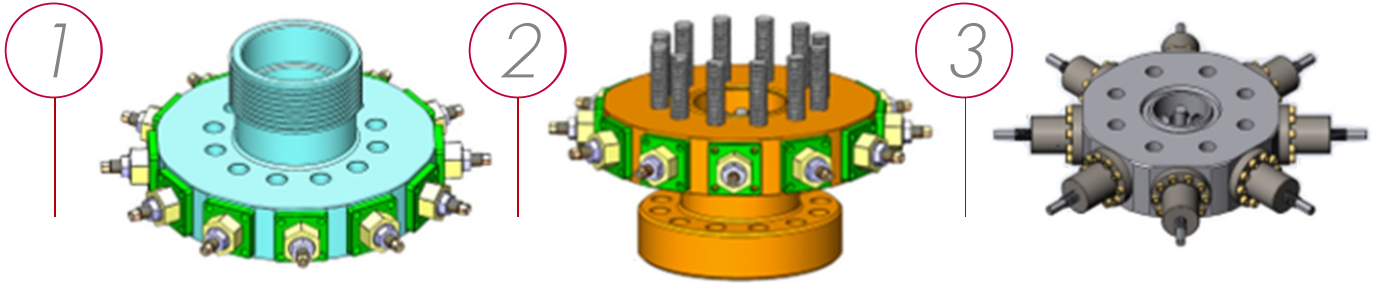

- Hanger Flange is Safety Device used to hang off Tubing String during Well Service or Under Balance Drilling Operation
- Safest way of Hanging Tubing String under Live Well Conditions
- Mostly installed as part of BOP Stack as Safety device
- Mitey Titan Industries is a leading manufacturer of Hanger Flange without using alignment pins through Ring Groove
- Advance Alignment Design for Ram Anti Rotation
- Dual Seal Design for Long life, without Packing Adjustment
- Tested to hang 1.5 Rating of no permanent deflection of Rams
- Serrated, Tool Steel Double Drawn Heat Treated Rams to reliably secure pipe
- Stainless Steel Inlay or Inconel RTJ Grooves as Option
- Option of Integral Bowen Union Connection, Studded Top & Thru Flange Bottom , Thru Top Hanger Flange & Thru Flange Bottom, Studded Top & Bottom, Drill Thru Hanger Flange
- Rentals available on Daily, Weekly, Monthly bases for Snubbing Units, Service Rigs and Drilling Rigs
- Manufactured from NACE material for H<sub>2</sub>S Service

Flange Size	4-1/16	7-1/16	9	11	13-5/8	Flange Connection Type
Working Pressure & Ring Groove Number	42,000 lbs 18,500 daN	75,000 lbs 33,300 daN	117,000 lbs 52,000 daN	150,000 lbs 66,700 daN	150,000 lbs 66,700 daN	1. Bowen Union Top & Thru Flange 2. Studded Top & Thru Flange 3. Thru Top Hanger Flange & Thru Flange Bottom 4. Studded Top & Bottom Flange 5. Drill Thru Hanger Flange 6. Double Hanger Flange 7. Custom Adapter
	23,000 lbs 10,200 daN	45,000 lbs 20,000 daN	60,000 lbs 26,500 daN	65,500 lbs 29,000 daN	150,000 lbs 66,700 daN	