

# Wall Pack LED



## TYPICAL APPLICATIONS

- > Perfect for exterior or interior lighting, this wall pack will provide enough lighting without sacrificing efficiency.



## DESCRIPTION

Designed with efficiency in mind, the Wall Pack LED has a unique funnel heat sink for better heat dissipation and longer fixture lifetime. The sloped design allows for rain and other elements to pass through the heat sink, keeping it clean. The separated LED driver and light source allows for easy installation. The Wall Pack LED is IP65 rated (suitable for wet and damp locations) and Dark Sky Compliant. Added features of this LED include the pre-installed photocell with shield, twist lock photo eye, and caulk.

## FEATURES

- > Unique funnel heat sink for better heat dissipation
- > Factory-installed twist lock photo eye, photocell & photocell shield ship with product
- > Installation caulk included with product
- > Separate LED driver and light source
- > Dark Sky compliant
- > In-series transient voltage surge suppressor (TVSS)
- > UL1598 Listed
- > Warranty details can be found at [www.tactiklighting.com](http://www.tactiklighting.com)



Photocell Shield

# Wall Pack LED




## SPECIFICATIONS

Power Factor.....>0.9  
 Input Voltage ..... 120/277V & 347/480V  
 Performance.....Up to 107 lm/W  
 Calculated Lifetime .....>76,000 Hours  
 Operational Temperature..... -40°C (-40°F) - 50°C (122°F)  
 Color Rendering Index .....>80  
 Distribution..... Type III, Short  
 Mount Type..... Wall Mount  
 Available Wattages..... 24W, 48W, 80W, 120W  
 Available Color Temperatures.....3000K, 4000K, 5000K

## DISTRIBUTION

The light distribution curve shows you how the light will react within a space. In the chart below, the horizontal center line of the graph is the ceiling, and the colored charted lines are how the light will react from the ceiling to the floor for a certain distribution.

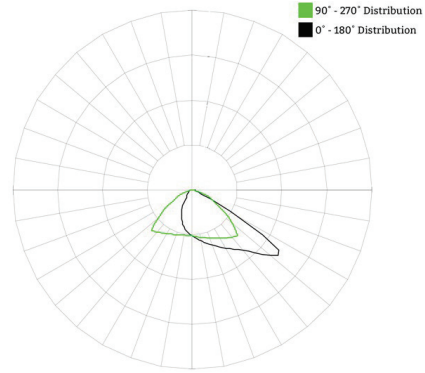

## LUMINOUS OUTPUT

Wattage	3000K	4000K	5000K
24W	2208 lm	2237 lm	2527 lm
48W	4122 lm	4122 lm	4575 lm
80W	7884 lm	7808 lm	8432 lm
120W	11827 lm	11957 lm	12831 lm

## ORDERING INFORMATION

SAMPLE ORDER NUMBER: EPM-WP-048-50-3S-1-BZ

Manufacturer	Series	Wattage	Color Temp.	Optic Distribution	Input Voltage	Color
EPM - ePOWER Manufacturing	WP - Wall Pack	024 - 24W 048 - 48W 080 - 80W 120 - 120W	30 - 3000°K 40 - 4000°K 50 - 5000°K	3S - Type III/Short	1 - 120/277V 2 - 347/480V	BZ - Bronze WH - White BK - Black GR - Gray CC - Custom Color
EPM	WP			3S		


\*Fixture cord not included – see Cord Spec Sheet for ordering information.

# Wall Pack LED



## DIMENSIONS

24W & 48W Wall Packs

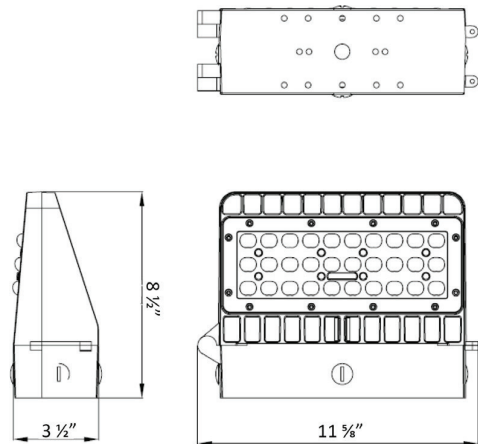

80W & 120W Wall Packs

