


## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

## PUSH IN SREIES

## Features of Spring Clamp Terminal Blocks

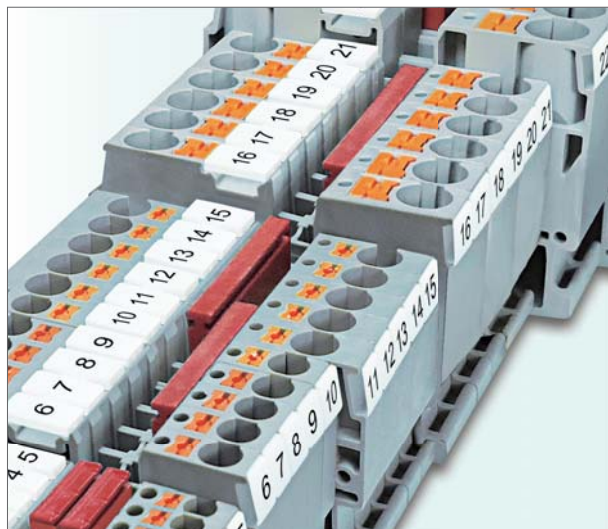


## Features of Spring Clamp Terminal Blocks








- Space-saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion-proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

## 彈片壓接型接線座之特性


- 節省空間之特性 / 前緣導線連接方式
- 高強度壓力的彈度迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

DPT 1.5




Specifications (產品規格)	1.5mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 26-14	
CSA	600V / 15A / AWG 26-14	
IEC	17.5A/500V/0.14-1.5mm <sup>2</sup>	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)	● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	3.5 x 45 x 32	
For TS35x7.5 	3.5 x 45 x 39.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	DD-PT1.5	50
Comb Link (邊接式聯接件) 	DFBS2-3.5	50
	DFBS3-3.5	50
	DFBS4-3.5	50
	DFBS5-3.5	50
	DFBS10-3.5	10
Marking Tags (標記號) 	DUC-TM3.5	10
	DUC-TM3.5	10
Tool (工具) 	DS2	

## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

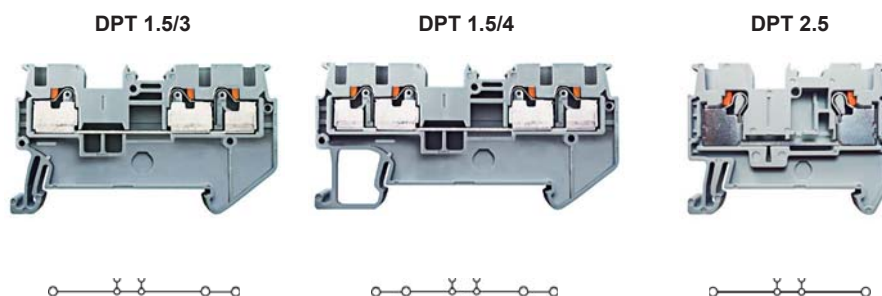

Specifications (產品規格)	1.5mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>			
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size					
UL	600V / 15A / AWG 26-14	600V / 15A / AWG 26-14	600V / 20A / AWG 26-12			
CSA	600V / 15A / AWG 26-14	600V / 15A / AWG 26-14	600V / 20A / AWG 26-12			
IEC	500V / 17.5A / 0.14-1.5mm <sup>2</sup>	500V / 17.5A / 0.14-1.5mm <sup>2</sup>	30A/800V/0.14-2.5mm <sup>2</sup>			
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	6KV / 3	8KV / 3			
Insulation stripping length (mm) (撥線長度)	10mm	10mm	10mm			
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)					
For TS35x7.5	3.5 x 54.1 x 32	3.5 x 63.2 x 32	5.2 x 48.5 x 36.5			
For TS35x7.5	3.5 x 54.1 x 39.5	3.5 x 63.2 x 39.5	5.2 x 48.5 x 44			
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-PT1.5/3	50	DD-PT1.5/4	50	DD-PT2.5	50
Comb Link (連接式聯接件)	DFBS2-3.5	50	DFBS2-3.5	50	DFBS2-5	50
	DFBS3-3.5	50	DFBS3-3.5	50	DFBS3-5	50
	DFBS4-3.5	50	DFBS4-3.5	50	DFBS4-5	50
	DFBS5-3.5	50	DFBS5-3.5	50	DFBS5-5	50
	DFBS10-3.5	10	DFBS10-3.5	10	DFBS10-5	10
Marking Tags (標記號)	DUC-TMF3.5	10	DUC-TMF3.5	10	DUC-TMF5	10
	DUC-TM3.5	10	DUC-TM3.5	10	DUC-TM5	10
Tool (工具)	DS2		DS2		DS3	

## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

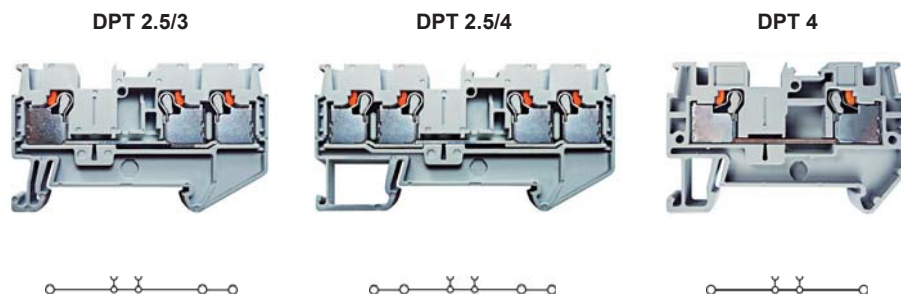


Specifications (產品規格)	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / 20A / AWG 26-12	600V / 20A / AWG 26-12	600V / 30A / AWG 24-10
<b>CSA</b>	600V / 20A / AWG 26-12	600V / 20A / AWG 26-12	600V / 30A / AWG 24-10
<b>IEC</b>	800V / 30A / 0.14-4mm <sup>2</sup>	800V / 30A / 0.14-4mm <sup>2</sup>	38A/800V/0.2-4mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (撥線長度)</b>	10mm	10mm	10mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x7.5	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5
For TS35x7.5	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT2.5/3    50	DD-PT2.5/4    50	DD-ST4-D    50
<b>Comb Link (邊接式聯接件)</b>	DFBS2-5    50	DFBS2-5    50	DFBS2-6    50
	DFBS3-5    50	DFBS3-5    50	DFBS3-6    50
	DFBS4-5    50	DFBS4-5    50	DFBS4-6    50
	DFBS5-5    50	DFBS5-5    50	DFBS5-6    50
	DFBS10-5    10	DFBS10-5    10	DFBS10-6    10
<b>Marking Tags (標記號)</b>	DUC-TMF5    10	DUC-TMF5    10	DUC-TMF6    10
	DUC-TM5    10	DUC-TM5    10	DUC-TM6    10
<b>Tool (工具)</b>	DS3	DS3	DS3

## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座




Specifications (產品規格)	4mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 30A / AWG 24-10	600V / 30A / AWG 24-10	600V / 40A / AWG 20-8
CSA	600V / 30A / AWG 24-10	600V / 30A / AWG 24-10	600V / 40A / AWG 20-8
IEC	800V / 38A / 0.2-6mm <sup>2</sup>	800V / 38A / 0.2-6mm <sup>2</sup>	52A/1000V/0.5-6mm <sup>2</sup>
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	10mm	10mm	12mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6.2 x 66.5 x 36.5	6.2 x 77 x 36.5	8.2 x 57.7 x 43.5
For TS35x7.5	6.2 x 66.5 x 44	6.2 x 77 x 44	8.2 x 57.7 x 51
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT4/3 50	DD-PT4/4 50	DD-PT6 50
Comb Link (連接式聯接件)	DFBS2-6 50	DFBS2-6 50	DFBS2-8 50
	DFBS3-6 50	DFBS3-6 50	DFBS3-8 50
	DFBS4-6 50	DFBS4-6 50	DFBS4-8 50
	DFBS5-6 50	DFBS5-6 50	DFBS5-8 50
	DFBS10-6 10	DFBS10-6 10	DFBS10-8 50
Marking Tags (標記號)	DUC-TMF6 10	DUC-TMF6 10	DUC-TMF8 10
	DUC-TM6 10	DUC-TM6 10	DUC-TM8 10
Tool (工具)	DS3	DS3	DS4

## Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

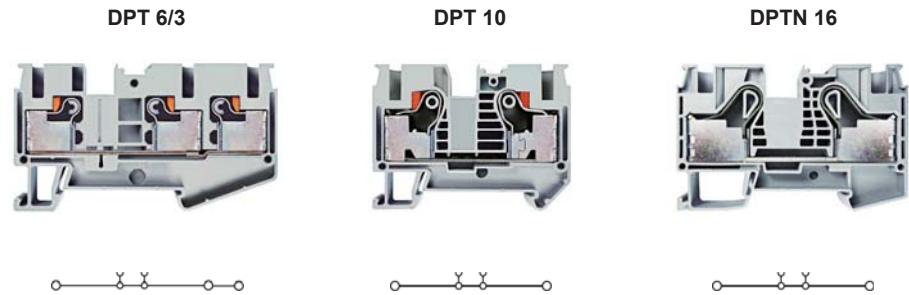

Specifications (產品規格)	6mm <sup>2</sup>	10mm <sup>2</sup>	16mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / 40A / AWG 20-8	600V / 65A / AWG 20-6	600V / 85A / AWG 20-4
<b>CSA</b>	600V / 40A / AWG 20-8	600V / 65A / AWG 20-6	600V / 85A / AWG 20-4
<b>IEC</b>	1000V / 52A / 0.5-10mm <sup>2</sup>	70A/1000V/0.2-10mm <sup>2</sup>	90A/1000V/0.5-16mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (撥線長度)</b>	12mm	18mm	18mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x7.5	8.2 x 74.2 x 43.5	10.2 x 67.7 x 50.5	12.2 x 77.6 x 51.5
For TS35x7.5	8.2 x 74.2 x 51	10.2 x 67.7 x 58	12.2 x 77.6 x 59
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT6/3    50	DD-PT10    50	DD-PT16    50
<b>Comb Link (邊接式聯接件)</b>	DFBS2-8    50 DFBS3-8    50 DFBS4-8    50 DFBS5-8    50 DFBS10-8    10	DFBS2-10    10	DFBS2-12    10
<b>Marking Tags (標記號)</b>	DUC-TMF8    10 DUC-TM8    10	DUC-TMF10    10 DUC-TM10    10	DUC-TMF12    10 DUC-TM12    10
<b>Tool (工具)</b>	DS4	DS5	DS5

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

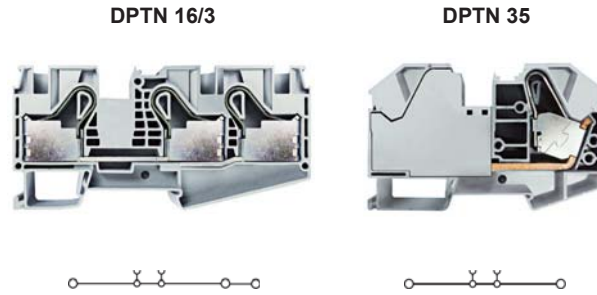

Specifications (產品規格)	16mm <sup>2</sup>	35mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
UL	600V / 85A / AWG 20-4	600V / 115A / AWG 14-2
CSA	600V / 85A / AWG 20-4	600V / 115A / AWG 14-2
IEC	90A/1000V/0.5-16mm <sup>2</sup>	1000V / 125A / 2.5-35mm <sup>2</sup>
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	18mm	25mm
Material / Available Color (材質顏色)		
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x7.5	12.2 x 104 x 51.5	16 x 100 x 63.2
For TS35x7.5	12.2 x 104 x 59	16 x 100 x 70.7
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
End Bracket (終端擋板)	SEW35    50	SEW35    50
End Plate (擋板)	DD-PT16/3    50	
Comb Link (連接式聯接件)	DFBS2-12    10	DFBS2-16    10
Marking Tags (標記號)	DUC-TMF12    10 DUC-TM12    10	DUC-TMF16    10 DUC-TM16    10
Tool (工具)	DS5	DS5