




Fiber Optic Cable

Furcation Tubing

2.9mm x 6mm Tight Buffered Zipcord Furcation Tubing (for 900um Fiber)

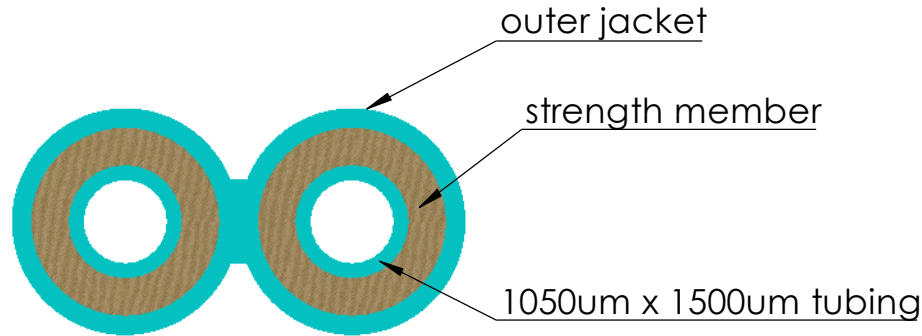

Part Number

7070ZP-1.5XXX

Replace XXX with:

- BLU - BLUE
- ORG - ORANGE
- GRN - GREEN
- BRN - BROWN
- GRY - GREY
- WHT - WHITE
- RED - RED
- BLK - BLACK
- YEL - YELLOW
- VIO - VIOLET
- PNK - PINK
- AQU - AQUA



Mechanical:

Diameter:

Outer Tube: 0.114" minor x 0.235" major
(2.9mm x 6.0mm)

Inner Tube: 0.041" x 0.060" (1050uM x 1500uM)

Tensile Load:

Installation: 220lbs (980N) Max.

Operating: 130lbs (579N) Max.

Minimum Bend Radius:

Installation: 2.28" (5.8cm)

Operating: 1.14" (2.9cm)

Cable Weight: 8.2lbs./1000ft (12kg/km)

Operating Temperature: -4F to 167F (-20C to 75C)

Storage Temperature: -40F to 167F (-40C to 75C)

Construction:

Jacket Material:

Flame Retardant PVC

Inner Tube: Hytrel

Jacket Color Options:

Blue, Orange, Green, Brown, Slate, White

Red, Black, Yellow, Violet, Pink, Aqua

Inner Tube Color: to match Outer Tube

Strength Member: Dielectric Aramid Yarn Fibers

Applications Note:

Furcation tubing for upjacketing (2) 900uM Fibers to (1) 3mm Duplex Zipcord for direct termination.

www.opticonx.com

Drawn By: PCS
Approved By: PL
Date: 10/14/14
Rev: A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.