




Fiber Optic Cable
Furcation Tubing
 2mm Low Smoke Zero Halogen Zipcord Furcation Tubing

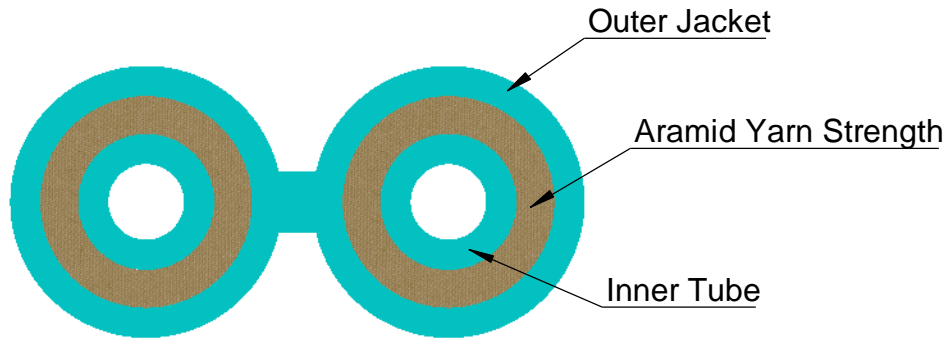

Part Number
7310ZP-XXX

- Replace XXX with:
- BLU - BLUE
 - ORG - ORANGE
 - GRN - GREEN
 - BRN - BROWN
 - GRY - GREY
 - WHT - WHITE
 - RED - RED
 - BLK - BLACK
 - YEL - YELLOW
 - VIO - VIOLET
 - PNK - PINK
 - AQU - AQUA



Mechanical:

Diameter:

Outer Tube: 0.070" minor x 0.157" major
 (1.8mm x 4.0mm) +/- 0.003" (0.08mm)
 Inner Tube: 0.020" x 0.035" (500uM x 900uM)
 +/- 0.002"/0.05mm

Tensile Load:

Installation: 60lbs (267N) Max.
 Operating: 15lbs (67N) Max.

Minimum Bend Radius:

Installation: 1.14" (5.8cm)
 Operating: 0.70" (2.9cm)

Cable Weight: 3.5lbs./1000ft (5.2kg/km)

Operating Temperature: -20F to 167F (-4C to 75C)

Storage Temperature: -20F to 167F (-4C to 75C)

Construction:

Jacket Material:

Flame Retardant Non Halogen Thermoplastic
 Inner Tube: Hytrel

Jacket Color Options:

Blue, Orange, Green, Brown, Slate, White
 Red, Black, Yellow, Violet, Pink, Aqua

Inner Tube Color: to match Outer Tube

Strength Member: Dielectric Aramid Yarn Fibers

Applications Note:

Furcation tubing for upjacketing 2 250uM Fibers to 1 2mm Duplex Zipcord for direct termination.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

www.opticonx.com

Drawn By: PCS
 Approved By: PL
 Date: 10/10/14
 Rev: A